# CR2572/BG

## 2 GANG GRID COVER PLATE METALCLAD





#### **CONSTRUCTION**

Product CategoryWiring AccessoryProduct GroupPower & ControlProduct TypeGrid SystemShapeSquare PlateMaterialMild SteelFinishPowder CoatedMounting TypeFlush/Surface

#### **POWER**

CurrentNot ApplicableCurrent TypeNot ApplicableFrequencyNot ApplicableInput VoltageNot ApplicableSwitched PolesNot ApplicableNumber of Rocker Switches0Number of WaysNot ApplicableFuse RatingNot Applicable

#### **AESTHETICS**

Plate Gang / Module Size 2 Gang
Plate Colour Birch Grey
Rocker Colour Not Applicable
Light Reflectance Value (LRV) 8
Printing Text/Type Not Applicable
Status Indicator N

 Status Indicator
 N

 Switched Outlets
 N

 Part M Compliance
 Y

 Anti Microbial Properties
 N

**Key Features & Benefits**Curved Slimline Plate
Front Fixed & Screw Retained

#### **TERMINAL**

L & N Terminal Capacity as per BS Standard
Earth Terminal Capacity as per BS Standard
Number of Earth Terminals
Cable Strip Length
Screwdriver Type Required
Torque requirement as per BS Standard L&N
Torque requirement as per BS Standard Earth
Not Applicable
Not Applicable
Not Applicable

#### **LOCATION**

Max Ambient Operating Temp as per BS Req. Not Applicable
Min Ambient Operating Temp as per BS Req. Not Applicable
Max Altitude as per BS Requirement
IP Rating

Not Applicable
Not Applicable
2000m
IP2X (Full Instinct Grid Assembly)

## **DIMENSIONAL / FIXING**

Height 86mm Width 86mm Depth Overall (Inc Rocker) 9mm **Depth Interior only** Not Applicable Gross Weight Minimum Back Box Depth Suggested Back Box Depth Not Applicable Not Applicable **Fixing Centres** 60.3mm Minimum Access Top 100cm Minimum Access Bottom 100cm **Minimum Access Left** 100cm **Minimum Access Right** 100cm **Minimum Access Front** 100cm **Minimum Access Rear** 100cm

Flush Mounting Metal Box SB655 or CR2201/BG (40mm with knockouts)

Flush Mounting Dry Lining Box SB619 (35mm)

Surface Mounting Box CR2201/BG (40mm with knockouts)

## **STANDARDS**


British Standard/s BS 5733 Other Markings/Standards CE

## **PACKAGING**

Inner Carton Qty20Customer MOQ20

### **SUSTAINABILITY**

URL to technology list https://www.crabtreecommercial.co.uk/

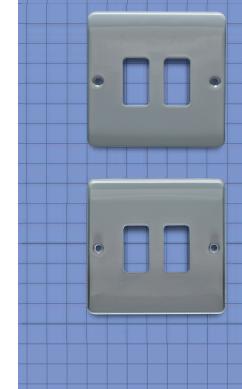

Electrium Sales Limited
A Siemens Company
Tel: +44 (0) 1543 438310

Fax: +44 (0) 1543 000000 Email: crabtree.technical@electrium.co.uk

www.electrium.co.uk

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing.

Latest details can be obtained from Crabtree.



**©**rabtree