


Technical Characteristics

	EPN510 EPN515 EPN520	EPN513 EPN518 EPN524	EPN519 EPN521	EPN525 EPN540	EPN528 EPN541	EPN529
Voltage	230V	24V	12V	230V	24V	12V
Start Consumption	24VA	24VA	24VA	48VA	47VA	TBC
Contact Rating AC1	-	-	16A 250V~ ¹	-	-	-
Electrical Endurance AC1 - 16A	150,000 Operations					
Mechanical Endurance	500,000 Operations					
Current in Open Position	8 mA					
Max Duration of Voltage Supply to Coil	1h					
Min Duration of Current Supply to Coil	0.1s					
Working Temperature	-5 to +40°C					
Storage Temperature	-40 to +80°C					
Connections						
Coil: Flexible Rigid				0.5 to 4mm ² 1 to 6mm ²		
Power: Flexible Rigid				1 to 6mm ² 1.5 to 10mm ²		

¹ 400~ for EPN540 and EPN541.

Auxiliary Contacts (EPN051)

The range of latching relays have been designed for use with an auxiliary contact. The devices simply clip on the side of the relay.

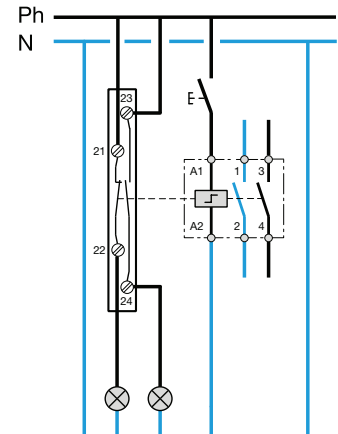

Technical Characteristics

	EPN051
Voltage	-
Contact Rating	2A / 250V
Imin / 230V	15mA

¹ Voltage dependant on associated relay

