


Technical Data


Type of wall	Rigid
Wall thickness	≥ 150 mm
Cable diameter	$OD \leq \varnothing 21$ mm
Cable loading	0% to 100%
Fire resistance	EN 1366-3 / EN 13501-2
Performance	EI90 / E120
Certification 	ETA - 18/0412

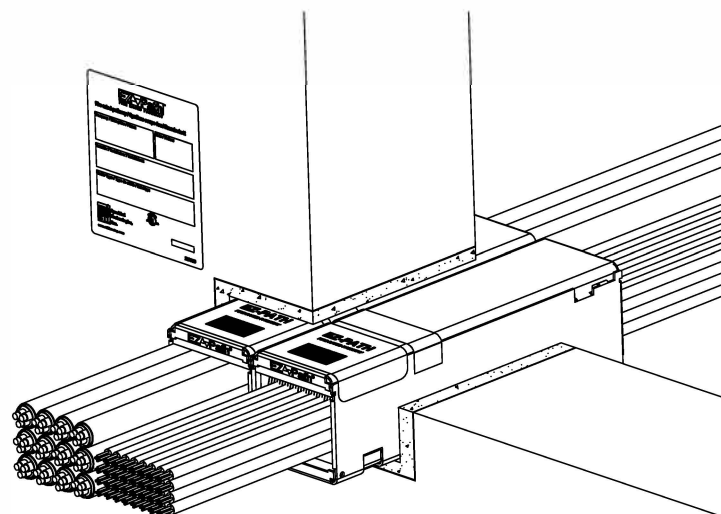

Not at scale. Units in millimeters

Please refer to the Installation Sheet for grouted **CM250018** (EZD33T)

CM250018 /
EZD33T



Opening dimensions

Opening	1 x CM250018 (1 x EZD33T)	2 x CM250018 (2 x EZD33T)
X	90mm +/- 5mm	170mm +/- 5mm
Y	90mm +/- 5mm	90mm +/- 5mm

