
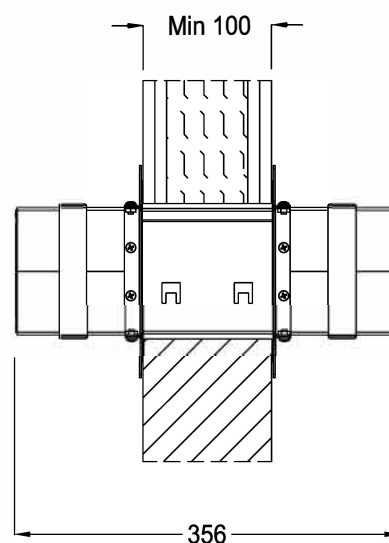
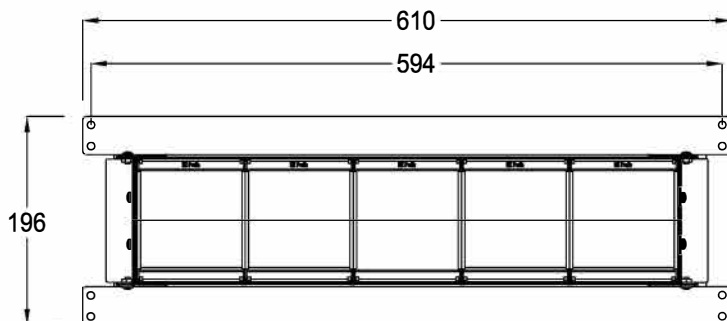
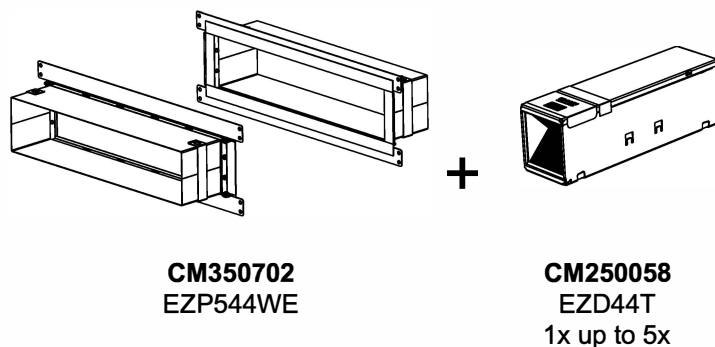
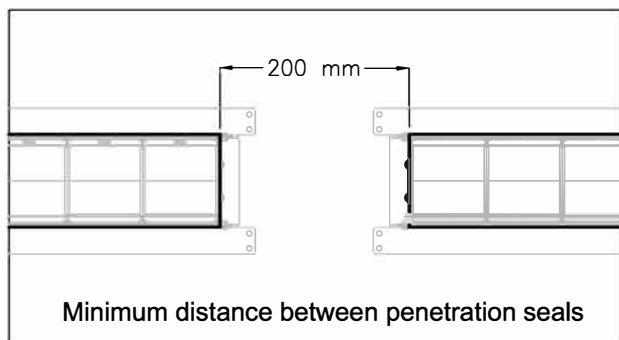

















Rigid walls and flexible walls

Minimum wall thickness	≥ 100mm
Ø cable	OD ≤ Ø 21 mm
Cable loading	0% to 100%
Opening size	Page 2/4
Performance	EI 120
Fire resistance	EN 1366-3
Classification	EN 13501-2


Not at scale. Units in millimeters

Please refer to the CM350702 Installation Sheet.

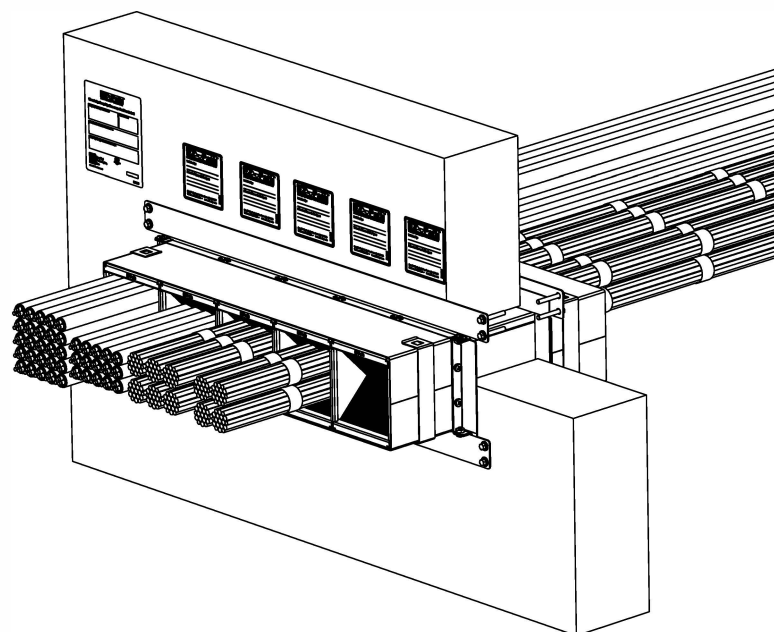


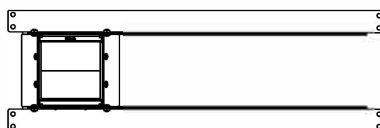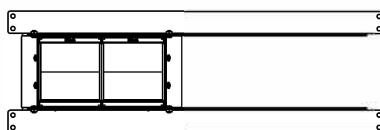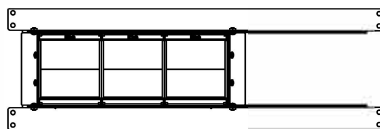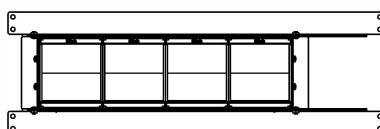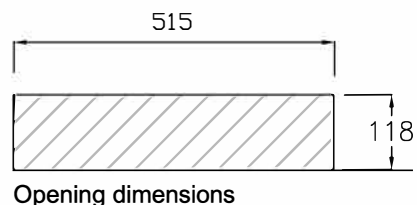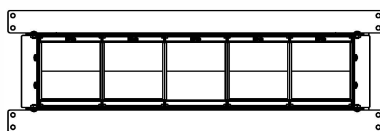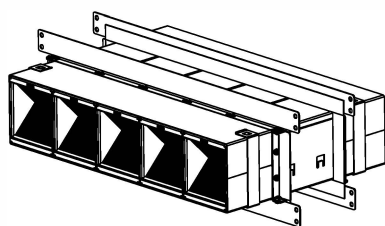

Not at scale. Units in millimeters

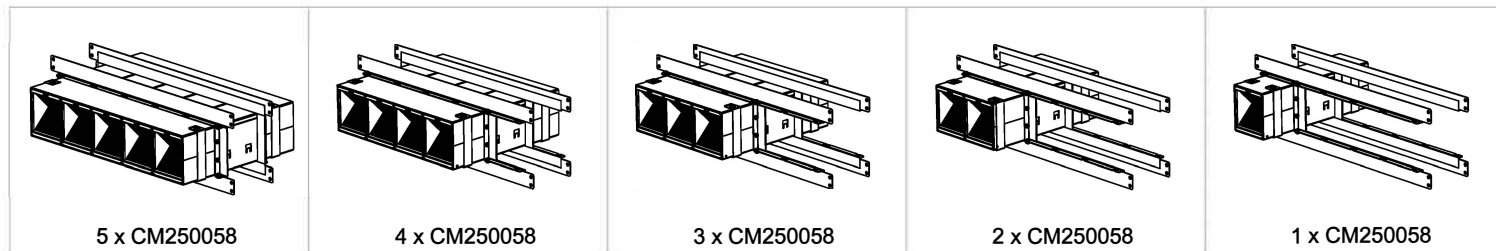


Framing construction in flexible wall

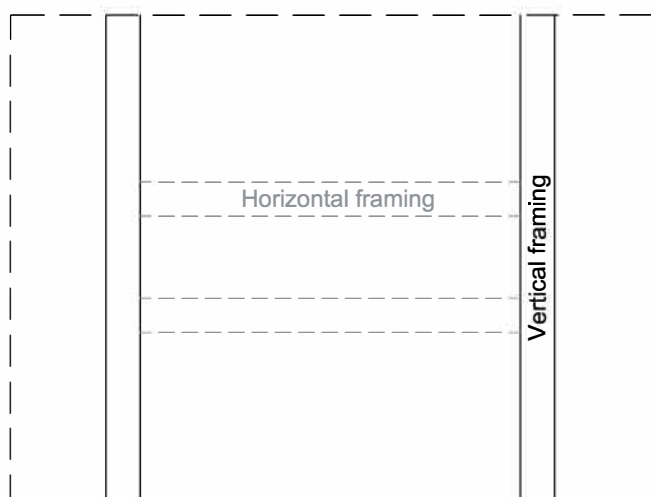

Horizontal framing is optional







Distance between attachment holes

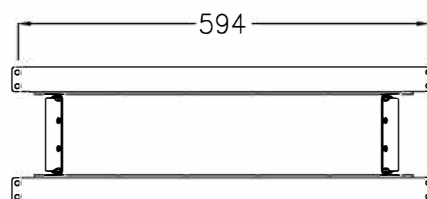

CM350702  
EZP544WE


+

CM250058  
EZD44T

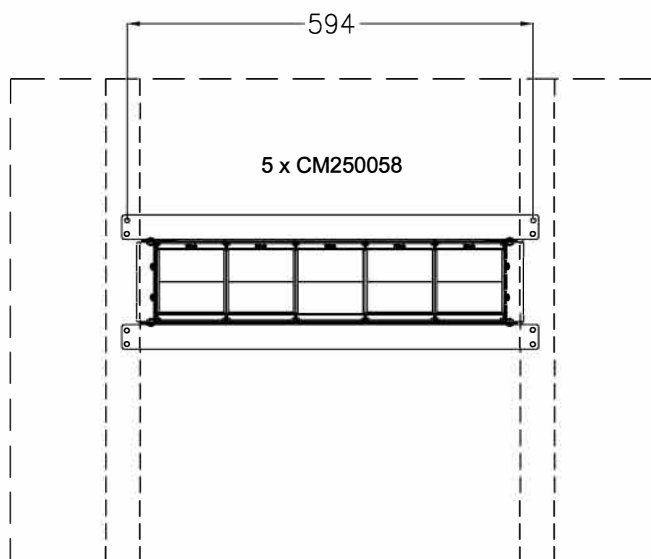


Not at scale. Units in millimeters  
Please refer to the CM350702 Installation Sheet.


Dimensions and location of the opening




a	b	c
48	515	48




a	b	c
48	309	252




a	b	c
48	206	355




a	b	c
48	105	456




a	b	c
48	412	150




a	b	c
150	309	150




a	b	c
150	206	252




a	b	c
150	105	355




a	b	c
150	412	48





a	b	c
252	309	48




a	b	c
252	206	150




a	b	c
252	105	252

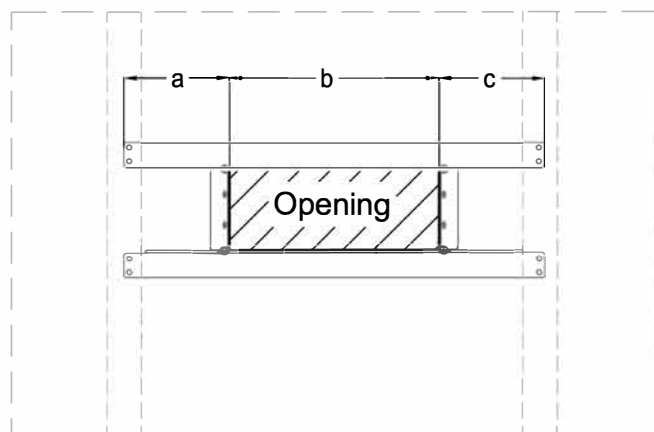


a	b	c
355	206	48



a	b	c
355	105	150



a	b	c
456	105	48

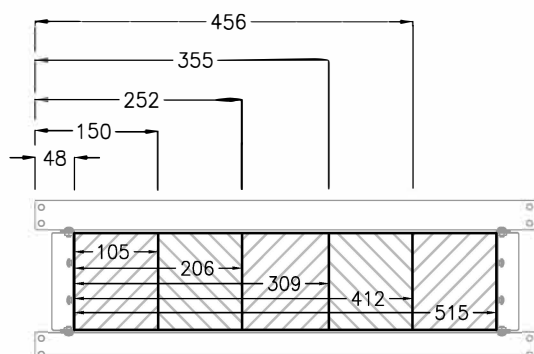

a = position of the opening from the left side of the CM350702 plate  
 b = opening width  
 c = position of the opening from the right side of the CM350702 plate  
 118 mm = opening height  
 Tolerance a / b / c = +/- 2mm

Not at scale. Units in millimeters  
 Please refer to the CM350702 Installation Sheet.