


EZ-Path® is the only fire-rated cable management system with no firestop handling


CM350704 /
EZP544MBE

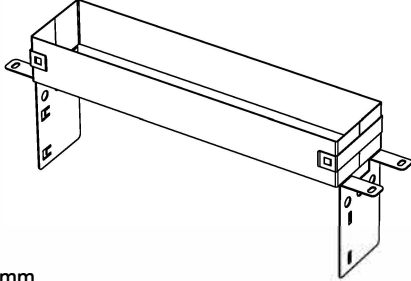

Bracket width : 56 mm

Please refer to CM350704 Application Sheet and Installation Sheet

CM250058 /
EZD44T
2 up to 5x




Device dimensions : 116 x 102 x 356 mm

Please refer to CM250058 Technical Data Sheet

To be ordered separately

CM350704 + CM250058
EZP544MBE+ EZD44T

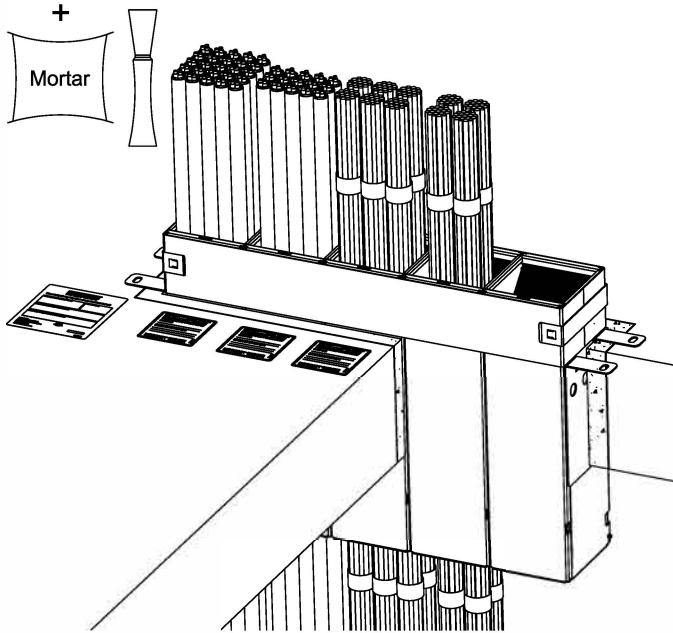

Fire rated by design / Self-sealing system

No firestop handling required for cable changes
Fire safety compliant all the time

Applications

For all types of cables up to Ø21mm OD
Rigid floors
To be used in combination with CM250058 (EZD44T)

Performance

Fire resistance : EN1366-3
Classification : EN13501-2 / E1120
European Technical Assessment ETA 18/0412
Halogen free in accordance to IEC 61249-2-21

Ordering information



CM350704




0.8




1

Opening dimensions


542 x 144 mm
(+/- 8mm)



440 x 144 mm
(+/- 8mm)



330 x 144 mm
(+/- 8mm)



216 x 144 mm
(+/- 8mm)

