



Ordering information





EZD44ES

1.1

1



Extension to be attached to the top and bottom flanges.

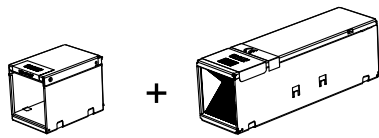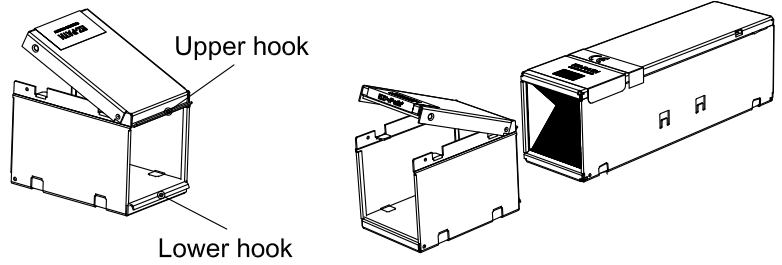

CM250178
EZD44ES

CM250058
EZD44T




Wall plate kits


| | |
|-----------------------------|--------------|
| CM350701 / EZP144RSE | X = min 50mm |
| CM350700 / EZP144WE | X = min 50mm |
| CM250230 / EZP144WT | X = min 70mm |
| CM350702 / EZP544WE | X = min 50mm |
| CM250250 / EZP544WT | X = min 70mm |

X = minimum length to accommodate for the plate and the insulation gasket


216 mm ≤ Wall thickness ≤ 368 mm




520 mm ≤ Wall thickness ≤ 672 mm

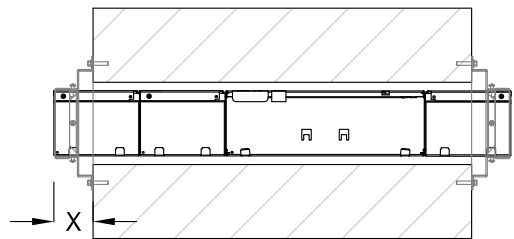

368 mm ≤ Wall thickness ≤ 520 mm

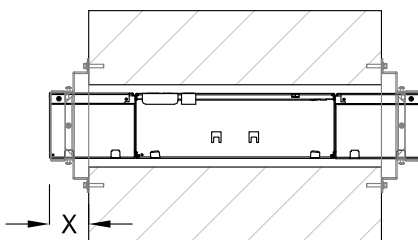

672 mm ≤ Wall thickness ≤ 824 mm

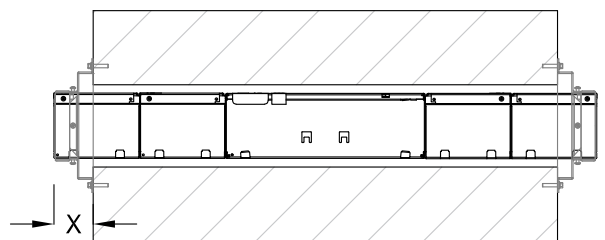

Optional, EZD44ES extension can be used for floor application