


Insulating industrial boxes

Specific accessories

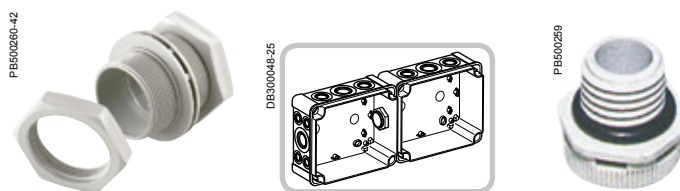


Characteristics		Coupling kit	Sealed anti-condensation valve		
		The coupling kit allows you to join several boxes with dimensions from 138 x 93 mm.	Controls the pressure to avoid condensation following an internal temperature increase. Applications Protection of equipment for luminaires, industrial control, transportation, pumps, etc.		
Material		Polystyrene 650°	PA6-V2, acrylic co-polymer membrane, water and oil repellent		
Ingress protection rating		IP66	IP68		
Installation		The kit is installed by drilling a hole with Ø 32 mm in the boxes to be coupled	The valve is installed by drilling a hole with Ø 12 mm in the box		
Usage temperature		-	-40...+105°C		
Supply		The kit consists of 2 linking parts, nuts and seals	10 valves, nuts and seals		
Drill Ø	Minor pack.	Reference	Permeability (1)	Pressure difference (2)	References
32 mm	1	13934	-	-	-
M12	10	-	16 litres/h	$\Delta P < 1$ bar	NSYCAG12LPH1
M12	10	-	120 litres/h	$\Delta P < 0.1$ bar	NSYCAG12LPH2

(1) Air flow under $\Delta P = 0.7$ bar.

(2) Condition for IP68.

Cover accessories

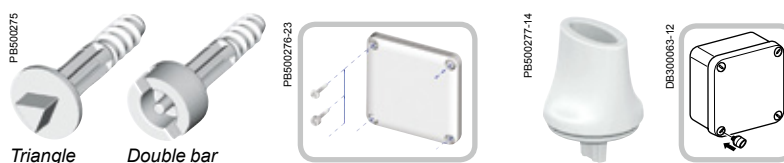

Characteristics		Set of 4 shape screws	Pack of 4 handles	
		<ul style="list-style-type: none"> The Thalassa boxes are delivered as standard with slotted-head screws for flat screwdrivers from 4 to 5.5 mm. With box sizes from 138 x 93 x 72 mm, these screws can be replaced for screws with different standardised heads, to comply with most cases. After removing the standard screw, simply position the new screw by pressing on it. The adapter clips (intermediate parts for tightening the cover on the body of the box) are the same as those for the standard screws. They are not delivered with the shape screws (see drawing on page 144). A single key for opening the boxes as well as the other enclosures of your installation. 	<ul style="list-style-type: none"> The handle (or thumbwheel) allows the screws to be handled without any tools. It is ideally associated with a box equipped with hinges. It snaps onto the head of the standard plastic screw. 	
Type	Minor pack.	Height of the lid (mm)		
		20	40	60
Triangle 6.5 mm	1	NSYAEDST620TB (1)	-	-
Triangle 8 mm	1	NSYAEDST820TB	-	-
Double bar 3 mm	1	NSYAEDSB320TB	-	-
Double bar 5 mm	1	NSYAEDSB520TB	-	-
Spare standard plastic screw	1	NSYAEDS20TB	NSYAEDS40TB	NSYAEDS60TB
Pack of 4 handles	1	-	-	NSYAEDKTB

(1) CNOMO.