


Accessories for low voltage switchboards

Vertical bar support




PB500927-60

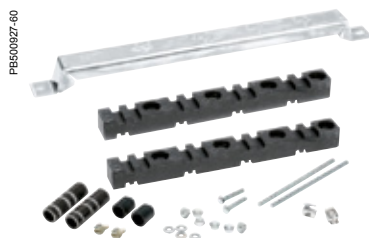


PB500929-66


| Characteristics | Vertical bar support | Setting support |
|------------------------|--|--|
| | <ul style="list-style-type: none"> Support prepared for fixing bars in vertical position, mounted directly on the structure of the enclosure. Adjustable height with a pitch of 25 mm. For a nominal rating $I_n \geq 3000$ A and ≤ 4000 A you must add one spacer ref. 04646. | <ul style="list-style-type: none"> Bottom support for bars in vertical position. It is fixed to the bottom frame of the enclosure. It is required for supporting the bars. It is not considered a bar support when calculating the number of supports. |
| Supply | 2 insulating bar supports, 1 metal vertical support and fixing elements | 1 insulating bar support, 1 metal vertical support and fixing elements |
| Width / Depth (B) (mm) | References | |
| 400 | NSYBVS400 | NSYAS400 |
| 500 | NSYBVS500 | NSYAS500 |
| 600 | NSYBVS600 | NSYAS600 |
| 800 | NSYBVS800 | NSYAS800 |
| | | |



PB500073-39



PB500028-19



PB500030-32