






Accessories for low voltage switchboards


Power busbars

Linery LGY

Linery LGY - Lateral profiles up to 1600 A

		Up to 1600 A				
Installation in Spacial SF		L 300				
						
Permissible current for an ambient temp. of 35 °C around the switchboard IP > 31		630 A 590 A	800 A 760 A	1000 A 950 A	1250 A 1170 A	1600 A 1480 A
Number of profiles per phase		1				
References		04502	04503	04504	04505	04506

Busbar supports

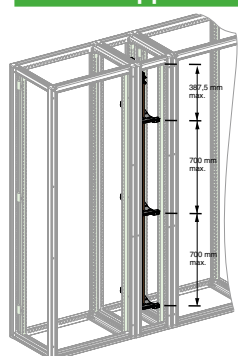


Characteristics

Number depending on Icw (kA rms/1 s)

≤ 25
≤ 30
≤ 40
≤ 50
≤ 60
≤ 65
≤ 75
≤ 85



Fixed support 04651



An end stop must be fitted on the bottom support: 01109 (sold in lots of 12)

≤ 25	3				
≤ 30	-	3			
≤ 40	-		3		
≤ 50	-			4	
≤ 60	-			5	
≤ 65	-				5
≤ 75	-				7
≤ 85	-				8


References

04651 + upright adapters NSYSFPA + NSYSUCR40**

Note

Only for depth cubicle ≥ 500 mm

Connections to the Linery BS horizontal busbar




Characteristics

Supplied with mounting hardware.
Reference include 1 connection only. Order 1 connection per phase.

References according to horizontal busbar size	5 mm thick	04634	04635
	10 mm thick	04636	
	Width ≤ 80 mm	04636 + 04642	
		04638 + 04642	
Width > 80 mm			

Connections to the Linery LGYE horizontal busbar



Characteristics

Supplied with mounting hardware.
Reference include 1 connection only. Order 1 connection per phase.

References	04602 (vertical connection)
	04603 (vertical shifted connection)