

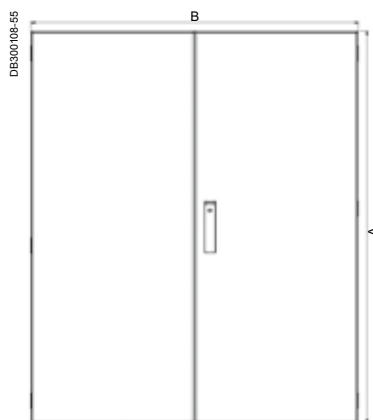



Steel wall-mounting enclosures

Dimensions

CRNG

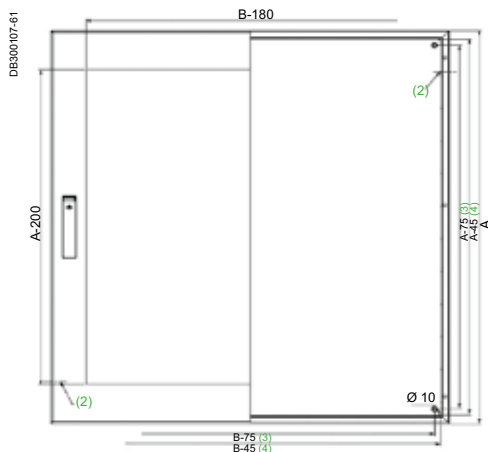

Detail (1)




Detail (2)


Dimensions of enclosure (mm)						
Width (B)	Depth (C)	J	K	L	M	
600	300-400	126	470	195	-	
800	300-400	95	320	105	400	
1000 (5)	300	125	420	105	500	
1000	300-400	95	420	105	500	
1200	300	95	420	105	500	
	400	125	420	105	600	

- (1) Four M8 x 25 back studs.
- (2) Two M6 x 17.5 earth studs.
- (3) Spacing between the studs.
- (4) Spacing between the perforations for direct fixing.
- (5) Only models 1400 x 1000 x 300.

A: Enclosure height
 B: Enclosure width
 C: Enclosure depth

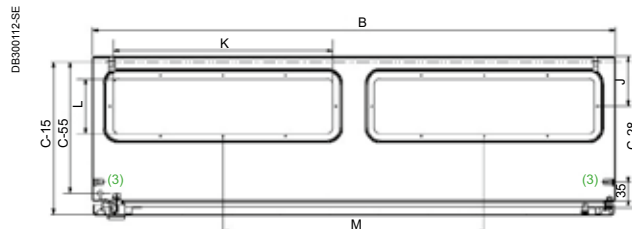

Cable entry type H: enclosure width ≥ 800 mm.

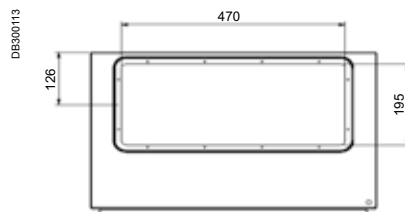

Cable entry type G: enclosure width 600 mm.

Dimensions of the door-reinforcement profiles (6)

1-door enclosure		Reinforcement profile	
Height (A)	Width (B)	F	D
800	600	620	487
1000	600	820	487
	800	820	687
1200	600	1020	480
	800	1020	687

2-door enclosure		Reinforcement profile			
Height (A)	Width (B)	Rt. Door		Lft. Door	
		F	D	F	D
800	1000	620	387	620	437
	1200	620	487	620	537
1000	1000	820	387	820	437
	1200	820	487	820	537
1200	1000	1020	387	1020	437
	1200	1020	487	1020	537
1400	1000	1020	387	1020	437

- (6) The T doors only include vertical profiles.
 - (7) 25-mm passage.
 - (8) 1 M6 x 17.5 earth stud.
- Download our DXF diagrams from our website.

