



Electronic application

Dimensions

Fixed chassis

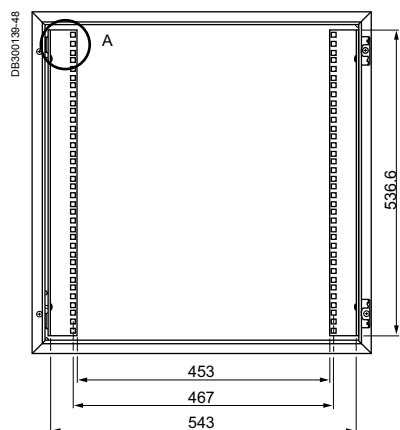



Top view

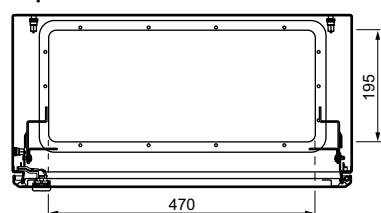



H (bars) (mm)	J (travel) (mm)
200	100
250	150
300	200
400	300

1-body 19" enclosure

Swing chassis

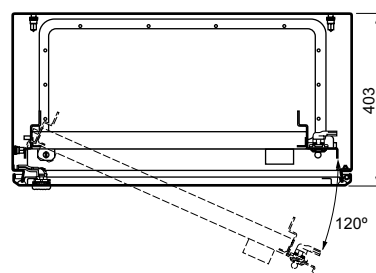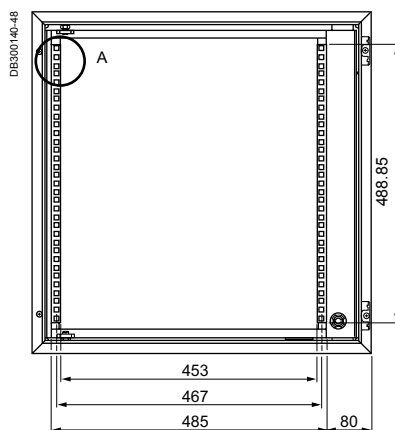

Fixed chassis mounted on the step slides

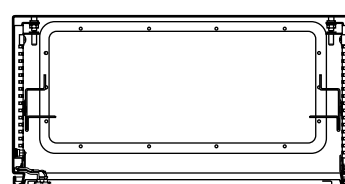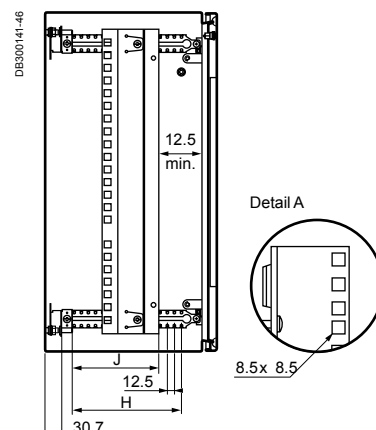

Cable-gland plate 495 x 220 mm.

2-body 19" enclosure

A (mm)	C (mm)	C1 (mm)	References
300	373	183	NSYVD2M5U4
400	373	183	NSYVD2M5U5
500	373	183	NSYVD2M8U4
700	373	183	NSYVD2M8U5
800	373	183	NSYVD2M10U4
300	473	283	NSYVD2M10U5
400	473	283	NSYVD2M14U4
500	473	283	NSYVD2M14U5
700	473	283	NSYVD2M17U4
800	473	283	NSYVD2M17U5

Cable-gland plate S3D type dimensions 245 x 80 mm.

