

SNK series terminal blocks

Range overview from 2.5 to 16 mm²




2 Connections

Single deck
Feed-through
Ground
Disconnect
Fuse



3 Connections

Single deck
Feed-through
Ground

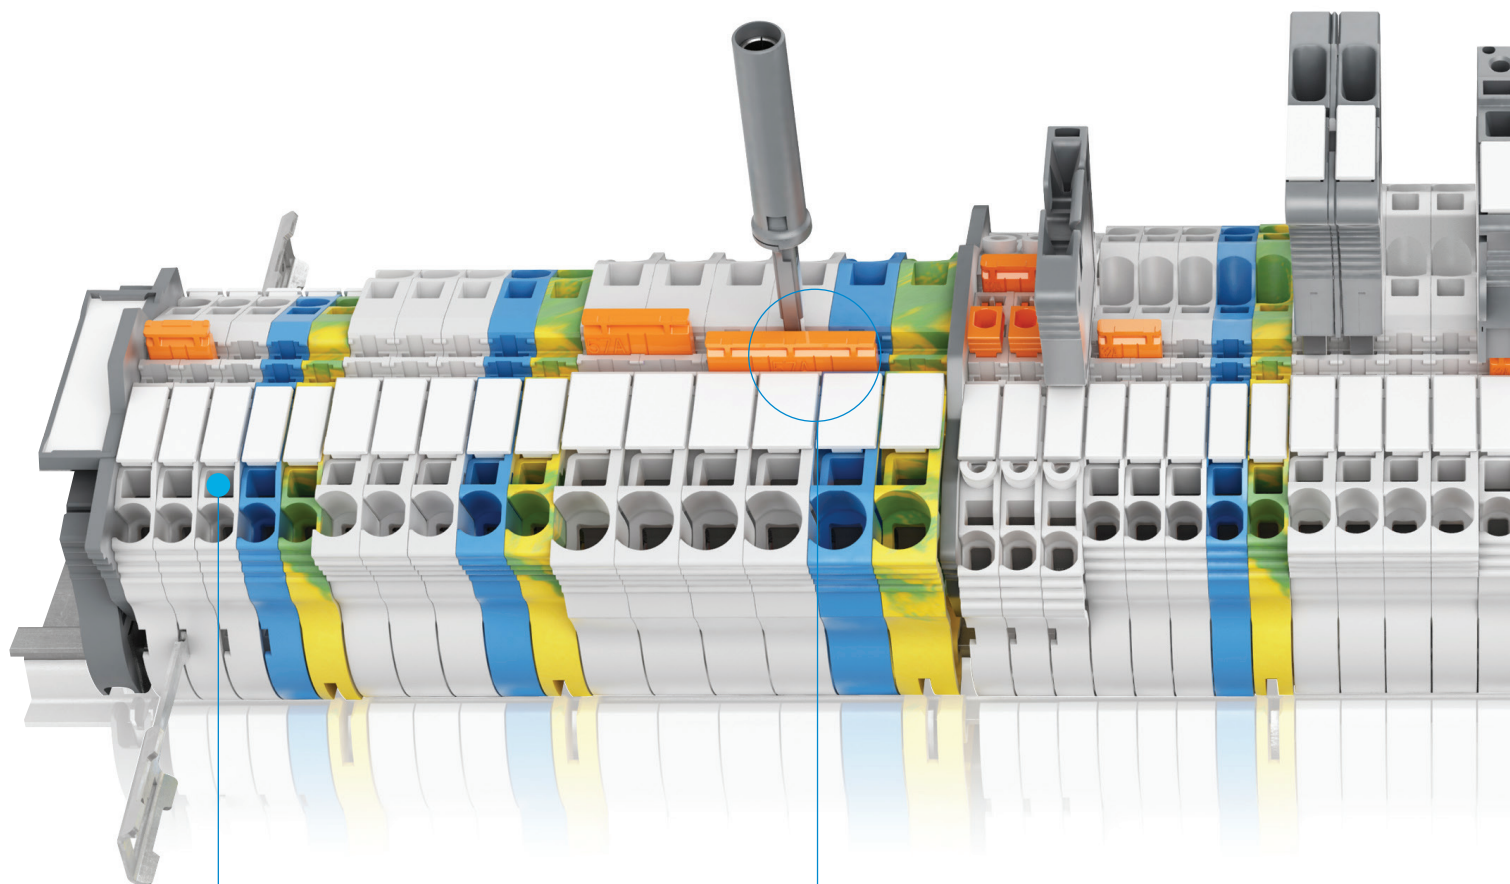

Voltage test
screwdriver entry point
accepts Category II probes

Double central channels
allows multiconfigurations
(jumping, testing and measuring)




4 Connections

Single deck
Feed-through
Ground



2x2 Connections

Double deck
Feed-through
Ground

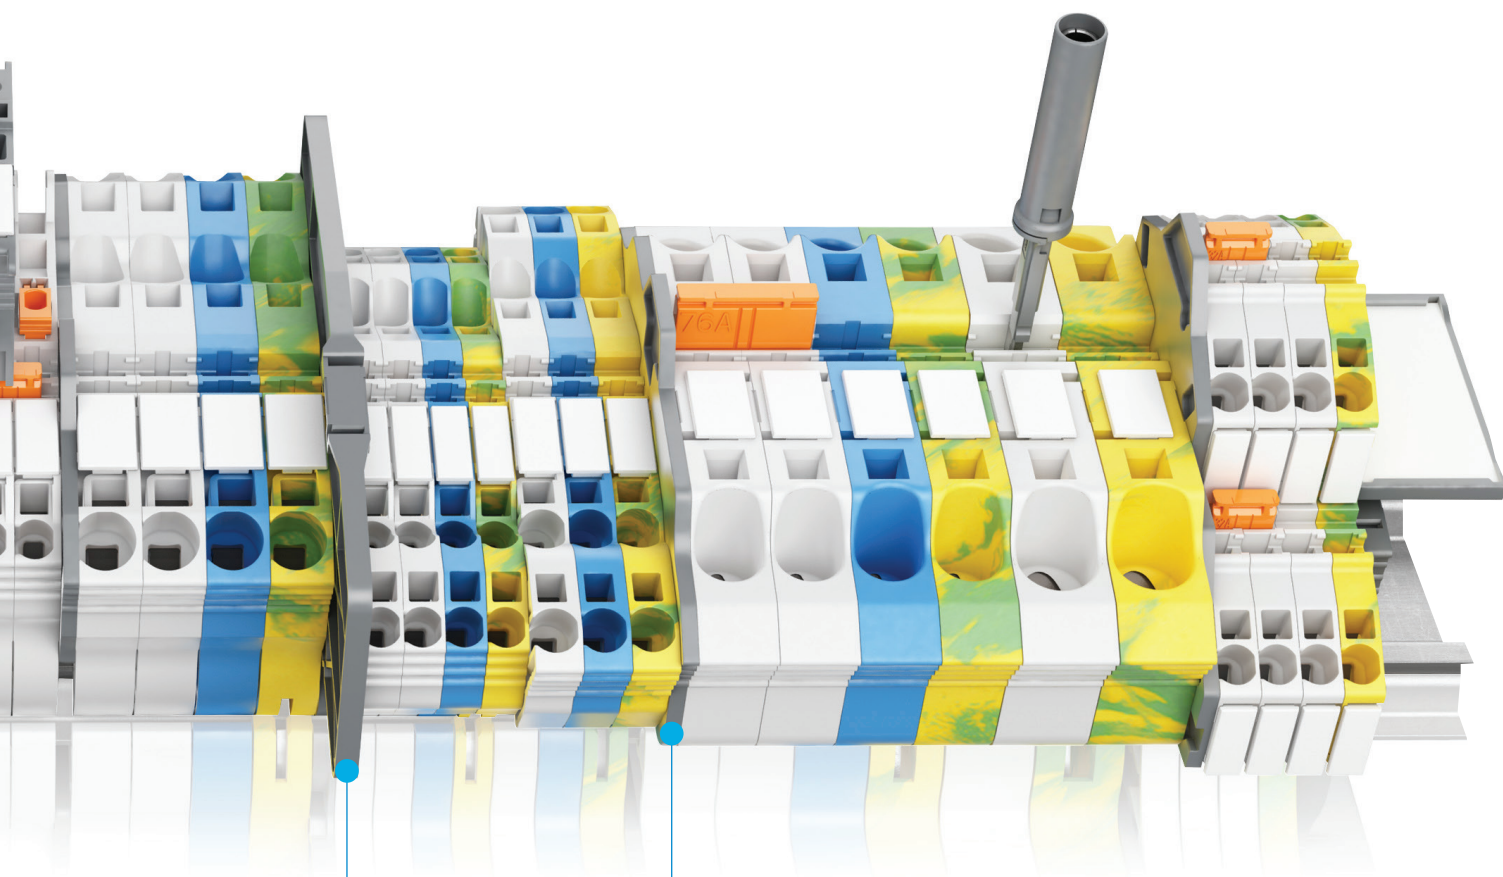

Two circuit
separators
for the entire range

End section
can be used as circuit separator