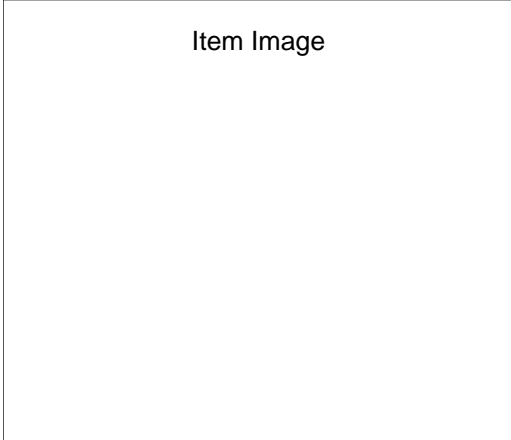



## 84DTCSB

### Sheer Floor Satin Steel 1 gang Telephone Slave Black

Item Image	Wiring	Dimensions																					
	<table border="1" data-bbox="662 472 964 604"> <thead> <tr> <th>Pin No.</th> <th>BT Wiring Schedule</th> <th>Colour Codes:</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Striped Wires</td> <td>GREEN / White</td> </tr> <tr> <td>2</td> <td></td> <td>BLUE / White</td> </tr> <tr> <td>3</td> <td></td> <td>ORANGE / White</td> </tr> <tr> <td>4</td> <td></td> <td>WHITE / Orange</td> </tr> <tr> <td>5</td> <td></td> <td>WHITE / Blue</td> </tr> <tr> <td>6</td> <td></td> <td>WHITE / Green</td> </tr> </tbody> </table> <p data-bbox="673 604 953 667">Main Wire Colour shown in CAPITALS</p> <p data-bbox="711 615 915 667">Incoming Telephone Cable On 4 wire systems, Pin 1 and 6 are not connected.</p> <p data-bbox="662 688 964 772">The maximum REN that can be connected to any one exchange line is 4. Any number of sockets may be connected. All sockets are connected in parallel, ie Pin 1 to Pin 1 ; Pin 2 to Pin 2 ; etc. as shown in the diagram above.</p>	Pin No.	BT Wiring Schedule	Colour Codes:	1	Striped Wires	GREEN / White	2		BLUE / White	3		ORANGE / White	4		WHITE / Orange	5		WHITE / Blue	6		WHITE / Green	 <p data-bbox="1234 457 1396 525"><b>Hamilton®</b> SHEER FLOOR TCS Telephone Slave Socket</p> <p data-bbox="1153 535 1477 787">Bottom Plate: 85.5, 60.3, 85.5, 18.5, 3.0, 90° Top Plate: 85.5, 93.5, 1.5</p>
Pin No.	BT Wiring Schedule	Colour Codes:																					
1	Striped Wires	GREEN / White																					
2		BLUE / White																					
3		ORANGE / White																					
4		WHITE / Orange																					
5		WHITE / Blue																					
6		WHITE / Green																					
Primary Range	Sheer Floor Sockets																						
Insert Type	1 gang Telephone Slave																						
Plate Finish	Sheer Floor Box Satin Steel																						
Insert Colour	Black																						
EAN13 Barcode	5028690061137																						
Dimensions (Nominal)	Single: Height = 93.5mm Width = 85.5mm Depth = 3.0mm (6.5mm Hinged Cover)																						
Weight	215 GR																						
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = N/A																						
Minimum Wall Box Depth	25mm																						
Switched Poles	N/A																						
IP Rating	IP2XD																						
Contact Gap Minimum	N/A																						
Earth Terminal Capacity 1	5 x 1mm <sup>2</sup>																						
Earth Terminal Capacity 2	4 x 1.5mm <sup>2</sup>																						
Earth Terminal Capacity 3	3 x 2.5mm <sup>2</sup>																						
Earth Terminal Capacity 4	1 x 4mm <sup>2</sup> Multi-strand																						
Earth Terminal Capacity 5	1 x 6mm <sup>2</sup>																						
Product Class 1	Must be earthed (ref BS7671 415.2.1)																						
Ambient Operating Temperature	-5° to +40°C																						
Recommended Location	Internal Use Only																						
Maximum Installation Altitude	2000m																						
All products listed conform to current British or European standard and the product information is correct at the time of going to press.	All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.	It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.																					
Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.	Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes.	Correct as at 17 October 2018 11:27 AM E&OE																					

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ  
 T: +44 (0)1747 860088 F: +44 (0)1179 710414  
 E: info@hamilton-litestat.com www.hamilton-litestat.com

Registered Office 1 Rushmills, Bedford Road, Northampton NN4 7YB  
 Registered in London No. 941624 VAT Registration No. 222 6607 84

