

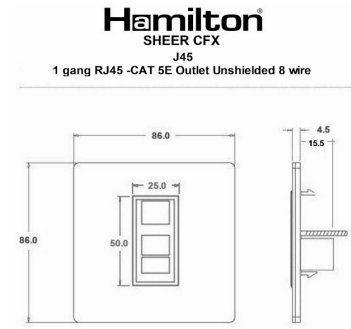


## 8WPCJ45W

### Sheer CFX Primed White 1 gang RJ45 CAT 5E Outlet - Unshielded White

Item Image	Wiring	Dimensions																										
  <p><b>RJ45 CAT5e and CAT6 Wiring Colour Codes</b></p> <table border="1"> <thead> <tr> <th>Pin</th> <th>EIA Wiring Schedule (Colour Codes)</th> <th>ISO Wiring Schedule (Colour Codes)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>WHITE / Green</td> <td>WHITE / Orange</td> </tr> <tr> <td>2</td> <td>GREEN / White</td> <td>ORANGE / White</td> </tr> <tr> <td>3</td> <td>WHITE / Orange</td> <td>WHITE / Green</td> </tr> <tr> <td>4</td> <td>BLUE / White</td> <td>BLUE / White</td> </tr> <tr> <td>5</td> <td>WHITE / Blue</td> <td>WHITE / Blue</td> </tr> <tr> <td>6</td> <td>ORANGE / White</td> <td>GREEN / White</td> </tr> <tr> <td>7</td> <td>WHITE / Brown</td> <td>WHITE / Brown</td> </tr> <tr> <td>8</td> <td>BROWN / White</td> <td>BROWN / White</td> </tr> </tbody> </table> <p><small>Please always check with the colour coding found on the product.</small></p>	Pin	EIA Wiring Schedule (Colour Codes)	ISO Wiring Schedule (Colour Codes)	1	WHITE / Green	WHITE / Orange	2	GREEN / White	ORANGE / White	3	WHITE / Orange	WHITE / Green	4	BLUE / White	BLUE / White	5	WHITE / Blue	WHITE / Blue	6	ORANGE / White	GREEN / White	7	WHITE / Brown	WHITE / Brown	8	BROWN / White	BROWN / White	 <p><b>Hamilton®</b> SHEER CFX J45 1 gang RJ45 -CAT 5E Outlet Unshielded 8 wire</p> <p>Dimensions: 86.0mm (width), 86.0mm (height), 25.0mm (inner width), 4.5mm (depth), 15.5mm (plate thickness).</p>
Pin	EIA Wiring Schedule (Colour Codes)	ISO Wiring Schedule (Colour Codes)																										
1	WHITE / Green	WHITE / Orange																										
2	GREEN / White	ORANGE / White																										
3	WHITE / Orange	WHITE / Green																										
4	BLUE / White	BLUE / White																										
5	WHITE / Blue	WHITE / Blue																										
6	ORANGE / White	GREEN / White																										
7	WHITE / Brown	WHITE / Brown																										
8	BROWN / White	BROWN / White																										
Primary Range	Sheer CFX - Designed to fit Folded Metal Wall Box Enclosures that comply with BS4662-2006.																											
Insert Type	1 gang RJ45 CAT 5E Outlet - Unshielded																											
Plate Finish	Sheer CFX Primed White																											
Insert Colour	White																											
EAN13 Barcode	5017504031206																											
Dimensions (Nominal)	Single: Height = 86.0mm Width = 86.0mm Depth = 1.5mm plate + 3.0mm gasket																											
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = CFX Clips																											
Minimum Wall Box Depth	35mm																											
Switched Poles	N/A																											
IP Rating	IP2XD																											
Contact Gap Minimum	N/A																											
Earth Terminal Capacity 1	5 x 1mm <sup>2</sup>																											
Earth Terminal Capacity 2	4 x 1.5mm <sup>2</sup>																											
Earth Terminal Capacity 3	3 x 2.5mm <sup>2</sup>																											
Earth Terminal Capacity 4	1 x 4mm <sup>2</sup> Multi-strand																											
Earth Terminal Capacity 5	1 x 6mm <sup>2</sup>																											
Product Class 1	Must be earthed (ref BS7671 415.2.1)																											
Ambient Operating Temperature	-5° to +40°C																											
Recommended Location	Internal Use Only																											
Maximum Installation Altitude	2000m																											
EuroFix Additional Notes	Can be used in both EIA 568A and EIA 568B wiring schedules																											
Patents and Trademarks	CFX is a Registered Trade Mark No 2398667 Trade Mark No. 2296586 Sheer CFX is a Registered Design under Reference Nos. R21 = 3020754 SS2 =3020755																											
All products listed conform to current British or European standard and the product information is correct at the time of going to press.	All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.	It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.																										
Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.	Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.	Correct as at 17 October 2018 10:46 AM E&OE																										

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ  
T: +44 (0)1747 860088 F: +44 (0)1179 710414  
E: info@hamilton-litestat.com www.hamilton-litestat.com

Registered Office 1 Rushmills, Bedford Road, Northampton NN4 7YB  
Registered in London No. 941624 VAT Registration No. 222 6607 84



CERT. No. FM11238