


## ELMSPNGY

Elemento Grey IP66 1 gang Enclosure fitted with a 13 Amp Switched Spur with Neon Indicator

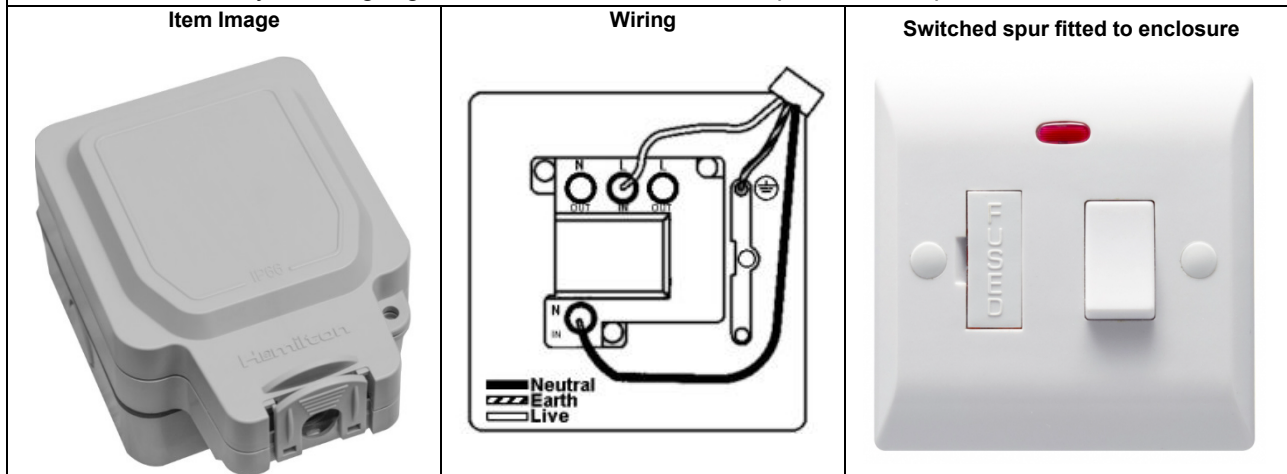

<b>Primary Range</b>	Elemento
<b>Insert Type</b>	Elemento Grey IP66 1 gang Enclosure Fitted with a 13 Amp Switch Spur with Neon
<b>Plate Finish</b>	High Grade Thermoset Plastic
<b>Insert Colour</b>	Grey Enclosure fitted with a white 13 Amp Switched Spur connection unit
<b>EAN13 Barcode</b>	5017503940509
<b>Dimensions (Nominal)</b>	(W) 110mm (H) 153mm (D) 95mm
<b>IP (Ingress Protection) rating</b>	IP66
<b>Fixing Hole Centres</b>	60.3mm
<b>Conduit Drill-Out entry points</b>	4 Conduit entry points for 20mmØ drill out positions
<b>Switched Poles</b>	N/A
<b>Current Rating</b>	13Amp
<b>Voltage</b>	230V - 250V AC
<b>Maximum Load</b>	13Amp
<b>Mains Frequency</b>	N/A
<b>Contact Gap Minimum</b>	N/A
<b>Terminal Capacity 1</b>	3 x 2.5mm <sup>2</sup>
<b>Terminal Capacity 2</b>	2 x 4mm <sup>2</sup> Multi-Stranded
<b>Terminal Capacity 3</b>	1 x 6mm <sup>2</sup>
<b>Terminal Capacity 4</b>	
<b>Earth Terminal Capacity 1</b>	6 x 1mm <sup>2</sup>
<b>Earth Terminal Capacity 2</b>	5 x 1.5mm <sup>2</sup>
<b>Earth Terminal Capacity 3</b>	3 x 2.5mm <sup>2</sup>
<b>Earth Terminal Capacity 4</b>	2 x 4 mm <sup>2</sup> Multi-Stranded
<b>Earth Terminal Capacity 5</b>	1 x 6mm <sup>2</sup>
<b>Product Class 1</b>	Must be earthed
<b>Ambient Operating Temperature</b>	-5° to +40°C
<b>Recommended Location</b>	IP66, suitable for year round outdoor use and installation
<b>Maximum Installation Altitude</b>	2000m
<b>Standard/Approval</b>	BS EN 60529, BS EN 7288 : 1990, BS EN 1363 :1995 & BS EN 60669-1
<b>Additional Notes</b>	Dual Earth: Yes

All products listed conform to current British or European standard and the product information is correct at the time of going to press.	All accessories are manufactured under an accredited. BS EN ISO 9001 : 2015 Quality Management System.	It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.
Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.	Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.	Correct at August 2018

R Hamilton & Co Ltd • Unit 10 Carrick Business Centre • 4-5 Bonville Road • Brislington • Bristol • BS4 5NZ  
 T: +44 (0)1747 860088 • F: +44 (0)1179 418713 • E: info@hamilton-litestat.com  
 www.hamilton-litestat.com

Directors: R Hamilton • I Hamilton • RL Haines • CP Savory  
 J Beny • P McCourt • P Walker • AMH Hamilton (Secretary)  
 Registered Office: I Rushmills • Bedford Road • Northampton • NN4 7YB  
 Registered in London No. 941624 • VAT Registration No. 222 6607 84



ELMSPNGY Elemento Grey IP66 1 gang Enclosure fitted with a 13 Amp Switched Spur with Neon Indicator