
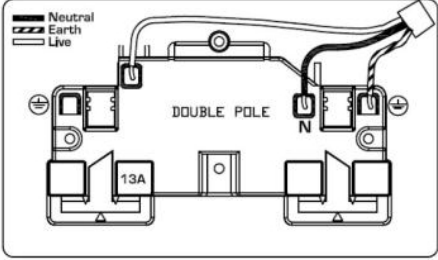


## ELMUS99GY

Elemento Grey IP66 2 gang Enclosure fitted with a Double 13 Amp Un-Switched Socket.

Item Image	Wiring	Dimensions
		

<b>Primary Range</b>	Elemento
<b>Insert Type</b>	2 gang 13A Un-Switched Socket Outlet
<b>Plate Finish</b>	High Grade Thermoset Plastic
<b>Insert Colour</b>	Grey / White Accessory
<b>EAN13 Barcode</b>	501750394054
<b>Dimensions (Nominal)</b>	(W) 170mm (H) 153mm (D) 95mm
<b>Weight</b>	
<b>Fixing Hole Centres</b>	120.6mm
<b>Minimum Wall Box Depth</b>	N/A
<b>Switched Poles</b>	Double Pole
<b>Current Rating</b>	13 Amp
<b>Voltage</b>	220 / 250V AC
<b>Maximum Load</b>	13 Amp
<b>Mains Frequency</b>	
<b>Contact Gap Minimum</b>	3mm
<b>Terminal Capacity 1</b>	4 x 2.5mm <sup>2</sup>
<b>Terminal Capacity 2</b>	3 x 4mm <sup>2</sup>
<b>Terminal Capacity 3</b>	2 x 6mm <sup>2</sup> Multi-stranded
<b>Terminal Capacity 4</b>	1 x 10mm <sup>2</sup>
<b>Earth Terminal Capacity 1</b>	4 x 2.5mm <sup>2</sup>
<b>Earth Terminal Capacity 2</b>	3 x 4mm <sup>2</sup>
<b>Earth Terminal Capacity 3</b>	2 x 6mm <sup>2</sup> Multi-Strand
<b>Earth Terminal Capacity 4</b>	1 x 1mm <sup>2</sup>
<b>Product Class 1</b>	Must be earthed
<b>Ambient Operating Temperature</b>	-5° to +40°C
<b>Recommended Location</b>	Internal Use Only
<b>Maximum Installation Altitude</b>	2000m
<b>Standard/Approval</b>	IP66 & BS1363-2
<b>Additional Notes</b>	Dual Earth: Yes
<b>Patents and Trademarks</b>	

<p>All products listed conform to current British or European standard and the product information is correct at the time of going to press.</p>	<p>All accessories are manufactured under an accredited. BS EN ISO 9001 : 2015 Quality Management System.</p>	<p>It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.</p>
<p>Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.</p>	<p>Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.</p>	<p>Correct at August 2018</p>

R Hamilton & Co Ltd • Unit 10 Carrick Business Centre • 4-5 Bonville Road • Brislington • Bristol • BS4 5NZ  
 T: +44 (0)1747 860088 • F: +44 (0)1179 418713 • E: info@hamilton-litestat.com  
 www.hamilton-litestat.com

Directors: R Hamilton • I Hamilton • RL Haines • CP Savory  
 J Berry • P McCourt • P Walker • AMH Hamilton (Secretary)  
 Registered Office: 1 Rushmills • Bedford Road • Northampton • NN4 7YB  
 Registered in London No. 941624 • VAT Registration No. 222 6607 84

