
## Hamilton

## making connections beautifully

	9		
	Wining Accessories • Circuit Protection • Smart Lighting Con	trol & Multi-room Audio	
	LDUS2PB-PBB		
Linez-Duo CEX Polis	shed Brass Frame/Polished Brass Front 1 gang 2A Unswitched S	locket Black	
	shed blass i fame/ foilshed blass i foilt i gang ZA offswitched o		
Item Image	Wiring	Dimensions	
	Reutral Earth Live	HEDDILOO US2 Unswitched Socket	
Primary Range	Linea-Duo CFX		
Insert Type	1 gang 2A Unswitched Socket	1 gang 2A Unswitched Socket	
Plate Finish	Linea-Duo CFX Polished Brass Frame/Polished Brass		
Insert Colour	Black		
EAN13 Barcode	5017504101046		
Dimensions (Nominal)	Single: Height = 86.0mm Width = 86.0mm Depth = 4.0mm		
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = CFX Clips		
Minimum Wall Box Depth	35mm		
Switched Poles	None		
Current Rating	2 Amp		
Voltage	220/250V AC		
Maximum Load	2 Amp		
Mains Frequency	50Hz		
IP Rating	IP2XD		
Contact Gap Minimum	None		
Terminal Capacity 1	5 x 1mm2		
· · · · · · · · · · · · · · · · · · ·			

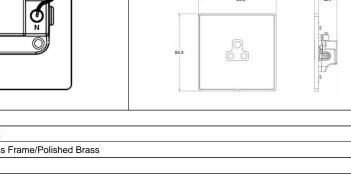

EAN13 Barcode	5017504101046		
Dimensions (Nominal)	Single: Height = 86.0mm Width = 86.0mm Depth = 4.0mm		
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = CFX Clips		
Minimum Wall Box Depth	35mm		
Switched Poles	None		
Current Rating	2 Amp		
Voltage	220/250V AC		
Maximum Load	2 Amp		
Mains Frequency	50Hz		
IP Rating	IP2XD		
Contact Gap Minimum	None		
Terminal Capacity 1	5 x 1mm2		
Terminal Capacity 2	4 x 1.5mm2		
Terminal Capacity 3	2 x 2.5mm2		
Terminal Capacity 4	1 x 4mm2		
Earth Terminal Capacity 1	5 x 1mm2		
Earth Terminal Capacity 2	4 x 1.5mm2		
Earth Terminal Capacity 3	2 x 2.5mm2		
Earth Terminal Capacity 4	1 x 4mm2		
Product Class 1	Must be earthed		
Ambient Operating Temperature	-5° to +40°C		
Recommended Location	Internal Use Only		
Maximum Installation Altitude	2000m		
Standard/Approval	BS 546		
Additional Notes	Shuttered: Yes		
Patents and Trademarks	Linea is a Registered Trade Mark No 2398665 CFX is a Registered Trade Mark No 2398667 Patent No. GB 2383375B Linea-Duo CFX is a UK Registered Design Certificate No: R21 = 3021173 SS2 = 3021174		
All products listed conform to current British or European standard and the product information is correct at the time of going to press.	All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.	It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.	
Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.	Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes.	Correct as at 15 October 2018 08:24 AM E&OE	
R Hamilton & Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville R T: +44 (0)1747 860088 F: +44 (0)179 710414 Registered ( E: info@hamilton-litestat.com www.hamilton-litestat.com Registered in	orad, Brislington, Bristol, BS4 5NZ office 1 Rushmills, Bedford Road, Northampton NN4 7YB a London No. 941624 VAT Registration No. 222 6607 84	Listed in Trimble LUCKINS relector DSSPlus (150) CREL No. 14/11238	

SL

Hamilton

making connections beautifully

Wiring Accessories • Circuit Protection • Smart Lighting Control & Multi-room Audio