
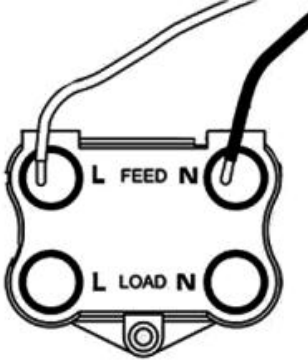


## MC45W

Metalclad 1 gang 45A Double Pole Red Rocker and White surround supplied with 40mm Deep Metal Clad Wall Box. Wall Box includes 5x 20mm knock outs to connect to suitable conduit.

Item Image	Wiring	Dimensions
		
Primary Range	Metal Clad	
Insert Type	Double Pole Rocker Switches	
Plate Finish	Steel	
Insert Colour	N/A	
EAN13 Barcode	501750394027	
Dimensions (Nominal)	Single: Height = 80.0mm Width = 80mm Depth = 40mm	
Weight	120 GR	
Fixing Hole Centres	Box Fixing = 60.3mm Grid Fixing = N/A	
Minimum Wall Box Depth	38mm	
Switched Poles	Double	
Current Rating	45Amp	
Voltage	220 - 250V	
Maximum Load	45 Amp	
Mains Frequency		
IP Rating	IP2XD	
Contact Gap Minimum	3mm	
Terminal Capacity 1	3 x 6mm <sup>2</sup>	
Terminal Capacity 2	2 x 10mm <sup>2</sup>	
Terminal Capacity 3	1 x 16mm <sup>2</sup>	
Terminal Capacity 4		
Terminal Capacity 5		
Earth Terminal Capacity 1	6 x 1mm <sup>2</sup>	
Earth Terminal Capacity 2	5 x 1.5mm <sup>2</sup>	
Earth Terminal Capacity 3	3 x 2.5mm <sup>2</sup>	
Earth Terminal Capacity 4	1 x 4mm <sup>2</sup> Multi-Stranded	
Earth Terminal Capacity 5	1 x 6mm <sup>2</sup>	
Product Class 1	Must be earthed	
Ambient Operating Temperature	-5° to +40°C	
Recommended Location	Internal Use Only	
Maximum Installation Altitude	2000m	
Standard/Approval	BS EN 60669-1	
Additional Notes		
Patents and Trademarks		
All products listed conform to current British or European standard and the product information is correct at the time of going to press.	All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.	It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.
Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.	Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes.	Correct as at August 2018 E&OE