



Connection

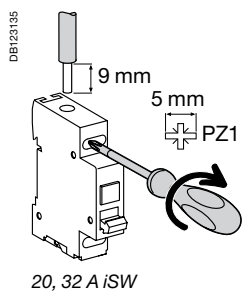


Type	Rating	Tightening torque	Copper cables	
			Rigid	Flexible or ferrule
iSW	20, 32 A	1.2 N.m	10 mm ²	10 mm ²
OF iSW	-	1.2 N.m	10 mm ²	10 mm ²

Dimensions (mm)

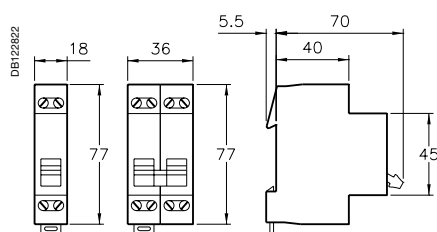

1P, 2P 3P, 4P
20, 32 A iSW

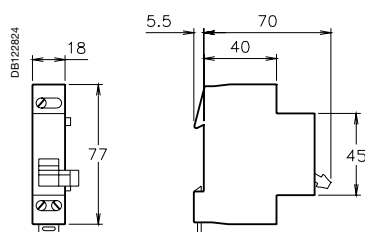

OF iSW