

A range of 18 mm, 1, 2 or 3-row 4, 6, 8, 12, 18, 24 or 36-module ready-to-use enclosures designed for electricians: ergonomic design and flexibility of installation.

Function


This distribution or sub-distribution enclosure, up to 63 A, is designed for installing electrical switchboards in new or renovated installations in the housing sector.

Description

The surface mounting Mini Pragma consists of:

- a back with:
 - a centered slot to facilitate installation
 - fixing holes for vertical adjustment.
 - the necessitate for entry cables:
 - two removable cable entry plates at the top and bottom
 - punch-outs
 - a large area for drilling (crown saw, punches)
 - 1 to 3 DIN rails fixed asymmetrically onto the back
 - a reversible front face, fitted with pre-cutout blanking plates
 - a white opaque or translucent door or smoked transparent
 - an earth terminal block and a neutral terminal block
- Enclosure colour: White RAL 9003.


This enclosure can be equipped with a marker light, available in accessories. It allows locating the enclosure in the dark during a power failure.

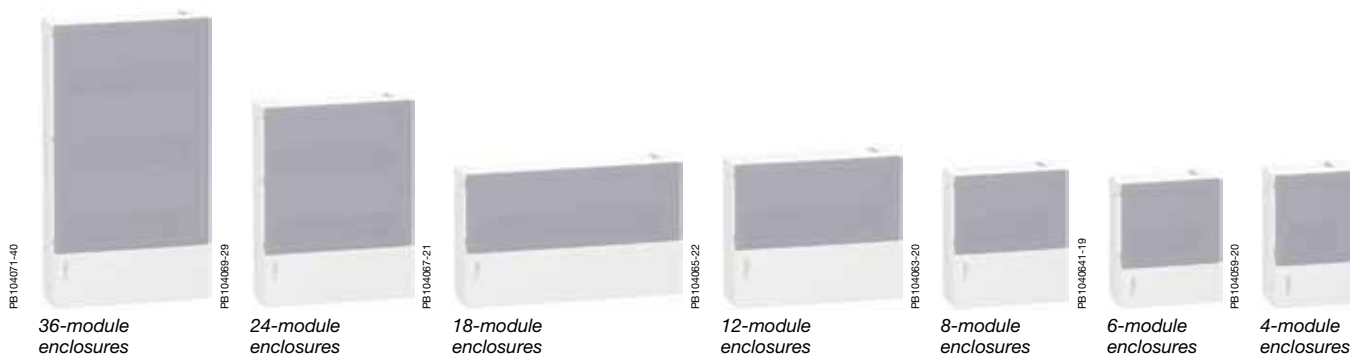

Smoked translucent door.



White door.



Smoked transparent door.

Technical data

Enclosures		
Compliance with standards	IEC 60439-3, IEC 60529, IEC 60695-2-11, EN 50102, IEC 60670-24	
Rated current (In)	4-module enclosure	50 A
	6 to 36-module enclosures	63 A
Rated insulation voltage (Ui)	< 400 V	
Insulation	Class 2 (as per IEC 60439-3)	
Degree of protection	To IEC 60529	IP 40
	Against mechanical impacts	IK 07
Materials	Self-extinguishing technoplastic ⁽¹⁾ : resistant to fire and abnormal heat 650°C to IEC 60695-2-11	

(1) Technoplastic material specially developed by Schneider Electric.