Isobar 4 Electrical auxiliaries for C60

Function


They remotely trip or indicate circuit breakers, with or without Vigi module.

Description

- They are mounted to the left of the circuit-breaker within a maximum width of 54mm
- Fixed using clips (no tools) onto the left side of the circuit breaker

Auxiliary combination

- A maximum of 3 indication auxiliaries OF, SD on the same circuit breaker
- A maximum of 2 changeover auxiliaries (OF+SD/OF) on the same circuit breaker
 A maximum of 1 OF+SD/OF switchover auxiliary and 1 indication auxiliary OF
- or SD on the same circuit breaker A maximum of 2 tripping auxiliaries (MX+OF, MX, MN, MNs, MNx) on the same
- circuit breaker A maximum of 3 tripping auxiliaries MSU on the same circuit breaker without
- A maximum of 3 tripping auxiliaries MSU on the same circuit breaker without other auxiliary

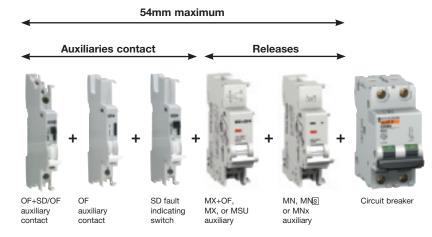

| Technical | Dimensions |
|-----------|------------|
| Section 9 | Section 10 |