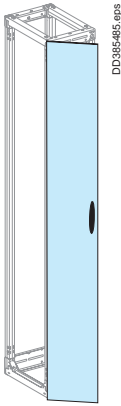
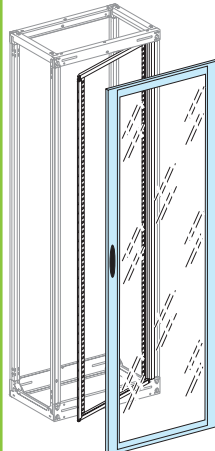
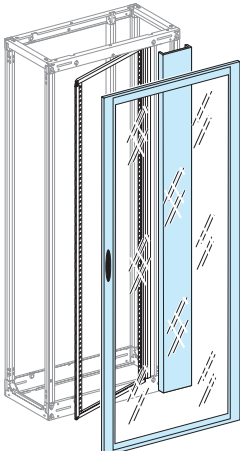




Cubicles

IP30/31 cover panels

Mounting	Front panels			
				
Dimensions (mm)	W = 300	W = 400	W = 650	W = 800
Plain door	08513	08514	08516	08518
Transparent door	-	08534	08536	08538
Door with cut-out	08593	08594	-	-
Reinforced door	-	-	01224	01225
Characteristics	<ul style="list-style-type: none"> ■ Reversible for left or right-hand opening. ■ Equipped with a handle and keylock (key 405). For other possibilities, see page C-21. <i>Note: the door with cut-out can be equipped with front plates for 72 x 72 or 96 x 96 instruments, see page A-71.</i> <i>The 800 mm door is supplied with a 150 mm barrier for the side compartment, plus a finishing accessory to improve the appearance of the upright.</i>			
Cover frame	-	08574	08576	08578 ⁽¹⁾

(1) For 800 mm wide frameworks, the 650 mm frame is supplied with a plain wicket door, 150 mm wide.

Mounting	Rear panels			
				
Dimensions (mm)	W = 300	W = 400	W = 650	W = 800
Rear panel	08733	08734	08736	08738
Characteristics	<ul style="list-style-type: none"> ■ Made up of two half panels with vents. ■ Supplied with quarter-turn fasteners. 			
Plain door	08513	08514	08516	08518
Characteristics	<ul style="list-style-type: none"> ■ Equipped with a handle and keylock (key 405). For other possibilities, see page C-21. <ul style="list-style-type: none"> ■ Reversible for left or right-hand opening. ■ In the case of a door mounted at the rear of cubicle, it is necessary to follow the temperature derating values for installed devices in all cubicles with cover panels rated IP55. <i>Note: the 800 mm door is supplied with a 150 mm barrier for the side compartment, plus a finishing accessory to improve the appearance of the upright.</i>			