

# Telephone, USB & data outlets

## USB charger outlet



GGBL70042BSSS

Product code	Description	Pack qty
GGBL70042***S	1gang 2xUSB – 3.1A total (Display packaged)	1

- **Charging capacity** : 5 VDC - 3.1 A, compatible with USB 2.0 devices
- **Smart chip recognizes and optimizes the charging requirements of individual devices**
- **Electronically protected against over voltages and short circuits on either USB outlet (CAT3)**
- **Energy efficient, stand-by power limitation** : 0.5 W (comply with ErP Directive)

- **Standard of compliance:**  
BS EN 60950-1 / WEEE : EU-directive 2002/95/EC, WEEE directive 2002/96/EC.
- **Mounting box:**  
35mm deep
- **Fixing screws:**  
M3.5 x 25mm
- **Plate dimensions:**  
87 x 87mm

## Telephone



GGBL7061BSS

Product code	Description	Pack qty
GGBL7051***S	RJ12 (Display packaged)	1
GGBL7061***	BT Master – single	1
GGBL7061***S	BT Master – single (Display packaged)	7
GGBL7062***	BT Secondary – single	1
GGBL7062***S	BT Secondary – single (Display packaged)	7

- **Standard of compliance:**  
BS EN 41003
- **Mounting box:**  
25mm deep
- **Fixing screws:**  
M3.5 x 18mm
- **Plate dimensions:**  
87 x 87mm

## RJ45 CAT5e UTP



GGBL7071C5BSS

Product code	Description	Pack qty
GGBL7071C5***S	RJ45 Cat 5e - single (Display packaged)	1
GGBL7072C5***S	RJ45 Cat 5e -twin (Display packaged)	1


- **Standard of compliance:**  
ANSI/TIA-568-C.2
- **Mounting box:**  
25mm deep
- **Fixing screws:**  
M3.5 x 18mm
- **Plate dimensions:**  
87 x 87mm

## RJ45 CAT6 UTP



GGBL7072C6BSSS

Product code	Description	Pack qty
GGBL7071C6***S	RJ45 Cat 6 - single (Display packaged)	1
GGBL7072C6***S	RJ45 Cat 6 – twin (Display packaged)	1

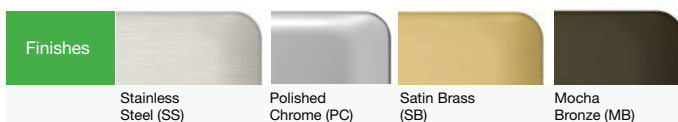

\*\*\* = Code for finish option:  
B or W for interior colour,  
followed by SS, PC, MB,  
SB, PB, PW or LC.