

Sockets




SRS1-0, SRS2-0

Key Features:

- Suitable for SRRHN, SRRNS, SRRT, SRP, ERR & ERP Relays
- Dielectric strength 5000VAC
- PCB mounting
- Components available: metallic retainer
- 1 Pole: SRS1, 2 Pole: SRS2



Outline dimensions (mm) Wiring diagram

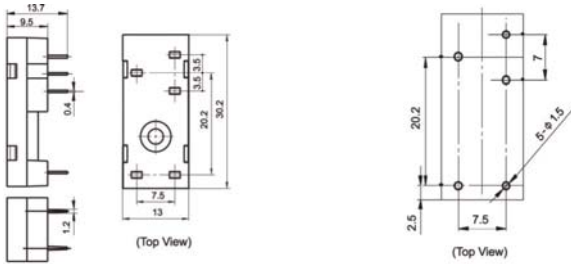


SRS3-0, SRS4-0, SRS5-0

Key Features:

- Suitable for EJH, EJHP relays
- Dielectric strength 5000VAC
- PCB mounting
- Components available: metallic retainer



Outline dimensions (mm) Wiring diagram

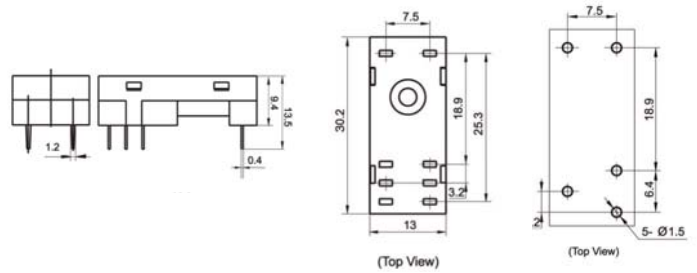


SRN3-S

Key Features:

- Suitable for 1 pole SRRHN, SRRNS, ERR Relays
- Dielectric strength 5000VAC
- DIN Rail mounting
- Components available: plastic retainer, Plug-in module & marker



Outline dimensions (mm) Wiring diagram

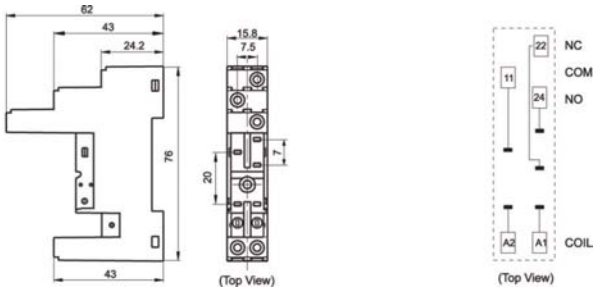


SRN3-T

Key Features:

- Suitable for 1 pole SRRHN relays
- Dielectric strength 5000 VAC
- DIN Rail mounting
- Components available: plastic retainer, plug-in module & marker




Outline dimensions (mm) Wiring diagram

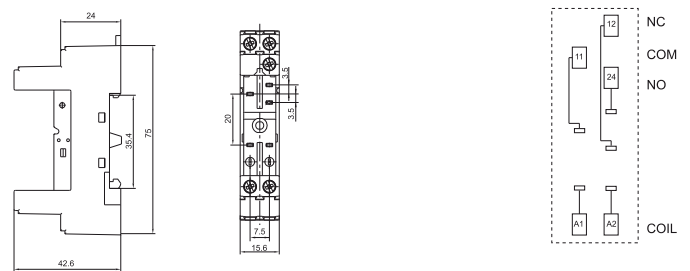


SRN5-S

Key Features:

- Suitable for 1 & 2 pole SRRHN, SRP, SRRNS, ERR relays
- Dielectric strength 5000 VAC
- DIN Rail mounting
- Components available: plastic retainer, plug-in module & marker



Outline dimensions (mm) Wiring diagram

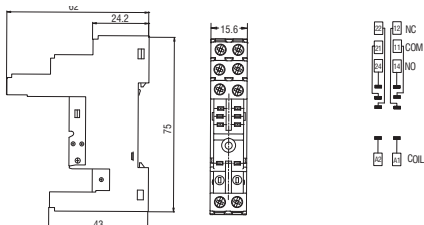

SRP2-0

Key Features:

- Suitable for QY relays
- Dielectric strength 2000 VAC
- PCB mounting
- Components available: metallic retainer



Outline dimensions (mm) Wiring diagram

