


Mulu

Standard/Self-test
IP65 LED emergency exit sign bulkhead

Battery warranty

4
YEAR

- All legends included
- Maintained and non-maintained option
- 20mm Conduit entry
- IP65 and IK10 (vandal resistant) for internal & external uses.
- Dual entry push-wire terminal block for easy loop-in loop-out wiring
- Available in self-test version
- BESA box fitting points

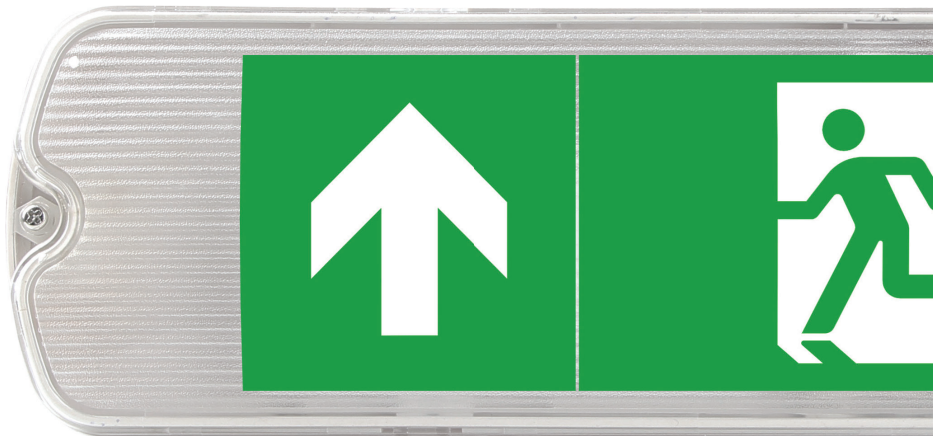

LED Indicator (Self-test version)

● Green	System Healthy	● Red	Battery Charging Fault
⬆ Green Flash 1 per second	Duration Test Pending	⬆ Red Flash 2 per second	Battery Duration Fault
⬆ Green Flash 2 per second	Duration Test Running	⬆ Red Flash 4 per second	Lamp or Luminaire Fault
⬆ Green Flash 4 per second	Functional Test Running		

Standard
EmergencySelf-test
Emergency

Standard (All exit legends included)

Order Code	Input Power (max)	Emergency Output Power	CCT	Lumen	Trade Price
EESN0105S65	5W	1W	6500K	70lm	£52.99
EESN0105S65-BLK	5W	1W	6500K	40lm	£53.06

Self-test (All exit legends included)

Order Code	Input Power (max)	Emergency Output Power	CCT	Lumen	Trade Price
EESN0105S65/S	5W	1W	6500K	70lm (Emergency) 200lm (Lighting)	£69.48
EESN0105S65/S-BLK	5W	1W	6500K	50lm (Emergency) 130lm (Lighting)	£67.09

Batteries

Order Code	Type	Capacity	Voltage	Trade Price
KBAT1500NC9 (for standard)	Nickel Cadmium	1500mAh	3.6V	£14.08
KBAT2600LI1 (for self-test)	Li-ion	2600mAh	3.7V	£48.09

3 3 Years
Standard Warranty5 5 Years
Extended Warranty1000V
Surge Protection

Black finish



You Tube

Unboxing of Mulu
- Scan QR code
to watch videoGeneral
Specification

Input	220-240Vac
Voltage	50-60Hz
Input Current (max)	46mA
Life Time	40,000h
Emergency Conversion Time	1s
Emergency Operation Time	3h
Charging Time	12h
Battery Life	4 Years
Ambient Temp	-10°C to 40°C
Maximum Case Temp	75°C

P55
Spacing table

Order Code

EESN0105S65
EESN0105S65-BLK
EESN0105S65/S
EESN0105S65/S-BLK

Dimensions

