


5 5 Years
Standard Warranty

7 7 Years
Extended Warranty



General Specification


Voltage	48Vdc
CRI	> 80
Life Time	40,000h
Power Factor	1.00
Ambient Temp	-20°C to 40°C
Housing	Aluminium
Diffuser	Polycarbonate



Order Code

KTGL13LS-W40-WHT
KTGL26LS-W40-WHT


Dimensions



Isar

T-bar linkable linear luminaire

- Easy clip-on installation on T-bar
- Length of 600mm and 1200mm to fit standard suspended ceiling
- Linkable to create desired arrangement
- Choices of constant voltage drivers upto 120W

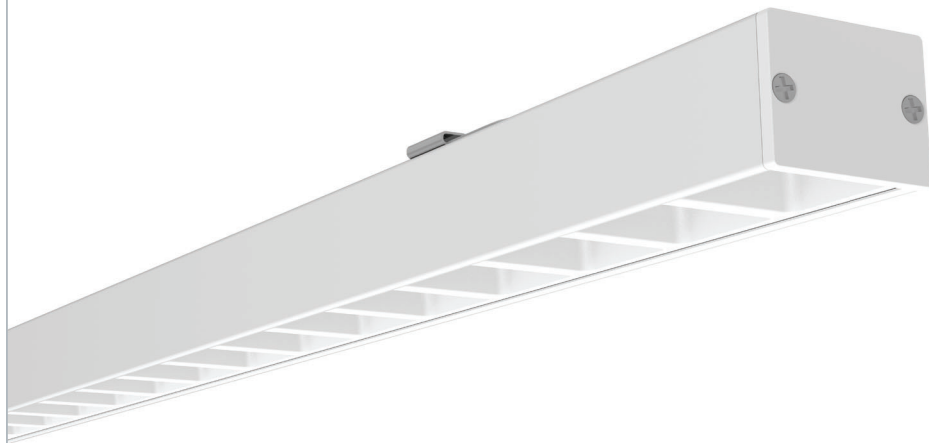

Must be ordered with a power supply

Order Code	Power	Length	Beam Angle	CCT	Lumen	Trade Price
KTGL13LS	13W	600mm(2ft)	80°	4000K	1560lm	£65.88
KTGL26LS	26W	1200mm(4ft)	80°	4000K	3120lm	£125.54

Power Supply

Order Code	Type	Max Power	Output Voltage	Input Voltage	Trade Price
DR-CV-30-48	Standard	30W	48Vdc	180-240Vac 50-60Hz	£61.62
DR-CV-60-48	Standard	60W	48Vdc	180-240Vac 50-60Hz	£83.93
DR-CV-90-48	Standard	90W	48Vdc	180-240Vac 50-60Hz	£168.02
DR-CV-120-48	Standard	120W	48Vdc	180-240Vac 50-60Hz	£204.43
HLG-40H-48AB	1-10V	40W	48Vdc	180-240Vac 50-60Hz	£182.51
HLG-60H-48AB	1-10V	60W	48Vdc	180-240Vac 50-60Hz	£190.10
HLG-80H-48AB	1-10V	80W	48Vdc	180-240Vac 50-60Hz	£223.32
HLG-100H-48AB	1-10V	100W	48Vdc	180-240Vac 50-60Hz	£268.14
HLG-120H-48AB	1-10V	120W	48Vdc	180-240Vac 50-60Hz	£278.55