


Rhine

LED flood light

- Diecast aluminium body
- Surge protection
- Slim profile
- 1m of H05RN-F 3 x 1mm² cable

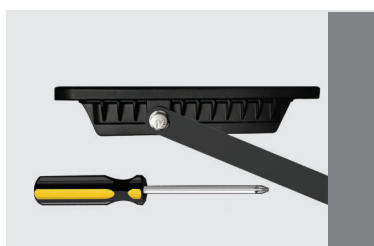

Angled bracket for easy installation

Order Code	Power	Beam Angle	Finish	CCT	Lumen	Trade Price
KFLDHS10Q465	10W	110°	Black	3000K 4000K 6500K	650lm 750lm 750lm	£17.94
KFLDHS20Q465	20W	110°	Black	3000K 4000K 6500K	1400lm 1500lm 1500lm	£29.55
KFLDHS30Q465	30W	110°	Black	3000K 4000K 6500K	2150lm 2250lm 2250lm	£32.30
KFLDHS50Q465	50W	110°	Black	3000K 4000K 6500K	3900lm 4000lm 4000lm	£49.46

Accessory

Type	Order Code	Description	Trade Price
Connector	KCWP3IN	IP67 In-line Connector	£10.97

- 3** 3 Years Standard Warranty
- 1000V** (10W,20W) Surge Protection (L to GND)
- 2000V** (30W,50W) Surge Protection (L to GND)



General Specification

Voltage	220-240Vac 50-60Hz
CRI	>80
Life Time	30,000h
Power Factor	>0.90
Ambient Temp	-20°C to 40°C
Housing	Diecast aluminum



Order Code

- KFLDHS10Q465-W30-BLK
- KFLDHS10Q465-W40-BLK
- KFLDHS10Q465-W65-BLK
- KFLDHS20Q465-W30-BLK
- KFLDHS20Q465-W40-BLK
- KFLDHS20Q465-W65-BLK
- KFLDHS30Q465-W30-BLK
- KFLDHS30Q465-W40-BLK
- KFLDHS30Q465-W65-BLK
- KFLDHS50Q465-W30-BLK
- KFLDHS50Q465-W40-BLK
- KFLDHS50Q465-W65-BLK

Dimensions

