
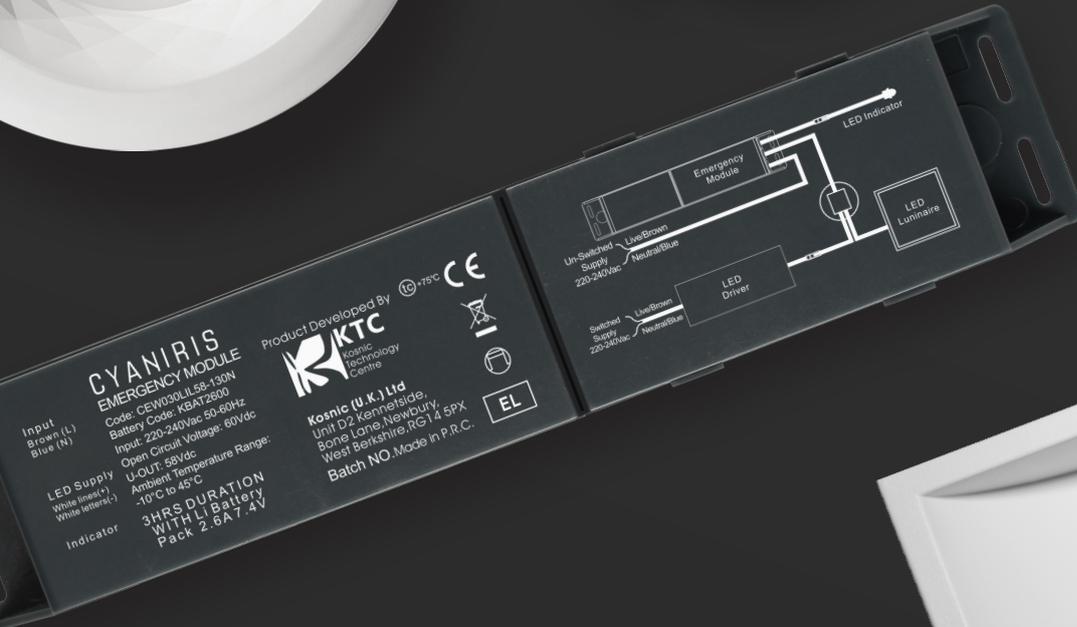


Universal Emergency Module

For LED Luminaires with External Drivers

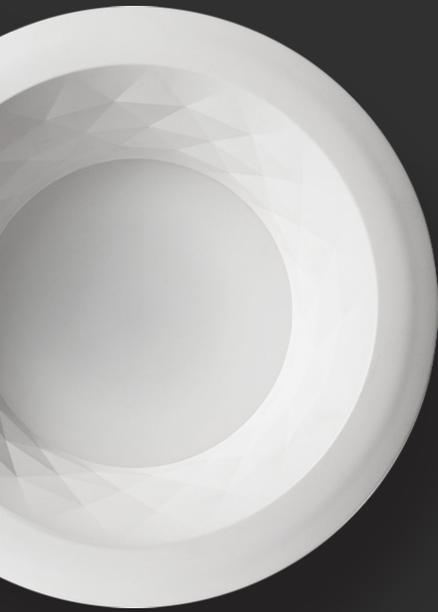

Information

Kosnic's Universal Emergency Module (UEM) is suitable for ALL LED luminaires (Class III) with a separate external LED driver, regardless of their manufacturer. Both innovative and unique, it's the ONLY universal emergency module of its kind that uses Adaptive Current Control (ACC) - developed at the Kosnic Technology Centre (KTC).

With ACC, the UEM's built-in LED driver finds the forward voltage of the LED module and automatically adjusts the output current to provide a predefined "constant wattage", around 3W. This ensures the discharge time remains constant regardless of the choice of LED luminaire, delivering the required 3 hours of light when operated in emergency mode as stated by BS 5266. This product has a granted patent (Instant Emergency Conversion, GB 2 503 708) and pending patent on the ACC technology.

4 Years
Standard Warranty

7 Years
Extended Warranty
Exclude Batteries

Patented
GB 2 503 708

Included



Universal
Emergency
Module



Connection
Lead




Three-way
Connector



Green LED
Indicator





Recessed Holder
for LED Indicator



Specifications

Features

- Compatible with LED luminaires with separate DC LED drivers.
- For maintained or non-maintained emergency lighting systems.
- Conforms to EN 61347-1 and EN 61347-2-7.
- Suitable for use in luminaires for high-risk task area lighting.
- Voltage change-over threshold according to EN 60598-2-22.
- 3 hours rated duration.
- Internal Li-ion battery for improved lifespan allowing frequent partial discharge without capacity reduction.
- Over-charge, over-current, short-circuit and deep discharge protection for battery.
- Green charging status LED.

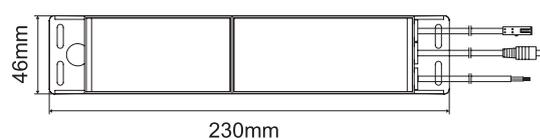

Output Wattage	2.3-3.3W
Output Current	50-130mA
Output Voltage	9-58Vdc
Input Voltage	220-240Vac
	50-60Hz
Input Current (max)	35mA
Emergency Conversion Time	1s
Emergency Operation Time	>3h
Battery	Samsung Li-ion KBAT2600

Battery Capacity	2600mAh
Discharge Current (Max)	600-700mA
Charging Time	12h
Battery Life	4 Years
Protection	IP20, Class II
	Independent Driver
Test Function	Manual
Order Code	CEW030LIL58-130N


Installation

Plug & Play

Our Universal Emergency Module is designed to plug-in to any existing LED luminaires that have a separate external driver.

DC jack connections are often found on LED panels and downlights.

For LED Luminaires with a DC jack: A Three-way Connector is provided for easy installation.

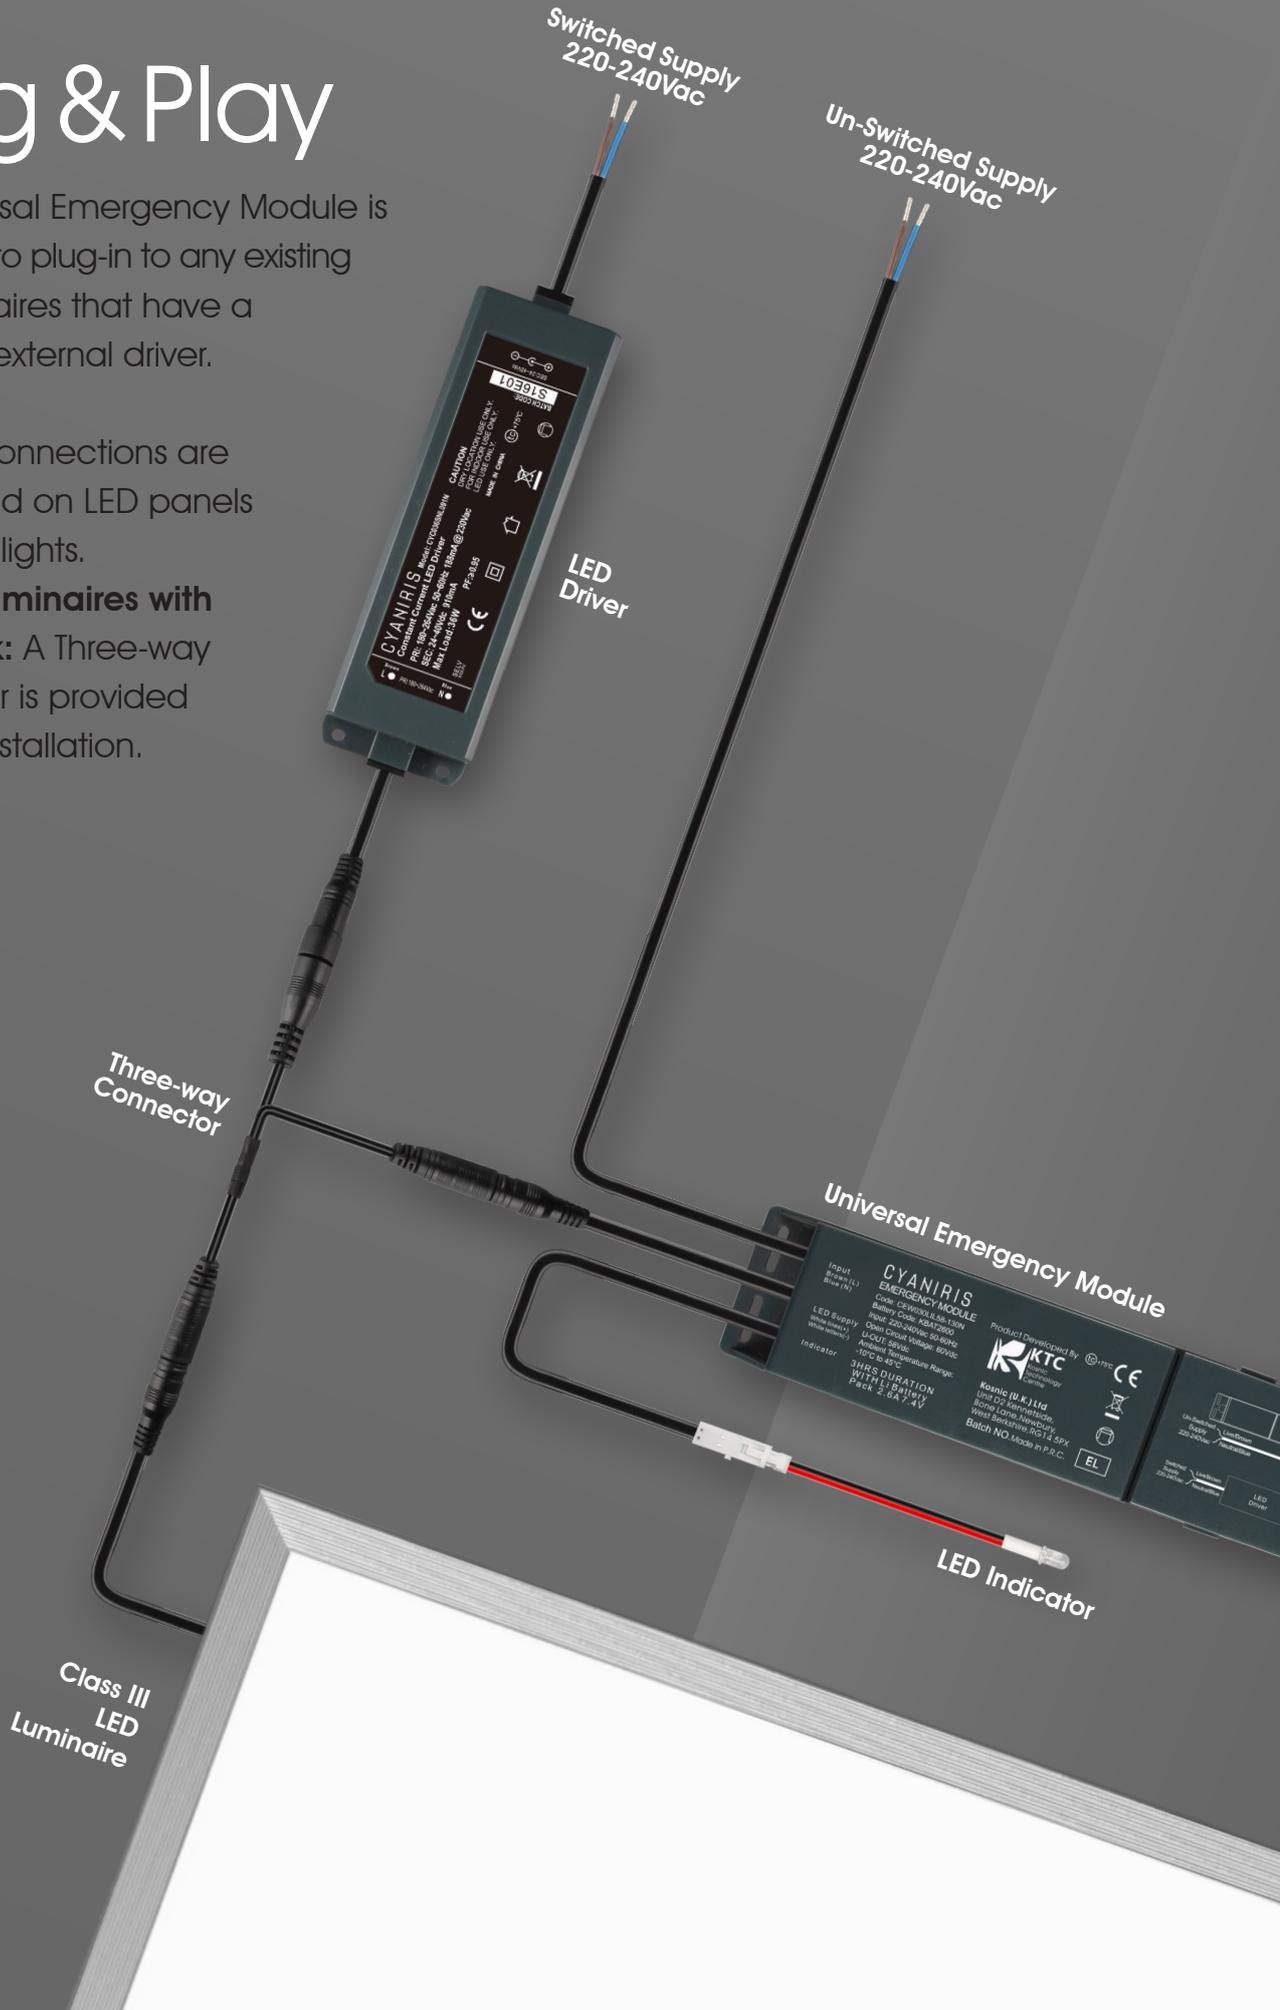

Kosnic

Kosnic Lighting Ltd.
Unit D2 Kennetside, Bone Lane
Newbury, Berkshire, UK
RG14 5PX

Tel: 0845 8386851 sales@kosnic.com
Fax: 0845 8386852 www.kosnic.com



ACCREDITED
SUPPLIER

RELUXX
official member