


# Amenity




Decorative Ceiling/Wall

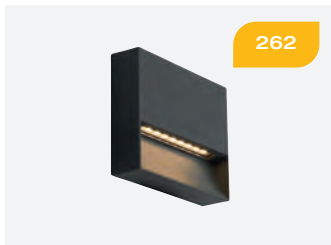

Architectural Die-Cast Wall



Directional Wall



Decorative Ceiling/Wall




Polycarbonate  
Ceiling / Wall




Bulkheads




Recessed Wall

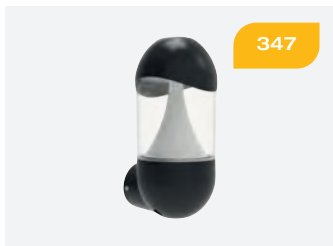

Lanterns and  
Half Lanterns



Bollards



Feature Landscape  
Illumination




Inground Uplights  
and Controllers

# Reef CCT Fixed Surface Downlight



- Durable indoor/outdoor surface mounted downlight suitable for residential and hospitality applications
- Choice of matt white or black finishes
- Polycarbonate construction ideal for coastal applications
- CCT selectable between 3000K, 4000K and 6000K
- Unique lockable installation base plate with push fit loop-in loop-out terminals for ease of installation
- Non-dimmable



Black



White

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50Hz	-20°C to 40°C	L80 54,000	Ra 80	6	90°	2	IP65


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AREELED	CCT Selectable - Black	5W	3000/4000/6000K	486lm (4000K)	97lm (4000K)	£42.75
AREELED/WH	CCT Selectable - White					£42.75

# Reef CCT

## Adjustable Surface Downlight



- Durable indoor/outdoor surface mounted downlight suitable for residential and hospitality applications
- Choice of matt white or black finishes
- Polycarbonate construction ideal for coastal applications
- CCT selectable between 3000K, 4000K and 6000K
- Unique lockable installation base plate with push fit loop-in loop-out terminals for ease of installation
- Non-dimmable

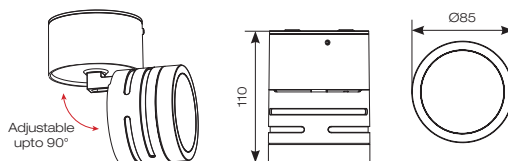

Black



White


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50Hz	-20°C to 40°C	L80 54,000	Ra 80	6	90°	2	IP65

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AREELED/BL	CCT Selectable - Black	5W	3000/4000/6000K	486lm (4000K)	97lm (4000K)	£52.00
AREELED	CCT Selectable - White					£52.00

# Furia



- Shallow die-cast surface downlight suitable for commercial, hospitality and retail applications
- Modern aesthetic appearance
- 35° beam angle
- Triac dimmable as standard



Graphite



White




OCTO  
Compatible

Powered by  
CASAMBI

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50/60Hz	-20°C to 40°C	L70 50,000	Ra 80	3	35°	1	IP55

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AFULED/W	Warm White - White	10W	3000K	719lm	74lm	£104.00
AFULED/GR	Warm White - Graphite					£104.00


*good things  
take time*



# Callisto Wall/Ceiling



- Modern surface mounted ultra-slim wall/ceiling light suitable for residential and hospitality applications
- Die-cast aluminium construction with choice of white or graphite paint finish
- Anti-corrosion paint finish with a 20 Year guarantee
- Tamper-proof stainless steel allen key screws
- Non-dimmable



Graphite



White


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-40°C to 55°C	L70 50,000	Ra 80	6	65°	2	IP65	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ACLED/W	Warm White - White	4W	3000K	181lm	45lm	£86.50
ACLED/GR	Warm White - Graphite					£86.50

## Pi CCT Wall/Ceiling



- Modern surface mounted ultra-slim wall/ceiling light suitable for residential and hospitality applications
- Die-cast aluminium construction with choice of white or graphite paint finish
- Push fit loop-in loop-out terminals for ease of installation
- Anti-glare toughened tempered opal glass front diffuser
- CCT selectable between 3000K and 4000K
- Screwless front cover with concealed allen key access provides security and a sleek design
- Non-dimmable

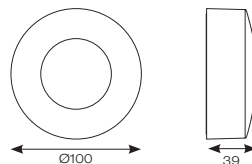

Graphite



White

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	0°C to 25°C	L80 60,000	Ra 80	3	115°	1	IP65	IK06


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
APIWCLED/W	CCT Selectable - White	2.5W	3000/4000K	150lm (4000K)	63lm (4000K)	£49.90
APIWCLED/GR	CCT Selectable - Graphite					£49.90



# Callisto Low Level



- Modern surface mounted ultra-slim low level light suitable for residential and hospitality applications
- Die-cast aluminium construction with choice of white or graphite paint finish
- Anti-corrosion paint finish with a 20 Year guarantee
- Tamper-proof stainless steel allen key screws
- Non-dimmable



Graphite



White


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-40°C to 80°C	L70 50,000	Ra 80	6	50°	2	IP65	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ACLPWLED/W	Warm White - White	4W	3000K	121lm	31lm	£86.50
ACLPWLED/GR	Warm White - Graphite					£86.50

# Pi CCT Low Level



- Modern surface mounted ultra-slim low level light with downward light spill suitable for residential and hospitality applications
- Die-cast aluminium construction with choice of white or graphite paint finish
- Push fit loop-in loop-out terminals for ease of installation
- Anti-glare toughened tempered opal glass front diffuser
- CCT selectable between 3000K and 4000K
- Screwless front cover with concealed allen key access provides security and a sleek design
- Non-dimmable

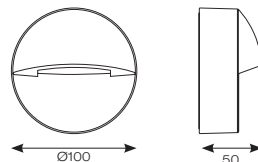

Graphite



White


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	0°C to 25°C	L80 60,000	Ra 80	3	20/60°	1	IP65	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
APILLED/W	CCT Selectable - White	2.5W	3000/4000K	60lm (4000K)	25lm (4000K)	£49.90
APILLED/GR	CCT Selectable - Graphite					£49.90

# Galia Mini and Maxi




- Surface mounting ultra-slim low level square pathway light with downward light suitable for residential, hospitality and commercial applications
- Die-cast aluminium construction with textured graphite paint finish
- Two sizes available; Mini and Maxi
- Push-fit loop-in, loop-out terminals for ease and speed of installation
- Selectable CCT between 3000K and 4000K
- Modern concrete and rust cover options available
- Non-dimmable

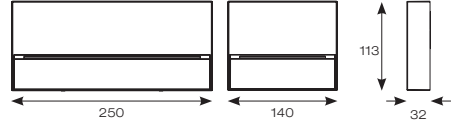

Mini



Galia Mini fitted with Rust cover option

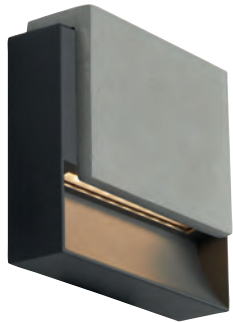

Galia Mini fitted with Concrete cover option



Maxi


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20°C to 40°C	L70 B50 59,000	Ra 80	6	20°/100°	1	IP65	IK09

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AGALIA/MINI	Mini - CCT Selectable					£83.50
AGALIA/MINI/CONC	Mini - CCT Selectable - Concrete	4W		117lm (4000K)	15lm (4000K)	£110.00
AGALIA/MINI/RUST	Mini - CCT Selectable - Rust		3000K/4000K			£104.00
AGALIA/MAXI	Maxi - CCT Selectable					£123.00
AGALIA/MAXI/CONC	Maxi - CCT Selectable - Concrete	8W		220lm (4000K)	27lm (4000K)	£178.00
AGALIA/MAXI/RUST	Maxi - CCT Selectable - Rust					£170.00

# Matala CCT



- Surface mounting ultra-slim low level circular pathway light with downward light-spill suitable for residential and hospitality applications
- Die-cast aluminium construction with graphite paint finish
- Screwless front cover with concealed allen key access
- Selectable CCT between 3000K and 4000K
- Pre-wired with 1 metre of rubber insulated cable for ease of installation
- Non-dimmable




INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-20°C to 25°C	L70 50,000	Ra 80	5	85°	1	IP65	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AMATROLED	CCT Selectable	7W	3000K/4000K	258lm (4000K)	37lm (4000K)	£147.00

# Kappa



- Compact wall light with integral driver suitable for residential and hospitality applications
- Downward light spill ideal for pathway illumination
- Die-cast aluminium construction
- Non-dimmable



Black



Silver Grey


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50/60Hz	0°C to 25°C	L80 60,000	Ra 70	6	90°	1	IP65

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AKLED/B	Cool White - Black	4.5W	4000K	270lm	60lm	£97.00
AKLED/SG	Cool White - Silver Grey					£97.00
AKLED/B/WW	Warm White - Black		3000K	117lm	26lm	£97.00
AKLED/SG/WW	Warm White - Silver Grey					£97.00

# Senza



- Contemporary die-cast aluminium LED wall light suitable for residential and hospitality applications
- Standard and PIR options
- Graphite textured powder coat paint finish
- Available in 3000K and 4000K options
- Non-dimmable



Matching Senza LED Bollard see p363

### PIR



6 to 9 metres  
5 seconds to 8 minutes  
10 to 2000 LUX



PIR

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20°C to 45°C	L70 36,000	Ra 80	6	80/140°	1	IP54	IK07


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ASELED/WL	Cool White	6.5W	4000K	366lm	52lm	£94.50
ASELED/WL/PIR	PIR - Cool White	6W	3000K	410lm	68lm	£116.00
ASELED/WL/WW	Warm White	6W	3000K	410lm	68lm	£94.50
ASELED/WL/PIR/WW	PIR - Warm White	6W	3000K	410lm	68lm	£116.00



# Arco




- Ultra modern LED wall light suitable for residential and hospitality applications
- Graphite textured powder coat paint finish
- Available in 3000K and 4000K options
- Non-dimmable



Matching Senza LED Bollard see p364



Light Distribution





INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20°C to 45°C	L70 36,000	Ra 80	6	60/90°	1	IP54	IK07

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AARLED/WL	Cool White	11W	4000K	643lm	58lm	£98.00
AARLED/WL/WW	Warm White	11W	3000K	468lm	46lm	£98.00

# Tempo



- Contemporary die-cast aluminium LED wall light suitable for residential and hospitality applications
- Adjustable head to 90° for variable direction of light
- Standard and PIR options
- Graphite textured powder coat paint finish
- Available in 3000K and 4000K options
- Non-dimmable

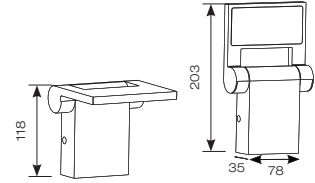

90° adjustable head



6 to 10 metres  
8 seconds to 8 minutes  
5 to 200 LUX



PIR

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20°C to 45°C	L70 36,000	Ra 80	6	110°	1	IP54	IK07

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ATLED/WL	Cool White	10W	4000K	738lm	73lm	£96.00
ATLED/WL/PIR	PIR - Cool White	10W	4000K	738lm	73lm	£117.50
ATLED/WL/WW	Warm White	10W	3000K	685lm	64lm	£96.00
ATLED/WL/PIR/WW	PIR - Warm White	10W	3000K	685lm	64lm	£117.50








# Talana Solar



- Ultra modern die-cast solar powered aluminium LED wall light suitable for semi-commercial and residential applications
- PIR motion sensor as standard
- 2 operation modes:-
  - 1) 11% output after sunset, motion detected 100% output, no motion 11% for 20 hours
  - 2) Motion detected 100% output, no motion off
- Graphite textured powder coat paint finish



Matching  
Talana LED Bollard  
see p360



Light Distribution



**PIR**  
  
 6 to 10 metres  
 1 minute  
 10 to 45 LUX

TEMP	LIFETIME (HRS)	CRI	SDCM	CLASS	IP	IK
-20°C to 45°C	L70 36,000	Ra 80	6	3	IP54	IK07


CODE	DESCRIPTION	CCT	LUMENS	TRADE
ATASLED/WL	Cool White	4000K	210lm	£126.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ASBP/17	7.4V 1500mAh Replacement LI-ION Battery	£24.45

# Tridon CCT



- IP66 rated die-cast aluminium wall light with opal polycarbonate diffuser suitable for commercial, hospitality and industrial applications
- Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K at the point of installation
- Rear fixing points allowing the option for BESA box mounting
- Horizontal side pilot holes accepting 20mm surface conduit entries
- Tamper-proof stainless steel allen key screws
- Microwave sensor and Photocell options available
- Non-dimmable
- Powered by Tridonic



Black



Graphite

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220-240V	50/60Hz	-20°C to 25°C	L70 60,000	Ra 80	5	120°	1	IP66	IK09

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ATRILED/B	CCT Selectable - Black	8W	3000/4000K	701lm(4000K)	88lm(4000K)	£107.00
ATRILED/G	CCT Selectable - Graphite					£107.00


CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/PC	Electronic Photocell	+ £38.50	/MWS	Integral Microwave Sensor	+ £51.50



# Lucca CCT



- IP66 rated die-cast aluminium wall light with opal polycarbonate diffuser suitable for education, commercial and industrial applications
- Tamper-proof stainless steel allen key screws
- One product with integral switches for multi-wattage and selectable CCT options
- Non-dimmable
- Powered by Tridonic

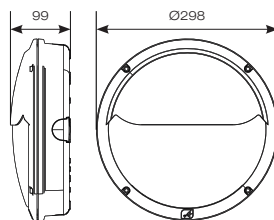

Black



Removable 20mm conduit entry cover for ease of installation



Graphite

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220-240V	50/60Hz	-20°C to 25°C	L70 60,000	Ra 80	5	120°	1	IP66	IK08


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ALUCLED/B	CCT Selectable - Black	18/27W	3000/4000K	1278/1947lm (4000K, 18/27W)	69/71lm (4000K, 18/27W)	£110.00
ALUCLED/G	CCT Selectable - Graphite					£110.00

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £96.50	/PC	Electronic Photocell	+ £38.50
/SM3	Self-Test Emergency	+ £129.50	/MWS	Integral Microwave Sensor	+ £51.50
/DM3	DALI Emergency	+ £219.50	/CF	Corridor Function	+ £39.50

# Nappa CCT



- IP66 rated die-cast aluminium wall light with opal polycarbonate diffuser suitable for education, commercial and industrial applications
- Tamper-proof stainless steel allen key screws
- One product with integral switches for multi-wattage and selectable CCT options
- Non-dimmable
- Powered by Tridonic

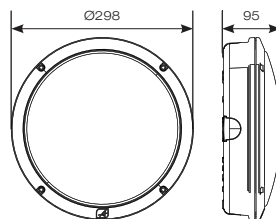

Black



Removable 20mm conduit entry cover for ease of installation



Graphite

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220-240V	50/60Hz	-20°C to 25°C	L70 60,000	Ra 80	5	110°	1	IP66	IK08


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ANAPLED/B	CCT Selectable - Black	18/27W	3000/4000K	2477/3537lm(4000K, 18/27W)	134/127lm(4000K, 18/27W)	£111.00
ANAPLED/G	CCT Selectable - Graphite					£111.00

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £96.50	/PC	Electronic Photocell	+ £38.50
/SM3	Self-Test Emergency	+ £129.50	/MWS	Integral Microwave Sensor	+ £51.50
/DM3	DALI Emergency	+ £219.50	/CF	Corridor Function	+ £39.50

# Dugas



- Compact die-cast aluminium wall light suitable for residential and hospitality applications (supplied less lamp)
- Installation in either upward or downward orientation
- Luminaire design allows for installation of GU10 LED lamps
- Graphite textured paint finish
- Option to add Bluetooth and WiFi enabled smart GU10 lamp(s)
  - AOCTOW/GU10LED/TW
  - AOCTOW/GU10LED/RGBTW

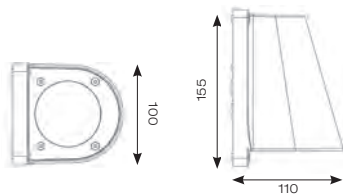

OCTO  
Compatible

Connected by  
**wiz**




CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	TRADE
ADU50	GU10	50W	1	IP44	£90.50

# Acero

## Directional Wall Light



- GU10 wall light suitable for residential applications (supplied less lamp)
- 316L Marine grade stainless steel directional wall light
- Stainless steel, black and copper finishes available
- Discrete PIR option available
- Option to add Bluetooth and WiFi enabled smart GU10 lamp(s)
  - AOCTOW/GU10LED/TW
  - AOCTOW/GU10LED/RGBTW

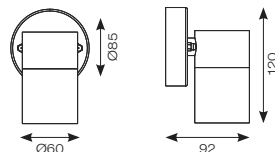

Matching  
Acero GU10 Spike Light  
see p388



1 metre - 7 metres  
10 seconds to 5 minutes  
10 to 2000 LUX



Stainless Steel



OCTO  
Compatible

Connected by

WIZ



Black - PIR



Copper

INPUT	HERTZ	TEMP	CLASS	IP	IK
220-240V	50/60Hz	-10°C to 40°C	1	IP44	IK06

CODE	DESCRIPTION	MAX WATTAGE	TRADE
AACERO/WLD/SSL	Stainless Steel	50W	£24.10
AACERO/WLD/BLK	Black		£24.10
AACERO/WLD/COP	Copper		£27.55
AACERO/WLD/SSL/PIR	Stainless Steel - PIR		£60.40
AACERO/WLD/BLK/PIR	Black - PIR		£60.40
AACERO/WLD/COP/PIR	Copper - PIR		£65.60




# Acero

## Bi-directional Wall Light



- GU10 wall light suitable for residential applications (supplied less lamp)
- 316L Marine grade stainless steel bi-directional wall light
- Stainless steel, black and copper finishes available
- Discrete PIR option available
- Option to add Bluetooth and WiFi enabled smart GU10 lamp(s)
  - AOCTOW/GU10LED/TW
  - AOCTOW/GU10LED/RGBTW

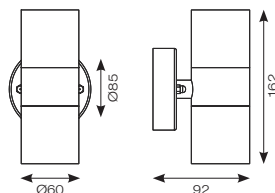

Matching  
Acero GU10 Spike Light  
see p388



1 metre - 7 metres  
10 seconds to 5 minutes  
10 to 2000 LUX



Stainless Steel



OCTO  
Compatible

Connected by

WIZ



Black



Copper - PIR


INPUT	HERTZ	TEMP	CLASS	IP	IK
220-240V	50/60Hz	-10°C to 40°C	1	IP44	IK06

CODE	DESCRIPTION	MAX WATTAGE	TRADE
AACERO/WL/SSL	GU10 - Stainless Steel	50W	£30.45
AACERO/WL/BLK	GU10 - Black		£30.45
AACERO/WL/COP	GU10 - Copper		£35.65
AACERO/WL/SSL/PIR	GU10 - Stainless Steel - PIR		£70.40
AACERO/WL/BLK/PIR	GU10 - Black - PIR		£70.40
AACERO/WL/COP/PIR	GU10 - Copper - PIR		£76.00



## Duo Midi

- Bi-directional wall light with housing in die-cast aluminium with a textured paint finish suitable for residential and hospitality applications (supplied less lamp)
- Large diameter housing to provide heat dissipation
- Option to add Bluetooth and WiFi enabled smart GU10 lamp(s)
  - AOCTOW/GU10LED/TW
  - AOCTOW/GU10LED/RGBTW

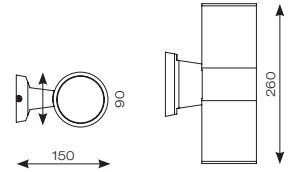

Black



OCTO  
Compatible

Connected by

WIZ



Silver Grey

GU10 LED  
Maximum Size




CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	IK	TRADE
ADM50GU10	GU10 - Black	2 x 50W	1	IP65	IK08	£76.00
ADM50GU10/SG	GU10 - Graphite					£76.00

# Tandem



## GU10 bi-directional wall light suitable for commercial and residential applications - supplied less lamp

- Bi-directional wall light with aluminium construction with graphite textured paint finish suitable for retail applications (supplied less lamp)
- Ideal for GU10 LED or GU10 mains halogen options
- Option to add Bluetooth and WiFi enabled smart GU10 lamp(s)
  - AOCTOW/GU10LED/TW
  - AOCTOW/GU10LED/RGBTW

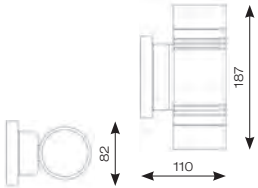


CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	TRADE
ATA2X50	GU10	2x50W	1	IP55	£104.00

# Reef Directional Wall Light Connected by WiZ



- Durable WiZ embedded outdoor directional wall light suitable for residential and hospitality applications
- Installation in either upward or downward orientation
- Choice of matt white or black finishes
- Polycarbonate construction ideal for coastal applications
- Tunable between 2700K - 6500K via WiZ App and voice control
- Unique lockable installation base plate with push fit loop-in loop-out terminals for ease of installation

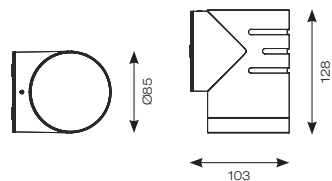

Black



OCTO Embedded

Connected by  
**WiZ**

Unique Click and Lock Mounting Bracket



White

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50Hz	-20°C to 40°C	L80 54,000	Ra 80	6	90°	2	IP65


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AREELEDWLD/OCTOW	Tunable White - Black	6W	2700K-6500K	450lm (2700K) - 500lm (6500K)	70lm (2700K) - 80lm (6500K)	£95.00
AREELEDWLD/WH/OCTOW	Tunable White - White					£95.00



# Reef Directional Wall Light



- Durable outdoor directional wall light suitable for residential and hospitality applications
- Installation in either upward or downward orientation
- Choice of matt white or black finishes
- Polycarbonate construction ideal for coastal applications
- CCT selectable between 3000K, 4000K and 6000K
- Unique lockable installation base plate with push fit loop-in loop-out terminals for ease of installation
- Non-dimmable

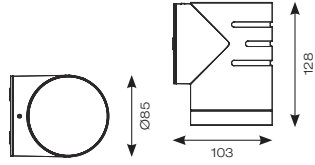

Black

Unique Click and Lock Mounting Bracket



White

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220-240V	50Hz	-20°C to 40°C	L80 54,000	Ra 80	6	90°	2	IP65


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AREELEDWLD	CCT Selectable - Black	5W	3000/4000/6000K	425lm (3000K) - 410lm (6000K)	85lm (3000K) - 82lm (6000K)	£47.20
AREELEDWLD/WH	CCT Selectable - White					£47.20

# Reef Bi-Directional Wall Light Connected by WiZ



Voice Control

- Durable WiZ embedded outdoor bi-directional wall light suitable for residential and hospitality applications
- Polycarbonate construction ideal for coastal applications
- Choice of matt white or black finishes
- Tunable between 2700K - 6500K via WiZ App and voice control
- Unique lockable installation base plate with push fit loop-in loop-out terminals for ease of installation



Black

OCTO  
Embedded

Connected by

WiZ

Unique Click and Lock  
Mounting Bracket



White

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220-240V	50Hz	-20°C to 40°C	L70 54,000	Ra 80	6	90°	2	IP65


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AREELEDWL/OCTOW	Tunable White - Black	10W	2700K-6500K	780lm (2700K) - 825lm (6500K)	78lm (2700K) - 82lm (6500K)	£95.00
AREELEDWL/WH/OCTOW	Tunable White - White					£95.00



# Reef CCT Bi-directional Wall Light



- Durable outdoor bidirectional wall light suitable for residential and hospitality applications
- Polycarbonate construction ideal for coastal applications
- Choice of matt white or black finishes
- CCT selectable between 3000K, 4000K and 6000K
- Unique lockable installation base plate with push fit loop-in loop-out terminals for ease of installation
- Discrete PIR option available
- Non-dimmable



**PIR**



1 metres - 10 metres  
5 seconds to 12 minutes  
3 to 1000 LUX



Black

**Unique Click and Lock  
Mounting Bracket**



White PIR


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50Hz	-20°C to 40°C	L80 54,000	Ra 80	6	90°	2	IP65

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AREELEDWL	CCT Selectable - Black					£47.10
AREELEDWL/PIR	CCT Selectable - Black - PIR	10W	3000/4000/6000K	885lm (4000K)	89lm (4000K)	£68.60
AREELEDWL/WH	CCT Selectable - White					£47.10
AREELEDWL/WH/PIR	CCT Selectable - White - PIR					£68.60

# Antila



- Bi-directional wall light suitable for residential and hospitality applications
- Die-cast aluminium construction with graphite paint finish
- 90° beam angle
- Non-Dimmable



Light Distribution



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-20 to 50°C	L80 50,000	Ra 80	3	30°	1	IP54	IK05

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ANTIALED	Cool White	12W	4000K	453lm	38lm	£60.50






# Zart



- Bi-directional LED wall light suitable for residential and hospitality applications
- Die-cast aluminium construction with graphite paint finish
- 105° beam angle
- Non-dimmable

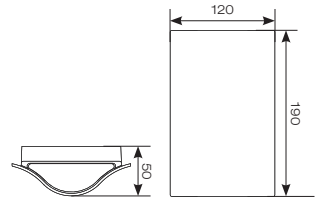

Light Distribution




INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-20 to 50°C	L80 50,000	Ra 80	5	105°	1	IP54	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AZATLED	Cool White	12W	4000K	491lm	41lm	£51.00

# Segano



- Bi-directional wall light suitable for residential and hospitality applications
- Die-cast aluminium construction with polycarbonate diffuser
- 90° beam angle
- Non-dimmable

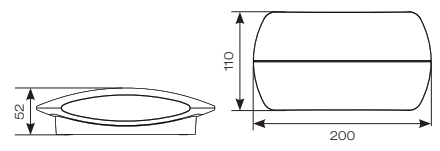

Light Distribution





INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-20 to 50°C	L80 50,000	Ra 80	3	90°	1	IP54	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ASEGLED	Cool White	13W	4000K	610lm	47lm	£42.50

# Gila



- Modern bi-directional wall light providing vivid angled light distribution suitable for residential and hospitality applications
- Die-cast aluminium body with a graphite powder coated anodized paint finish for enhanced durability
- Non-dimmable



Light Distribution




INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50/60Hz	-20°C to 40°C	L70 50,000	Ra 90	6	115°	1	IP55

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AGLED/WL	Cool White	11W	4000K	512lm	47lm	£169.00

# Brock Wall Light



- Modern bi-directional wall light providing vivid angled light distribution suitable for residential and hospitality applications
- Die-cast aluminium body with a graphite powder coated anodized paint finish for enhanced durability
- Non-dimmable

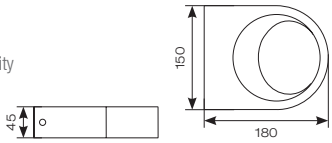

Matching Brock LED Bollard see p366



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-20°C to 25°C	L70 50,000	Ra 80	3	50°	2	IP65	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ABRLED/WL/CW	Cool White	7.7W	4000K	452lm	57lm	£143.00
ABRLED/WL/WW	Warm White	7.7W	3000K	448lm	56lm	£143.00






# Duo Midi



295

- Die-cast aluminium construction with graphite paint finish suitable for residential and hospitality applications
- 30° beam angle
- Non-dimmable
- Powered by Philips



AMENITY



Light Distribution



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220V-240V	50/60Hz	-20°C to 25°C	L70 50,000	Ra 80	5	30°	1	IP65	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ADMLED1/GR/CW	Cool White	19W	4000K	1648lm	87lm	£120.00
ADMLED2/GR/CW	Cool White	38W	4000K	4060lm	107lm	£151.00








# Doppio



- Powerful architectural bi-directional wall light suitable for hospitality and retail applications
- Die-cast aluminium construction with graphite paint finish
- 20° beam angle
- Non-dimmable




INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20°C to 40°C	L70 50,000	Ra 80	5	20°	1	IP65	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ADOLEDWL	Cool White	34W	4000K	2 x 848lm	50lm	£389.00

# Doppio HP




- High performance architectural bi-directional wall light suitable for hospitality and retail applications
- Die-cast aluminium construction with graphite paint finish
- 20° beam angle
- Non-dimmable



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20°C to 40°C	L70 50,000	Ra 80	3	20°	1	IP65	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ADOLEDWL/HP	Cool White	58W	4000K	2 x 3043lm	109lm	£452.00





 **The Coffee Shop** ON FIRST AVENUE

# Alto



- Surface bi-directional die-cast wall light providing adjustable beam angle suitable for residential and hospitality applications
- Independent beam angle adjustment between up and down distribution
- Minimum beam angle 0°, maximum beam angle 90°
- Die-cast aluminium body with graphite powder coated anodized paint finish for enhanced durability
- Non-dimmable



30°  
Beam Angle



Full Open  
Beam Angle



Independent Beam  
Angle Adjustment

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-20°C to 50°C	L80 50,000	Ra 80	3	90°	1	IP54	IK05


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ALTOLED	Cool White	6W	4000K	317lm	56lm	£58.50



# Beam



- Compact and powerful die-cast aluminium wall light suitable for residential and hospitality applications
- Dual purpose design allows installation as either a canopy downlight or as an uplight
- Allen key screws manufactured from marine grade stainless steel
- Non-dimmable

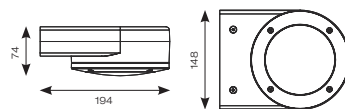

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	0°C to 25°C	L70 70,000	Ra 80	3	65°	1	IP65	IK02

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ABEAMLED	Cool White	20W	4000K	1300lm	65lm	£278.00






# Eclipse MultiLED CCT



- LED wall/ceiling luminaire with adjustable power and light output option suitable for education and commercial applications and ancillary areas
- One product with integral driver dip-switch
- Internal CCT selector switch allows the installer to choose the CCT between 3000K, 4000K and 6500K
- Corridor function options available for effective reduction in energy consumption
- Spun aluminium base with dished opal Visiluxe diffuser
- BESA box fixing versatile mounting options
- Option of white, chrome or satin chrome housing

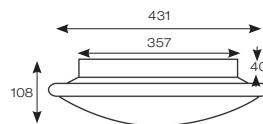

OCTO  
Option  
Available

Powered by  
CASAMBI

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-10°C to 25°C	L70 50,000	Ra 80	6	110°	1	IP20	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AECLED/W/CCT	CCT Selectable - White			1193lm (4000K - 11W)	108lm (4000K - 11W)	£169.00
AECLED/CH/CCT	CCT Selectable - Chrome	11W/14W/25W	3000K/4000K/6500K	1493lm (4000K - 14W)	107lm (4000K - 14W)	£187.00
AECLED/SC/CCT	CCT Selectable - Satin Chrome			2846lm (4000K - 25W)	114lm (4000K - 25W)	£187.00


CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Self-Test Emergency	+ £96.50	/DD	Digital Dimming (DD1/DD3/DD4)	+ £101.50
/DM3	DALI Emergency	+ £219.50	/MWS	Integral Microwave Sensor	+ £64.00
/OCTO	OCTO Smart Control	+ £208.50	/CF	Corridor Function	+ £39.50



# Mercury CCT



- IP44 polycarbonate wall/ceiling light suitable for corridors, stairwells and general amenity applications
- Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K at the point of installation
- BESA box fixing facility
- Integral laminated board heatsink provides high performance thermal management
- Digital dimming, self-test emergency, DALI emergency and microwave sensor options
- Chrome bezel accessory
- Powered by Tridonic



Chrome Trim Ring Fitted



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-10°C to 40°C	L70 56,000	Ra 80	6	110°	1	IP44	IK09

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AMERLED/CCT	CCT Selectable	19W	3000K/4000K	1246lm (4000K)	69lm (4000K)	£137.00


CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £96.50	/DD	Digital Dimming (DD1/DD3/DD4)	+ £101.50
/OCTO	OCTO Smart Control	+ £208.50	/MWS	Integral Microwave Sensor	+ £64.00
			/CF	Corridor Function	+ £39.50

CODE (ACCESSORIES)	DESCRIPTION	TRADE
AMERLEDBZ/CH	Chrome Trim Ring	£18.10

# Beta




- Multi-purpose compact surface LED bulkhead suitable for residential applications
- IP44 rating and suitable for bathroom use
- All polycarbonate construction
- Non-dimmable




INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50Hz	0°C to 25°C	L70 36,000	Ra 70	6	115°	1	IP44

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ABELED/WW	Cool White	5W	4000K	436lm	87lm	£39.25

# OCTO Gamma Mini Connected by WiZ



- Ultra slim modern WiZ enabled polycarbonate wall/ceiling light suitable for education and residential applications and ancillary areas
- Matt white finish to body and diffuser with optional chrome trim ring
- Rear fixing bracket and terminal housing for ease of installation
- Tunable between 2700K - 6500K via Wiz App and voice control
- IP54 rating and suitable for bathroom use
- Dimmable via WIZ App



Connected by  
**WIZ**



AMGAMLED/OCTOW




Chrome Trim Ring Fitted

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-5°C to 35°C	L70 54,000	Ra 80	6	110°	2	IP54	IK09


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AMGAMLED/OCTOW	Tunable White	10W	2700K-6500K	750lm (2700K) - 830lm (6500K)	77lm (2700K) - 86lm (6500K)	£93.50

CODE (ACCESSORIES)	DESCRIPTION	TRADE
AMGAMLEDBZ/CH	Chrome Trim Ring	£6.45

# OCTO Gamma Connected by WiZ



- Ultra slim modern WiZ enabled polycarbonate wall/ceiling light suitable for education and residential applications and ancillary areas
- Matt white finish to body and diffuser with optional chrome trim ring
- Rear fixing bracket and terminal housing for ease of installation
- Tunable between 2700K - 6500K via WiZ App and voice control
- IP54 rating and suitable for bathroom use
- Dimmable via WIZ App



AGAMLED/OCTOW



Chrome Trim Ring Fitted



OCTO  
Embedded

Connected by

WiZ

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-5°C to 35°C	L70 54,000	Ra 80	6	110°	2	IP54	IK09


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AGAMLED/OCTOW	Tunable White	19W	2700K-6500K	1500lm (2700K) - 1620lm (6500K)	82lm (2700K) - 90lm (6500K)	£156.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
AGAMLEDBZ/CH	Chrome Trim Ring	£10.10

# Gamma Mini



- Ultra slim modern polycarbonate wall/ceiling light suitable for education and residential applications and ancillary areas
- Matt white finish to body and diffuser with optional chrome trim ring
- Rear fixing bracket and terminal housing for ease of installation
- Microwave sensor set to 15 minutes at 3 metres (non-adjustable)
- /MWS and /MWS/M3 versions operate as "Masters" and can be used in conjunction with standard "Slaves"
- /MWS and MWS/M3 has integral photocell isolation switch
- Non-dimmable



AMGAMLED



Chrome Trim Ring Fitted

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-5°C to 35°C	L70 54,000	Ra 80	6	110°	2	IP54	IK09


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
<b>AMGAMLED</b>	Cool White	11W	4000K	1031lm	94lm	<b>£56.50</b>

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (ACCESSORIES)	DESCRIPTION	TRADE
/M3	Emergency	+ £55.50	AMGAMLEDBZ/CH	Chrome Trim Ring	£6.45
/MWS	Integral Microwave Sensor	+ £43.00	ASBP/24	4.8V 2Ah Ni-cd Replacement Battery	£29.30

# Gamma Mini CCT



- Ultra slim modern polycarbonate wall/ceiling light suitable for education and residential applications and ancillary areas
- Matt white finish to body and diffuser with optional chrome trim ring
- CCT selectable between 3000K and 4000K
- Rear fixing bracket and terminal housing for ease of installation
- Microwave sensor set to 15 minutes at 3 metres (non-adjustable)
- /MWS and /MWS/M3 versions operate as "Masters" and can be used in conjunction with standard "Slaves"
- /MWS and MWS/M3 has integral photocell isolation switch
- Non-dimmable



AMGAMLED/CCT



Chrome Trim Ring Fitted

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220-240V	50/60Hz	-5°C to 35°C	L70 54,000	Ra 80	6	110°	2	IP54	IK09

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AMGAMLED/CCT	CCT Selectable	10W	3000/4000K	1148lm (4000K)	115lm (4000K)	£56.50


CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (ACCESSORIES)	DESCRIPTION	TRADE
/M3	Emergency	+ £55.50	AMGAMLEDBZ/CH	Chrome Trim Ring	£6.45
/MWS	Integral Microwave Sensor	+ £43.00	ASBP/24	4.8V 2Ah Ni-od Replacement Battery	£29.30



# Gamma



- Ultra slim modern polycarbonate wall/ceiling light suitable for education and residential applications and ancillary areas
- Matt white finish to body and diffuser with optional chrome trim ring
- Rear fixing bracket and terminal housing for ease of installation
- Microwave sensor set to 15 minutes (non-adjustable)
- /MWS and /MWS/M3 versions operate as "Masters" and can be used in conjunction with standard "Slaves"
- /MWS and MWS/M3 has integral photocell isolation switch
- Non-dimmable



AGAMLED



Chrome Trim Ring Fitted

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-5°C to 35°C	L70 54,000	Ra 80	6	110°	2	IP54	IK09


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
<b>AGAMLED</b>	Cool White	18W	4000K	1675lm	93lm	<b>£110.00</b>

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (ACCESSORIES)	DESCRIPTION	TRADE
/M3	Emergency	+ £55.50	AGAMLEDBZ/CH	Chrome Trim Ring	£10.10
/MWS	Integral Microwave Sensor	+ £43.00	ASBP/24	4.8V 2Ah Ni-cd Replacement Battery	£29.30

# Gamma CCT



- Ultra slim modern polycarbonate wall/ceiling light suitable for education and residential applications and ancillary areas
- Matt white finish to body and diffuser with optional chrome trim ring
- CCT selectable between 3000K and 4000K
- Rear fixing bracket and terminal housing for ease of installation
- Microwave sensor set to 15 minutes at 3 metres (non-adjustable)
- /MWS and /MWS/M3 versions operate as "Masters" and can be used in conjunction with standard "Slaves"
- /MWS and MWS/M3 has integral photocell isolation switch
- Non-dimmable



AGAMLED/CCT




Chrome Trim Ring Fitted

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-5°C to 35°C	L70 54,000	Ra 80	6	110°	2	IP54	IK09


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AGAMLED/CCT	CCT Selectable	17W	3000/4000K	1847lm (4000K)	106lm (4000K)	£121.00

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (ACCESSORIES)	DESCRIPTION	TRADE
/M3	Emergency	+ £55.50	AGAMLEDBZ/CH	Chrome Trim Ring	£10.10
/MWS	Integral Microwave Sensor	+ £43.00	ASBP/24	4.8V 2Ah Ni-cd Replacement Battery	£29.30


# OCTO Disco Slim Connected by WiZ



- WiZ embedded slim and modern wall or ceiling light suitable for education and residential applications and ancillary areas
- All polycarbonate construction with opal diffuser and white trim ring with optional chrome or graphite ring
- Tunable between 2700K - 6500K via WiZ App and voice control
- Instant light output and unlimited switching

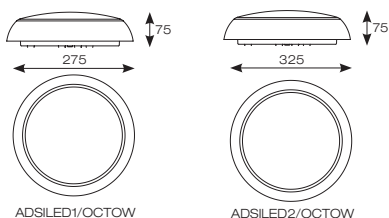

ADSILED1/OCTOW



fitted with chrome trim ring



fitted with graphite trim ring



OCTO  
Embedded

Connected by  
**WiZ**

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-10°C to 40°C	L70 36,000	Ra 80	6	110°	2	IP65	08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LMW	TRADE
ADSILED1/OCTOW	Tunable White	8W	2700K-6500K	720lm (2700K) - 708lm (6500K)	90lm (2700K) - 89lm (6500K)	£244.00
ADSILED2/OCTOW	Tunable White	11W	2700K-6500K	1150lm (2700K) - 1153lm (6500K)	105lm (2700K) - 112lm (6500K)	£271.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ADSILED1/BZ/CH	Chrome Trim Ring (8W)	£10.90
ADSILED1/BZ/GR	Graphite Trim Ring (8W)	£10.90


CODE (ACCESSORIES)	DESCRIPTION	TRADE
ADSILED2/BZ/CH	Chrome Trim Ring (11W)	£11.75
ADSILED2/BZ/GR	Graphite Trim Ring (11W)	£11.75



# Disco Slim CCT



- Slim and modern wall or ceiling light suitable for education and residential applications and ancillary areas
- All polycarbonate construction with opal diffuser and white trim ring with optional chrome or graphite ring
- CCT selectable between 3000K and 4000K
- Two options of microwave sensor emergency
- Instant light output and unlimited switching

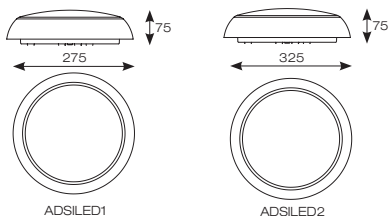

ADSILED1



fitted with chrome trim ring



fitted with graphite trim ring

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-10°C to 40°C	L70 60,000	Ra 80	6	110°	1	IP65	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ADSILED1	CCT Selectable	7W	3000/4000K	643lm (4000K)	92lm (4000K)	£78.00
ADSILED2	CCT Selectable	13W	3000/4000K	1083lm (4000K)	83lm (4000K)	£105.00


CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency (ADSILED2 only)	+ £61.00
/MWS	Integral Microwave Sensor (ADSILED2 only)	+ £51.50
/CF	Corridor Function	+ £27.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ADSILED/1BZ/CH	Chrome Trim Ring (7W)	£10.90
ADSILED/1BZ/GR	Graphite Trim Ring (7W)	£10.90
ADSILED/2BZ/CH	Chrome Trim Ring (13W)	£11.75
ADSILED/2BZ/GR	Graphite Trim Ring (13W)	£11.75

# Disco Slim Halo CCT



- Slim and modern wall or ceiling light suitable for education and residential applications and ancillary areas
- All polycarbonate construction with opal diffuser and white trim ring with optional chrome or graphite ring
- Unique design creates halo light spill effect
- CCT selectable between 3000K and 4000K
- Two options of microwave sensor emergency
- /MWS/M3/CF provides Corridor Function with Tridonic control gear
- Instant light output and unlimited switching



fitted with chrome trim ring



fitted with graphite trim ring



Halo light spill effect

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-10°C to 40°C	L70 60,000	Ra 80	6	110°	1	IP65	IK08


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ADSIHLED2	CCT Selectable	13W	3000/4000K	1198lm (4000K)	92lm (4000K)	£127.00

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (ACCESSORIES)	DESCRIPTION	TRADE
/M3	Emergency	+ £61.00	ADSILED/2BZ/CH	Chrome Trim Ring (13W)	£11.75
/MWS	Integral Microwave Sensor	+ £51.50	ADSILED/2BZ/GR	Graphite Trim Ring (13W)	£11.75
/CF	Corridor Function	+ £27.00			

# Disco CCT



- Wall or ceiling light suitable for education and residential applications and ancillary areas
- All polycarbonate construction with opal diffuser and white trim ring
- CCT selectable between 3000K and 4000K
- Two options of microwave sensor emergency
- Instant light output and unlimited switching

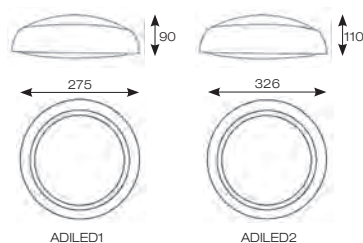

fitted with brass trim ring



fitted with chrome trim ring



fitted with silver grey trim ring

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-10°C to 40°C	L70 56,000	Ra 80	6	110°	1	IP65	IK08


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ADILED1	CCT Selectable	8W	3000/4000K	670lm (4000K)	83lm (4000K)	£91.50
ADILED2	CCT Selectable	12W	3000/4000K	1175lm (4000K)	98lm (4000K)	£125.00

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (ACCESSORIES)	DESCRIPTION	TRADE
/M3	Emergency (ADILED2 only)	+ £61.00	ADI28BZ/BR	Brass Trim Ring (12W)	Deleted
/MWS	Integral Microwave Sensor (ADILED2 only)	+ £51.50	ADI28BZ/CH	Chrome Trim Ring (12W)	Deleted
/CF	Corridor Function	+ £27.00	ADI28BZ/SG	Silver Grey Trim Ring (12W)	Deleted






# OCTO Astro Connected by WiZ



- WiZ embedded all polycarbonate multi-purpose LED square bulkhead suitable for ancillary areas and industrial applications
- Push fit feed-in, feed-out terminals for speed and ease of installation
- Tunable between 2700K - 6500K via WiZ App and voice control
- Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance
- Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance
- Instant light output and unlimited switching

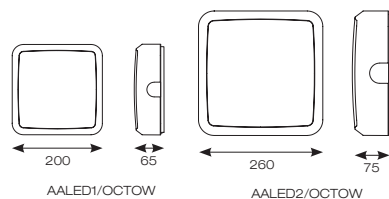

OCTO  
Embedded

Connected by  
**WiZ**



White



Black  
(Fitted with Trim Attachment)




White  
(Fitted with Trim Attachment)


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-10°C to 40°C	L70 36,000	Ra 80	6	115°	2	IP65	08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AALED1/BV/OCTOW	Tunable White - Black	8W	2700K-6500K	730lm (2700K) - 720lm (6500K)	91lm (2700K) - 90lm (6500K)	£294.00
AALED1/WV/OCTOW	Tunable White - White	11W	2700K-6500K	1150lm (2700K) - 1170lm (6500K)	105lm (2700K) - 106lm (6500K)	£328.50
AALED2/BV/OCTOW	Tunable White - Black	8W	2700K-6500K	730lm (2700K) - 720lm (6500K)	91lm (2700K) - 90lm (6500K)	£294.00
AALED2/WV/OCTOW	Tunable White - White	11W	2700K-6500K	1150lm (2700K) - 1170lm (6500K)	105lm (2700K) - 106lm (6500K)	£328.50

# OCTO Delta Connected by WiZ



- WiZ embedded all polycarbonate multi-purpose LED round bulkhead suitable for ancillary areas and industrial applications
- Push fit feed-in, feed-out terminals for speed and ease of installation
- Tunable between 2700K - 6500K via WiZ App and voice control
- Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance
- Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance
- Instant light output and unlimited switching

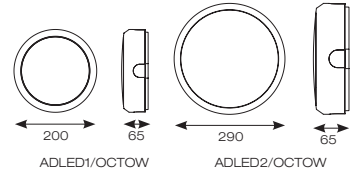

Black

White  
(Fitted with Trim Attachment)Black  
(Fitted with Louvred Bezel Trim)

OCTO  
Embedded

Connected by

WiZ

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-10°C to 40°C	L70 36,000	Ra 80	6	115°	2	IP65	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ADLED1/BV/OCTOW	Tunable White - Black	8W	2700K-6500K	700lm (2700K) - 712lm (6500K)	87.5lm (2700K) - 89lm (6500K)	£290.50
ADLED1/WV/OCTOW	Tunable White - White	8W	2700K-6500K	700lm (2700K) - 712lm (6500K)	87.5lm (2700K) - 89lm (6500K)	£290.50
ADLED2/BV/OCTOW	Tunable White - Black	11W	2700K-6500K	1100lm (2700K) - 1180lm (6500K)	100lm (2700K) - 108lm (6500K)	£319.50
ADLED2/WV/OCTOW	Tunable White - White	11W	2700K-6500K	1100lm (2700K) - 1180lm (6500K)	100lm (2700K) - 108lm (6500K)	£319.50


CODE (ACCESSORIES)	DESCRIPTION	TRADE
ADLED2/BZ/EYEB	Black Eyelid Bezel Trim (11W Only)	£19.05
ADLED2/BZ/EYEW	White Eyelid Bezel Trim (11W Only)	£17.10

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ADLED2/BZ/GRILL/B	Black Louvred Bezel Trim (11W Only)	£19.05
ADLED2/BZ/GRILL/W	White Louvred Bezel Trim (11W Only)	£17.10

# Astro CCT



- All polycarbonate multi-purpose LED square bulkhead suitable for ancillary areas and industrial applications
- Push fit feed-in, feed-out terminals for speed and ease of installation
- Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K
- Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance
- Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance
- Instant light output and unlimited switching

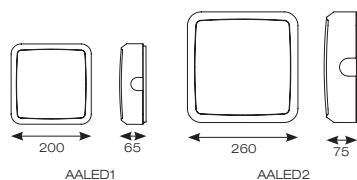

Black  
(Fitted with Trim Attachment)



White



White  
(Fitted with Trim Attachment)

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-10°C to 25°C	L70 56,000	Ra 80	6	115°	1	IP65	IK08


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AALED1/BV/CCT	CCT Selectable - Black	4/7W	3000/4000K	520/880lm (4000K, 4/7W)	125lm (4000K, 4/7W)	£85.50
AALED1/WV/CCT	CCT Selectable - White					£85.50
AALED2/BV/CCT	CCT Selectable - Black	7/13W	3000/4000K	915/1620lm (4000K 7/13W)	130/125lm (4000K 7/13W)	£120.00
AALED2/WV/CCT	CCT Selectable - White					£120.00

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/PC	Electronic Photocell	+ £38.50	/MWS	Integral Microwave Sensor (14W only)	+ £51.50
/M3	Emergency (14W only)	+ £61.00	/CF	Corridor Function	+ £27.00

# Delta CCT



- All polycarbonate multi-purpose LED round bulkhead suitable for ancillary areas and industrial applications
- Push fit feed-in, feed-out terminals for speed and ease of installation
- Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K
- Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance
- Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance
- Instant light output and unlimited switching

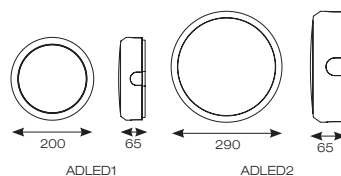

Black

White  
(Fitted with Trim Attachment)Black  
(Fitted with Louvred Bezel Trim)

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-10°C to 25°C	L70 56,000	Ra 80	6	115°	1	IP65	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ADLED1/BV/CCT	CCT Selectable - Black	4/7W	3000/4000K	500/860lm (4000K, 4/7W)	125lm (4000K, 4/7W)	£82.00
ADLED1/WV/CCT	CCT Selectable - White					£82.00
ADLED2/BV/CCT	CCT Selectable - Black	7/13W	3000/4000K	940/1640lm (4000K, 7/13W)	135/125lm (4000K, 7/13W)	£111.00
ADLED2/WV/CCT	CCT Selectable - White					£111.00

CODE (OPTIONS)	DESCRIPTION	TRADE
/PC	Electronic Photocell	+ £38.50
/M3	Emergency (14W only)	+ £61.00

CODE (OPTIONS)	DESCRIPTION	TRADE
/MWS	Integral Microwave Sensor (14W only)	+ £51.50
/CF	Corridor Function	+ £27.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ADLED2/BZ/EYE/B	Black Eyelid Bezel Trim (14W Only)	£19.05
ADLED2/BZ/EYE/W	White Eyelid Bezel Trim (14W Only)	£17.10


CODE (ACCESSORIES)	DESCRIPTION	TRADE
ADLED2/BZ/GRILL/B	Black Louvred Bezel Trim (14W Only)	£19.05
ADLED2/BZ/GRILL/W	White Louvred Bezel Trim (14W Only)	£17.10



# Vision Mini




- IP65 polycarbonate LED luminaire suitable for external residential and hospitality applications and ancillary areas
- Polycarbonate constructions allows installation into areas exposed to adverse weather conditions
- Standard and integrated PIR options available
- Non-dimmable

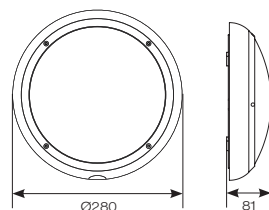

**PIR**



Max 8 metres  
8 seconds to 5 minutes  
2 to 2000 LUX



Discrete integral PIR



Graphite



Silver Grey Fitted with Louvered Eyelid Accessory



White Fitted with Plain Eyelid Accessory

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-10 to 40°C	L70 36,000	Ra 80	6	110°	1	IP65	IK09

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AVIMLED/GR	Graphite					£79.00
AVIMLED/SG	Silver Grey					£79.00
AVIMLED/W	White	9W	4000K	797lm	89lm	£79.00
AVIMLED/GR/PIR	Graphite - PIR					£100.50
AVIMLED/SG/PIR	Silver Grey - PIR					£100.50
AVIMLED/W/PIR	White - PIR					£100.50

CODE (OPTIONS)	DESCRIPTION	TRADE
/PC	Electronic Photocell (not available for PIR versions)	+ £38.50



CODE (ACCESSORIES)	DESCRIPTION	TRADE
AVIMLED/GR/EYE	Eyelid Accessory - Graphite	£10.80
AVIMLED/GR/LVD	Louvered Accessory - Graphite	£10.80
AVIMLED/SG/EYE	Eyelid Accessory - Silver Grey	£10.80

CODE (ACCESSORIES)	DESCRIPTION	TRADE
AVIMLED/SG/LVD	Louvered Eyelid Accessory - Silver Grey	£10.80
AVIMLED/W/EYE	Eyelid Accessory - White	£9.15
AVIMLED/W/LVD	Louvered Eyelid Accessory - White	£9.15

# Vision CCT



- IP65 CCT polycarbonate LED luminaire suitable for external hospitality and retail applications and ancillary areas
- Polycarbonate construction allows installation into areas exposed to adverse weather conditions
- Standard and integrated PIR options available
- CCT selectable between 3000K and 4000K
- Dimmable, Photocell, MWS and Emergency options available
- Powered by Tridonic

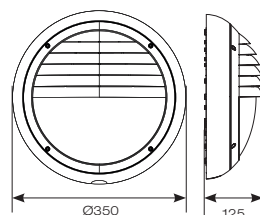

Discrete integral PIR



Graphite

White Fitted with Plain  
Eyelid AccessorySilver Grey Fitted with Louvred  
Eyelid Accessory

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-10 to 40°C	L70 36,000	Ra 80	6	110°	1	IP65	IK09

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AVILED/CCT/GR	CCT Selectable - Graphite					£116.00
AVILED/CCT/SG	CCT Selectable - Silver Grey					£116.00
AVILED/CCT/W	CCT Selectable - White					£116.00
AVILED/CCT/GR/PIR	CCT Selectable - Graphite - PIR	17W	3000/4000K	1420lm (4000K)	84lm (4000K)	£137.50
AVILED/CCT/SG/PIR	CCT Selectable - Silver Grey - PIR					£137.50
AVILED/CCT/W/PIR	CCT Selectable - White - PIR					£137.50

CODE (OPTIONS)	DESCRIPTION	TRADE
/PC	Electronic Photocell	+ £38.50
/M3	Emergency (14W only)	+ £96.50

CODE (OPTIONS)	DESCRIPTION	TRADE
/DD	Digital Dimming (DD1/DD3/DD4)	+ £101.50
/MWS	Integral Microwave Sensor	+ £64.00
/CF	Corridor Function	+ £39.50


CODE (ACCESSORIES)	DESCRIPTION	TRADE
AVILED/GR/EYE	Eyelid Accessory - Graphite	£12.65
AVILED/GR/LVD	Louvred Accessory - Graphite	£11.60
AVILED/SG/EYE	Eyelid Accessory - Silver Grey	£12.65

CODE (ACCESSORIES)	DESCRIPTION	TRADE
AVILED/SG/LVD	Louvred Eyelid Accessory - Silver Grey	£11.60
AVILED/W/EYE	Eyelid Accessory - White	£10.35
AVILED/W/LVD	Louvred Eyelid Accessory - White	£9.65

# Vision HP



- IP65 polycarbonate LED luminaire suitable for external hospitality and retail applications and ancillary areas
- Four conduit entry points
- Integral die-cast aluminium heatsink provides thermally managed high performance
- Dimmable, Photocell, MWS and Emergency options available
- Powered by Tridonic

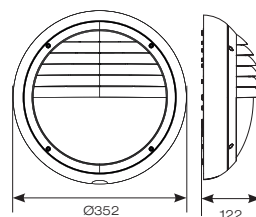

Removable conduit entry cap for ease of installation

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-10°C to 50°C	L70 36,000	Ra 80	6	110°	1	IP65	IK09

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AVILED/HP/GR	Cool White	31W	4000K	2426lm	78lm	£137.00

CODE (OPTIONS)	DESCRIPTION	TRADE
/PC	Electronic Photocell	+ £38.50
/M3	Emergency	+ £96.50

CODE (OPTIONS)	DESCRIPTION	TRADE
/DD	Digital Dimming (DD1/DD3/DD4)	+ £101.50
/MWS	Integral Microwave Sensor	+ £64.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
AVILED/GR/EYE	Eyelid Accessory - Graphite	£12.65


CODE (ACCESSORIES)	DESCRIPTION	TRADE
AVILED/GR/LVD	Louvered Accessory - Graphite	£11.60



# Helder CCT Circular



- All polycarbonate circular bulkhead suitable for external semi-commercial and residential applications
- Fast loop-in / loop-out connections
- CCT selectable between 3000K, 4000K and 6500K
- Body options of black or white with eyelid cover
- Polycarbonate opal diffuser
- Non-dimmable



Black



Black - Eyelid



White - Eyelid PIR


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220-240V	50/60Hz	-5°C to 25°C	L80 54,000	Ra 80	6	110°	2	IP54

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AHELED/CB	Black	12W				£31.25
AHELED/CW	White					£31.25
AHELED/CB/PIR	Black - PIR	12.5W	3000/4000/6500K	1058lm (4000K)	88lm (4000K)	£48.25
AHELED/CW/PIR	White - PIR					£48.25
AHELED/EB	Eyelid Black	12W				£31.25
AHELED/EW	Eyelid White					£31.25
AHELED/EB/PIR	Eyelid Black - PIR	12.5W	3000/4000/6500K	660lm (4000K)	54lm (4000K)	£48.25
AHELED/EW/PIR	Eyelid White - PIR					£48.25

# Helder CCT Oval



- All polycarbonate oval bulkhead suitable for external semi-commercial and residential applications
- Fast loop-in / loop-out connections
- CCT selectable between 3000K, 4000K and 6500K
- Body options of black or white
- Polycarbonate opal diffuser
- Non-dimmable

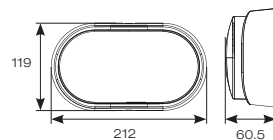

Black



White - PIR

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220-240V	50/60Hz	-5°C to 25°C	L80 54,000	Ra 80	6	110°	2	IP54


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AHELED/OB	CCT Selectable - Black					£31.25
AHELED/OW	CCT Selectable - White					£31.25
AHELED/OB/PIR	CCT Selectable - Black - PIR	12W	3000/4000/6500K	1105lm (4000K)	96lm (4000K)	£48.25
AHELED/OW/PIR	CCT Selectable - White - PIR					£48.25



# Sorrento CCT



- Shallow depth IP65 polycarbonate 2-In-1 LED bulkhead suitable for external commercial applications
- Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K
- Supplied with both plain and louvred eyelid covers
- Non-dimmable

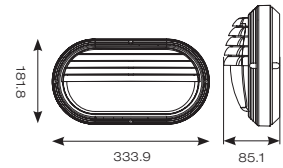

Black  
Fitted with Plain Cover



White  
Fitted with Plain Cover



Black  
Fitted with Louvred Eyelid Cover



White  
Fitted with Louvred Eyelid Cover


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	0°C to 25°C	L70 56,000	Ra 80	6	115°	2	IP65	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ASR2LED/B/CCT	CCT Selectable - Black	8W	3000/4000K	721lm (4000K)	90lm (4000K)	£68.00
ASR2LED/W/CCT	CCT Selectable - White					£68.00

# Sleek



- All polycarbonate multi-purpose bulkhead suitable for external commercial applications
- Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance
- Instant light output and unlimited switching
- Non-dimmable

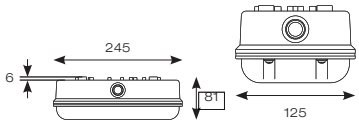

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	0°C to 25°C	L70 36,000	Ra 80	6	105°	2	IP65	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ASBLED	Cool White	6W	4000K	440lm	73lm	£41.75


CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/PC	Electronic Photocell	+ £38.50	/MWS	Integral Microwave Sensor	+ £64.00

# Sleek 110V



333

- 110V all polycarbonate multi-purpose LED bulkhead suitable for all types of site lighting
- Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance
- Instant light output and unlimited switching
- Red diffuser accessory available for applications that require warning indication luminaires
- Non-dimmable



AMENITY



Sleek 110V fitted with red polycarbonate Lens accessory

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
110V	50Hz	-10°C to 40°C	L80 36,000	Ra 80	6	105°	2	IP65	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ASBLED/110V	Cool White	5W	4000K	420lm	84lm	£32.80

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/PC	Electronic Photocell	+ £38.50	/MWS	Integral Microwave Sensor	+ £64.00


CODE (ACCESSORIES)	DESCRIPTION	TRADE
ASBLED/DIFF/RED	Red Polycarbonate Lens	£8.55



# E27 Aluminium Bulkhead



- Bulkhead suitable for commercial applications (supplied less lamp)
- Aluminium alloy body to prevent corrosion
- Option of vandal resistant polycarbonate or glass lens

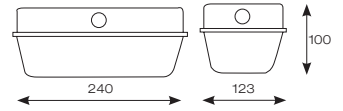

A100PC



A100GC

**E27 LED**  
Maximum Size


CODE	DESCRIPTION	WATTAGE	CLASS	IP	TRADE
A100PC	E27 - Polycarbonate Lens	100W	1	IP65	£16.85
A100GC	E27 - Glass Lens				£26.25

CODE (OPTIONS)	DESCRIPTION	TRADE
/PC	Electronic Photocell	+ £38.50

# E27 Polycarbonate Bulkhead



- Bulkhead suitable for commercial applications (supplied less lamp)
- Vandal resistant all polycarbonate construction

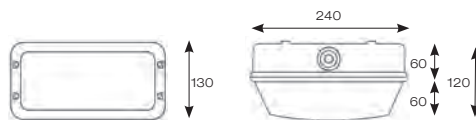

## E27 LED

Maximum Size



CODE	DESCRIPTION	WATTAGE	CLASS	IP	TRADE
A100POLY	E27 - Black Base	100W	2	IP65	£17.45



CODE (OPTIONS)	DESCRIPTION	TRADE
/PC	Electronic Photocell	+ £38.50



# Camini



- Compact low level square LED pathway light with downward light spill suitable for residential and hospitality applications
- Die-cast aluminium construction with graphite paint finish
- Supplied c/w plastic installation box and pre-wired with 1 metre of rubber insulated cable for ease of installation
- Non-dimmable

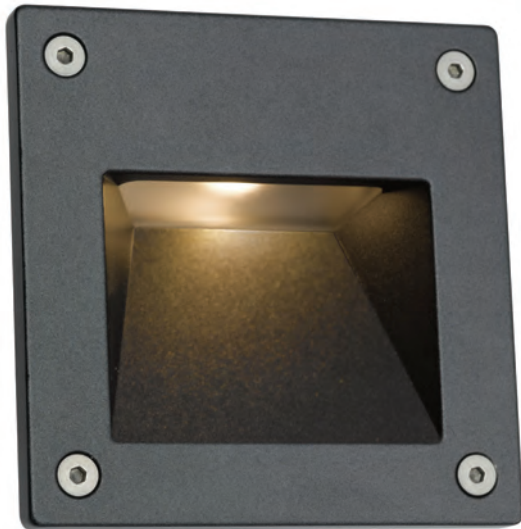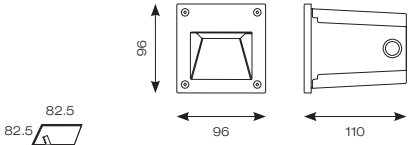

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20°C to 25°C	L70 50,000	Ra 80	5	70°	1	IP65	IK02


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ACSQLEDWL	Cool White	3W	4000k	79lm	22lm	£119.00

# Parona



337

- Compact low level circular LED pathway light with downward light spill suitable for residential and hospitality applications
- Die-cast aluminium construction with graphite paint finish
- Supplied c/w plastic installation box and pre-wired with 1 metre of rubber insulated cable for ease of installation
- Non-dimmable

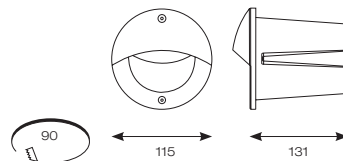

AMENITY



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20°C to 25°C	L70 50,000	Ra 80	5	70°	1	IP65	IK02


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
APCLEDWL	Cool White	3W	4000K	68lm	23lm	£117.00



# Mattone Bricklight CCT




- Universal polycarbonate LED bricklight suitable for residential and hospitality applications
- Plain frame or eyelid option
- Unique adjustable feet allows for installation into multiple brick apertures
- Polycarbonate construction ideal for coastal applications
- Pre-wired with 500mm of rubber insulated cable
- Supplied c/w installation housing for additional protection and ease of installation
- CCT selectable between 3000K and 4000K
- Non-dimmable



Eyelid

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-10°C to 40°C	L70 54,000	Ra 80	6	100°	1	IP65	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AMATBLED	CCT Selectable	2W	3000/4000K	101lm (4000K)	51lm (4000K)	£71.00
AMATB/EYE	CCT Selectable - Eyelid					£54.50

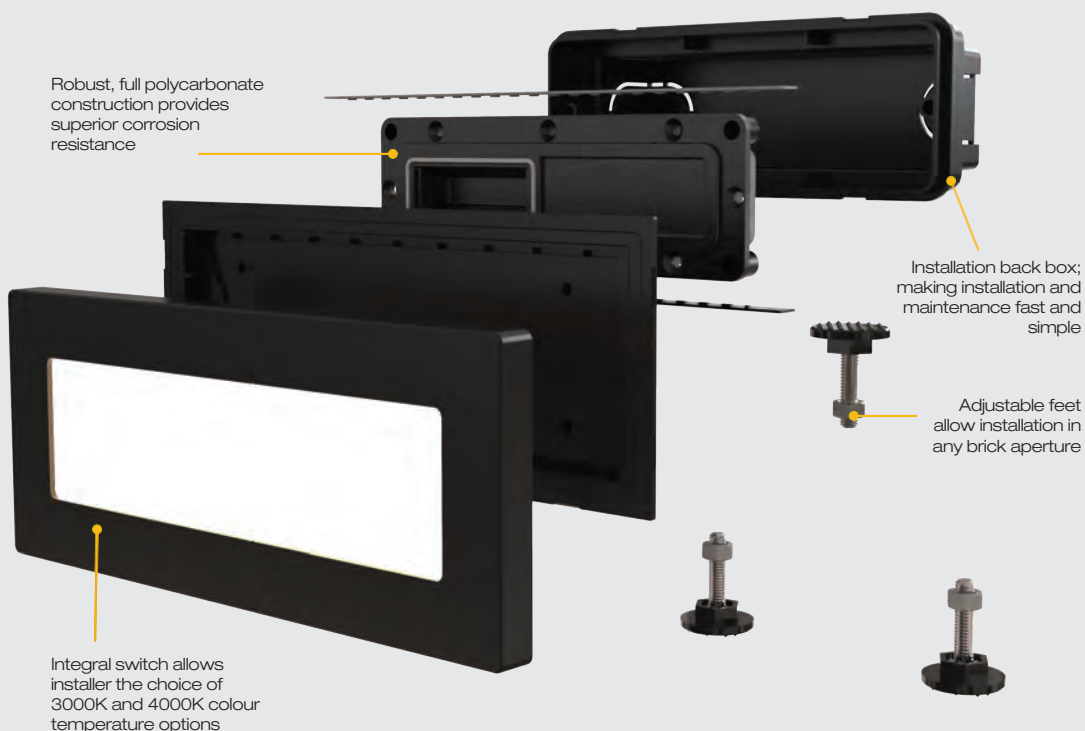

## Adjustable Feet Design

The unique adjustable feet design allows installation into a range of brick apertures, ranging from 115mm in height to 85mm, ensuring suitability and a precise fit for many brick apertures. The feet allow the product to maintain a fixed position during installation, ensuring it is fast and simple.



## Plug and Play Design


The plug and play design allows the front plate to be temporarily disconnected during installation, allowing the installer easier access to adjust the feet and fix the housing in position before cementing into the wall construction. The installer will simply re-connect the front plate to the housing using the plug and play connector.



# Libretto Bricklight



- Recessed bricklight light suitable for commercial and residential applications
- Stainless steel front cover with clear polycarbonate front lens and recessed housing
- Integral driver with loop-in, loop-out connections
- Non-dimmable





INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50Hz	-10°C to 25°C	L70 40,000	Ra 65	6	85°	2	IP65

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ALIBLED/WHI	Daylight	2W	6000K	126lm	63lm	£39.15

# Fidenza Bricklight



- Recessed bricklight light suitable for commercial and residential applications
- Die-cast aluminium housing and front cover
- Toughened front frosted glass
- Metal back box with cable entries for ease of installation
- Optional grill and hood front covers
- Non-dimmable

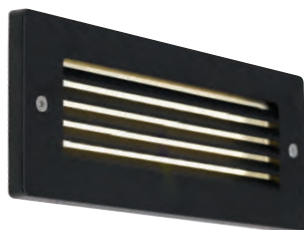

Grill Cover Fitted



Eyelid Cover Fitted

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20°C to 25°C	L70 50,000	Ra 65	5	80/95°	1	IP65	IK02

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AFBLLED	Cool White	2.2W	4000K	145lm	66lm	£131.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
AFBL/GRILL	Front Grill Cover	£22.95

CODE (ACCESSORIES)	DESCRIPTION	TRADE
AFBL/EYE	Front Eyelid Cover	£22.95







## Inox Stainless Steel Bricklight



- Die-cast aluminium bricklight with AISI316L stainless steel front cover
- suitable for commercial and residential applications
- Tempered and frosted 4mm glass diffuser
- Supplied c/w polyethylene back box for recessing
- Non-dimmable



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-25°C to 35°C	L70 50,000	Ra 70	3	80/95°	1	IP54	IK07


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ABLFLED/SS	Warm White	12W	3000K	270lm	23lm	£240.00

# Volant



345

- Modern low level surface brick light/wall light suitable for residential and hospitality applications
- General illumination ideal for pathway/walkway illumination
- Die-cast aluminium housing graphite powder coated anodized finish
- Tempered frosted glass
- Non-dimmable

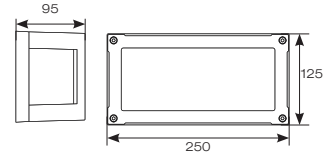

AMENITY



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50Hz	-10 to 50°C	L80 50,000	Ra 80	5	140°	1	IP54

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AVOLEDSWL	Cool White	7W	4000K	302lm	43lm	£78.50






# Calore



347

- Ultra modern E27 exterior wall light suitable for residential and hospitality applications (supplied less lamp)
- Die-cast frame with tempered glass enclosure
- Textured powder coated anthracite finish
- Ideal for use with LED Filament lamps
- Option to add Bluetooth and WiFi enabled smart A60 filament lamp(s)
  - AOCTOW/A60/TW/AMB/E27
  - AOCTOW/A60/TW/CL/E27

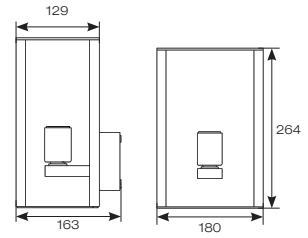

AMENITY



OCTO  
Compatible

Connected by

WIZ

**E27 LED**  
Maximum Size



CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	TRADE
ACAL/E27	E27	40W	1	IP44	£104.00

Warrington: +44 (0) 1942 433333


Belfast: +44 (0) 2890 773750



# Leo Polycarbonate Half Lantern Connected by WiZ



- Modern styled WiZ embedded half lantern with polycarbonate construction suitable for commercial and residential applications
- White reflector with clear polycarbonate diffuser
- Polycarbonate construction is ideal for coastal applications
- Tunable between 2700K - 6500K via WiZ App and voice control



Matching Leo Connected by WiZ Bollard see p372



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-10°C to 40°C	L70 36,000	Ra 80	6	130°	2	IP65	IK06


  

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ALEOLED/HL/OCTOW	Tunable White	9W	2700K-6500K	759lm (2700K) - 755lm (6500K)	41lm (2700K) - 40lm (6500K)	£125.50

# Leo Polycarbonate Lantern Connected by WiZ



- Modern styled WiZ embedded wall lantern with polycarbonate construction suitable for commercial and residential applications
- White reflector with clear polycarbonate diffuser
- Polycarbonate construction is ideal for coastal applications
- Tunable between 2700K - 6500K via WiZ App and voice control



Matching  
Leo Connected by WiZ  
Bollard see p372



OCTO  
Embedded

Connected by

WiZ


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-10°C to 40°C	L70 36,000	Ra 80	6	130°	2	IP65	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ALEOLED/ML/OCTOW	Tunable White	9W	2700K-6500K	474lm (2700K) - 446lm (6500K)	52lm (2700K) - 56lm (6500K)	£130.00

# Leo CCT Half Lantern



- Modern styled half wall lantern with polycarbonate construction suitable for commercial and residential applications
- White reflector with clear polycarbonate diffuser
- Polycarbonate construction is ideal for coastal applications
- PIR option for convenience and security. Incorporates manual override option
- CCT selectable between 3000K and 4000K
- Non-dimmable



Matching Leo CCT Bollard see p373



1 metre - 10 metres  
8 seconds to 12 minutes  
0 to 1000 LUX



PIR


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220/240V	50Hz	-10°C to 40°C	L70 54,000	Ra 80	6	130°	2	IP65	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ALEOLED/HL	CCT Selectable	8W	3000K/4000K	330lm (4000K)	41lm (4000K)	£33.20
ALEOLED/HL/PIR	CCT Selectable - PIR					£78.50

# Leo CCT Wall Lantern



- Modern styled wall lantern with polycarbonate construction suitable for commercial and residential applications
- White reflector with clear polycarbonate diffuser
- Polycarbonate construction is ideal for coastal applications
- PIR option for convenience and security. Incorporates manual override option
- CCT selectable between 3000K and 4000K
- Non-dimmable



Matching  
Leo CCT Bollard  
see p373



1 metre - 10 metres  
8 seconds to 12 minutes  
0 to 1000 LUX



PIR

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220/240V	50Hz	-10°C to 40°C	L70 54,000	Ra 80	6	130°	2	IP65	IK06


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ALEOLED/WL	CCT Selectable	8W	3000K/4000K	450lm (4000K)	56lm (4000K)	£44.30
ALEOLED/WL/PIR	CCT Selectable - PIR					£83.50



# Latina Half Lantern



- Contemporary IP65 half lantern and resistant to corrosion suitable for commercial and residential applications
- Textured polycarbonate finish and tinted lens
- LED light bar for uniform light output
- PIR option for convenience and security. Incorporates manual override option
- Colour matching PIR lens cover ensures discreet appearance
- Non-dimmable



## PIR



Max 8 metres  
5 seconds to 8 minutes  
2 - 2000 LUX -  
PhotoCell Off



Black



White - PIR


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-10 to 40°C	L90 36,000	Ra 80	6	110°	2	IP65	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ALHLLLED/BL	Black					£55.50
ALHLLLED/WH	White					£55.50
ALHLLLED/PC/BL	Black - Photocell	8W	3000K	400lm	53lm	£79.00
ALHLLLED/PC/WH	White - Photocell					£79.00
ALHLLLED/PIR/BL	Black - PIR					£72.50
ALHLLLED/PIR/WH	White - PIR					£72.50

# Latina E27 Half Lantern



- Contemporary IP65 half lantern and resistant to corrosion suitable for commercial and residential applications (supplied less lamp)
- Textured polycarbonate finish and tinted lens
- PIR option for convenience and security. Incorporates manual override option
- Colour matching PIR lens cover ensures discreet appearance
- Option to add Bluetooth and WiFi enabled smart A60 filament lamp(s)
  - AOCTOW/A60/TW/AMB/E27
  - AOCTOW/A60/TW/CL/E27



**PIR**



Max 8 metres  
5 seconds to 8 minutes  
2 - 2000 LUX -  
Photocell Off



OCTO  
Compatible

Connected by

**WIZ**



Black



White - PIR

**E27 LED**  
Maximum Size




CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	IK	TRADE
ALHL/BL	Black					£47.50
ALHL/WH	White					£47.50
ALHL/PC/BL	Black - Photocell	42W	2	IP65	IK08	£71.00
ALHL/PC/WH	White - Photocell					£71.00
ALHL/PIR/BL	Black - PIR					£64.50
ALHL/PIR/WH	White - PIR					£64.50

# Latina Wall Lantern



- Contemporary IP65 polycarbonate lantern range and resistant to corrosion suitable for commercial and residential applications
- LED light bar for uniform light output
- Unique design provides installer with option of top arm or bottom arm mounting, without the need of additional wiring (PIR version bottom arm mounting only)
- Textured polycarbonate finish and tinted lens
- PIR option for convenience and security. Incorporates manual override option
- Colour matching PIR lens ensures discreet appearance
- Non-dimmable



White



Black - PIR



Corner Bracket - Black

PIR



Max 8 metres  
5 seconds to 8 minutes  
2 - 2000 LUX -  
Photocell Off

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-10 to 40°C	L90 36,000	Ra 80	6	360°	2	IP65	IK08


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ALWLLED/BL	Black	8W	3000K	546lm	68lm	£55.50
ALWLLED/WH	White					£55.50
ALWLLED/PIR/BL	Black - PIR					£72.50
ALWLLED/PIR/WH	White - PIR					£72.50

CODE (ACCESSORIES)	DESCRIPTION	TRADE	CODE (ACCESSORIES)	DESCRIPTION	TRADE
ALWL/CBB	Wall Lantern Corner Bracket Black	£13.20	ALWL/CBW	Wall Lantern Corner Bracket White	£13.20

# Latina E27 Wall Lantern



- Contemporary IP65 polycarbonate lantern range and resistant to corrosion suitable for commercial and residential applications (supplied less lamp)
- Unique design provides installer with option of top arm or bottom arm mounting, without the need of additional wiring (PIR version bottom arm mounting only)
- Textured polycarbonate finish and tinted lens
- PIR option for convenience and security. Incorporates manual override option
- Colour matching PIR lens ensures discreet appearance
- Option to add Bluetooth and WiFi enabled smart A60 filament lamp(s)
  - AOCTOW/A60/TW/AMB/E27
  - AOCTOW/A60/TW/CL/E27



White



Black - PIR



Corner Bracket - White



OCTO  
Compatible

Connected by

WIZ

PIR



Max 8 metres  
5 seconds to 8 minutes  
2 - 2000 LUX -  
Photocell Off

E27 LED

Maximum Size




CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	IK	TRADE
ALWL/BL	E27 - Black					£47.50
ALWL/WH	E27 - White					£47.50
ALWL/PIR/BL	E27 - Black - PIR	42W	2	IP65	IK08	£64.50
ALWL/PIR/WH	E27 - White - PIR					£64.50

CODE (ACCESSORIES)	DESCRIPTION	TRADE	CODE (ACCESSORIES)	DESCRIPTION	TRADE
ALWL/CBB	Wall Lantern Corner Bracket Black	£13.20	ALWL/CBW	Wall Lantern Corner Bracket White	£13.20

# Roma



- Die-cast aluminium half-lantern in black suitable for residential and hospitality applications (supplied less lamp)
- Clear polycarbonate diffuser for E27 versions
- Option to add Bluetooth and WiFi enabled smart A60 filament lamp(s)
  - AOCTOW/A60/TW/AMB/E27
  - AOCTOW/A60/TW/CL/E27



OCTO  
Compatible

Connected by  
**WIZ**




CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	IK	TRADE
ARE27/HL/BL	E27	100W	2	IP44	IK07	£119.00



# Lampara



- E27 lantern suitable for commercial and residential applications (supplied less lamp)
- Die-cast aluminium construction with transparent polycarbonate diffuser
- Black paint finish
- Option to add Bluetooth and WiFi enabled smart A60 lamp(s)
  - AOCTOW/A60LED/TW/E27
  - AOCTOW/A60/TW/FR/E27



OCTO  
Compatible

Connected by

WIZ

**E27 LED**

Maximum Size




CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	IK	TRADE
ALE27/WL/BL	E27	100W	1	IP44	IK07	£134.00


# Nizza




- Die-cast aluminium four sided lantern suitable for commercial and residential applications
- Black paint finish
- Smoked glass diffuser
- Full size post lanterns incorporate hinged door for easy wiring access
- Option to add Bluetooth and WiFi enabled smart A60 filament lamp(s)
  - AOCTOW/A60/TW/AMB/E27
  - AOCTOW/A60/TW/CL/E27



ANE27/PIL/BL



ANE27/WLTA/B



ANE27/WLBA/BL



Wall Lantern - Bottom Arm



Pillar Lantern



OCTO  
Compatible

Connected by  
**wiz**



CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	IK	TRADE
ANE27/WLTA/BL	E27 Wall Lantern - Top Arm - Black					£91.00
ANE27/WLBA/BL	E27 Wall Lantern - Bottom Arm - Black	60W	1	IP44	IK07	£91.00
ANE27/PIL/BL	E27 Wall Lantern - Pillar Lantern - Black					£106.00






# Talana Solar



- Ultra modern die-cast solar powered aluminium LED bollard suitable for semi-commercial and residential applications
- PIR motion sensor as standard
- 2 operation modes:-
  - 1) 11% output after sunset, motion detected 100% output, no motion 11% for 20 hours
  - 2) Motion detected 100% output, no motion off
- Graphite textured powder coat paint finish

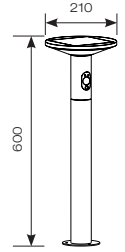

Matching Talana Solar Wall Light see p273



TEMP	LIFETIME (HRS)	CRI	SDCM	CLASS	IP	IK
-20°C to 45°C	L70 36,000	Ra 80	6	3	IP54	IK07

CODE	DESCRIPTION	CCT	LUMENS	TRADE
ATASLEDB/60	Cool White	4000K	210lm	£158.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ASBP/17	7.4V 1500mAh Replacement Li-Ion Battery	£24.45






# Senza



- Contemporary die-cast aluminium LED bollard suitable for residential and hospitality applications
- Graphite textured powder coat paint finish
- Available in 3000K and 4000K options
- Flange mounted base for surface fixing
- Non-dimmable



Matching Senza Wall Light see p269



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20°C to 45°C	L70 36,000	Ra 80	6	80/140°	1	IP54	IK07


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	A	TRADE
ASELEDB/060	600mm - Cool White	6.5W	4000K	366lm	52lm	600mm	£115.00
ASELEDB/100	1000mm - Cool White	6.5W	4000K	366lm	52lm	1000mm	£135.00
ASELEDB/060/WW	600mm - Warm White	6.5W	3000K	406lm	65lm	600mm	£115.00
ASELEDB/100/WW	1000mm - Warm White	6.5W	3000K	406lm	65lm	1000mm	£135.00



# Arco



- Ultra modern LED bollard suitable for residential and hospitality applications
- Graphite textured powder coated paint finish
- Flange mounted base for surface mounting
- Available in 3000K and 4000K options
- Non-dimmable



Matching Arco Wall Light see p270



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20°C to 45°C	L70 36,000	Ra 80	6	60/90°	1	IP54	IK07


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	A	TRADE
AARLEDB/060	600mm - Cool White	11W	4000K	643lm	58lm	600mm	£133.00
AARLEDB/100	1000mm - Cool White	11W	4000K	643lm	58lm	1000mm	£158.00
AARLEDB/060/WW	600mm - Warm White	11W	3000K	468lm	46lm	600mm	£133.00
AARLEDB/100/WW	1000mm - Warm White	11W	3000K	468lm	46lm	1000mm	£158.00



# Brock



- Modern bi-directional bollard providing vivid angled light distribution suitable for residential and hospitality applications
- Die-cast aluminium body with a graphite powder coated paint finish for enhanced durability
- Supplied c/w root mounting kit
- Available in 3000K and 4000K options
- Non-dimmable



Matching Brock Wall Light see p292



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-20°C to 25°C	L70 50,000	Ra 80	3	50°	1	IP65	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ABRLEDB/650/CW	Cool White	7.7W	4000K	452lm	57lm	£233.00
ABRLEDB/650/WW	Warm White	7.7W	3000K	447lm	56lm	£233.00






# Duet



- Ultra modern bollard with die-cast aluminium body suitable for residential and hospitality applications
- Powder coated anodized graphite paint finish for enhanced durability
- Flange mounted base for surface fixing
- Non-dimmable



Light distribution from the rear of the bollard



Light distribution from the front of the bollard

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
100V-240V	50/60Hz	-20°C to 45°C	L70 36,000	Ra 80	6	110°	1	IP65	IK07

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ADULEDB/080	Cool White	17W	4000K	1540lm	91lm	£201.00






# Taurus



371


- Robust die-cast aluminium bollard with a textured graphite finish suitable for education, commercial and hospitality applications
- Die-cast aluminium head with polycarbonate lens
- Integral emergency option
- Supplied c/w root mounting kit
- Non-dimmable
- Powered by Philips



AMENITY



Emergency Operation



PIR option

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-25°C to 50°C	L70 44,000	Ra 70	5	130°	1	IP66	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ATALEDB/1000	Cool White	25W	4000K	2390lm	96lm	£301.00
ATALEDB/1000/PIR	Cool White - PIR					£320.50

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £101.50	/PC	Electronic Photocell	+ £38.50




# Leo Polycarbonate Bollard Connected by WiZ



Voice Control

- Modern styled WiZ embedded bollard with polycarbonate construction suitable for residential and hospitality applications
- White reflector with clear polycarbonate diffuser
- Polycarbonate construction is ideal for coastal applications
- Supplied c/w root mounting kit, can be surface mounted with rawbolts
- Tunable between 2700K - 6500K via WiZ App and voice control



Matching  
Leo Connected by WiZ  
Lanterns see  
p348 and p349



Connected by  
**WiZ**

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-10°C to 40°C	L70 36,000	Ra 80	6	130°	1	IP65	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	A	TRADE
ALEOLED/045/GR/OCTOW	Tunable White - 450mm	9W	2700K-6500K	560lm (2700K) - 572lm (6500K)	61lm (2700K) - 64lm (6500K)	450mm	£214.50
ALEOLED/075/GR/OCTOW	Tunable White - 750mm	11W		836lm (2700K) - 852lm (6500K)	69lm (2700K) - 77lm (6500K)	750mm	£251.50
ALEOLED/100/GR/OCTOW	Tunable White - 1000mm					1000mm	£277.50

# Leo CCT



373

- Modern styled bollard with polycarbonate construction suitable for residential and hospitality applications
- White reflector with clear polycarbonate diffuser
- Polycarbonate construction is ideal for coastal applications
- Supplied c/w root mounting kit, can be surface mounted with rawbolts
- CCT selectable between 3000K and 4000K
- Non-dimmable
- Powered by Tridonic



AMENITY



Matching  
Leo CCT Lanterns  
see p350 and p351



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-10 to 40°C	L80 36,000	Ra 80	6	130°	2	IP65	IK08


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	A	TRADE
ALEOLED/CCT/045/GR	CCT Selectable - 450mm	8W		592lm (4000K)	74lm (4000K)	450mm	£145.00
ALEOLED/CCT/075/GR	CCT Selectable - 750mm	12W	3000/4000K	940lm (4000K)	76lm (4000K)	750mm	£180.00
ALEOLED/CCT/100/GR	CCT Selectable - 1000mm					1000mm	£203.00



# Monza



- Die-cast extruded aluminium bollard with external louvred head suitable for residential, hospitality and commercial applications (supplied less lamp)
- Textured black powder coat finish
- Option to add Bluetooth and WiFi enabled smart A60 lamp(s)
  - AOCTOW/A60LED/TW/E27
  - AOCTOW/A60/TW/FR/E27



OCTO  
Compatible

Connected by



**E27 LED**  
Maximum Size


CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	IK	A	TRADE
AME27045/BL	E27 - 450mm - Black					450mm	£186.00
AME27075/BL	E27 - 750mm - Black	100W	1	IP44	IK07	750mm	£217.00
AME27100/BL	E27 - 1000mm - Black					1000mm	£247.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ARMK3	Root Mounting Kit	£70.50

# Monza Inox Stainless Steel



- High Grade AISI 316L stainless steel bollard suitable for residential, hospitality and commercial applications (supplied less lamp)
- External louvred head and opal polycarbonate diffuser
- Option to add Bluetooth and WiFi enabled smart A60 lamp(s)
  - AOCTOW/A60LED/TW/E27
  - AOCTOW/A60/TW/FR/E27



OCTO  
Compatible

Connected by

WIZ

**E27 LED**  
Maximum Size



CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	IK	A	TRADE
AME27045/SS	E27 - 450mm - Stainless Steel					450mm	£423.00
AME27075/SS	E27 - 750mm - Stainless Steel	100W	1	IP44	IK07	750mm	£488.00
AME27100/SS	E27 - 1000mm - Stainless Steel					1000mm	£591.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ARMK3	Root Mounting Kit	£70.50






# Aquila



- Die-cast aluminium bollard with four pillars and opal polycarbonate diffuser suitable for residential, hospitality and commercial applications (supplied less lamp)
- Textured black powder coat finish
- Option to add Bluetooth and WiFi enabled smart A60 lamp(s)
  - AOCTOW/A60LED/TW/E27
  - AOCTOW/A60/TW/FR/E27



OCTO  
Compatible

Connected by




**E27 LED**  
Maximum Size

CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	IK	A	TRADE
AAE27045/BL	E27 - 450mm - Black					450mm	£152.00
AAE27075/BL	E27 - 750mm - Black	75W	1	IP44	IK07	750mm	£178.00
AAE27100/BL	E27 - 1000mm - Black					1000mm	£213.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ARMK3	Root Mounting Kit	£70.50

# Libra

- Die-cast aluminium bollard with polycarbonate diffuser suitable for residential and commercial applications (supplied less lamp)
- Internal stainless steel louvre
- Detachable head for easy access to lamp housing
- Suitable for surface mounting
- Supplied with root mounting kit
- Option to add Bluetooth and WiFi enabled smart A60 lamp(s)
  - AOCTOW/A60LED/TW/E27
  - AOCTOW/A60/TW/FR/E27

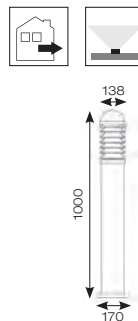

Connected by




CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	TRADE
ALIB/100E27	E27 Bollard - Black	100W	1	IP65	£134.00





## Rondo Surface/Spike Light



- High performance LED feature light suitable for hospitality and retail applications
- Suitable for surface or spike mounting (spike accessory included)
- 60° beam angle
- Die-cast aluminium construction with textured graphite paint finish
- Pre-wired with 2 metres of H07RN-F cable
- Non-dimmable



Spike Mounting



Surface Mounting


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
230V	50/60Hz	-20°C to 40°C	L70 50,000	Ra 80	6	40°	1	IP65

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AROLESSS	Cool White	17W	4000K	1500lm	88lm	£164.00

# Lazer Projector



- High performance LED projector light suitable for hospitality and retail applications
- Push fit loop-in loop-out for ease of installation
- Die-cast aluminium construction with textured graphite paint finish
- Hood accessory available
- Non-dimmable



Hood Accessory

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220-240V	50Hz	-20°C to 40°C	L70 50,000	Ra 80	6	30°	1	IP66


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ALAZPLED2	Warm White	24W	3000K	2450lm	102lm	£239.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ALAZPLED/H	Hood Accessory	£30.95

# Meteor



- Surface or submersible spot suitable for external residential and hospitality applications
- 316L stainless steel construction housing with adjustable head
- Pre-wired with 3 metres of rubber insulated cable
- Submersible to a depth of up to 3 metres

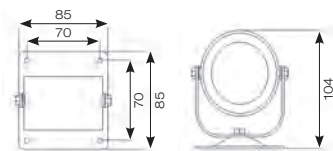

INPUT	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
350mA	-20°C to 40°C	L70 50,000	Ra 75	6	15°	3	IP68	IK10

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AMETLED	Cool White	6W	4000K	547lm	91lm	£211.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
AD9W/350	9W 350mA LED Driver	£22.85
ADK20W/350	20W 350mA LED Driver	£16.50


CODE (ACCESSORIES)	DESCRIPTION	TRADE
ADDIM/30/MC	30W Multi-current LED Dimmable Driver	£47.50
ADDIM/50/MC	50W Multi-current LED Dimmable Driver	£60.00

# Spirit

## Asymmetrical Projector



- High performance LED projector light suitable for commercial applications
- Die-cast aluminium construction with textured graphite finish
- Non-dimmable
- Internal application examples:- Transport hubs, churches and historical buildings amongst other commercial applications. Ideal to improve atmosphere and brighten indoor spaces
- External application examples:- Commercial buildings to provide a sufficient wall washer effect for projected facades
- Powered by Tridonic




INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	0°C to 25°C	L90 B50 36,000	Ra 80	3	40/100°	1	IP65	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ASPPLED/ASY/CW	Cool White	24W	4000K	1700lm	71lm	£219.00
ASPPLED/ASY/WW	Warm White	24W	3000K	1600lm	66lm	£219.00

# Spirit Symmetrical Projector



- High performance LED projector light suitable for commercial applications
- Die-cast aluminium construction with textured graphite finish
- Non-dimmable
- Internal application examples:- Historical buildings, churches and hotel lobbies. Ideal at improving atmosphere and brightening indoor spaces
- External application examples:- Communal and residential gardens, ideal for illuminating landscapes providing a sufficient floodlight effect
- Powered by Tridonic



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	0°C to 25°C	L90 B50 36,000	Ra 80	3	65°	1	IP65	IK06


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ASPPLD/SYM/CW	Cool White	24W	4000K	2150lm	90lm	£266.00
ASPPLD/SYM/WW	Warm White	24W	3000K	1975lm	83lm	£266.00






# Garletta

## Connected by WiZ



- Dual purpose WiZ embedded garden spotlight supplied with wall mounting bracket and spike suitable for coastal areas
- Create the ambience of your choice with 16 million colours, as well as warm to cool white light (AGARLED/RGBTW/OCTOW)
- Tunable between 2700K - 6500K via WiZ App and voice control (AGARLED/TW/OCTOW)
- Polycarbonate construction suitable for coastal areas
- Pre-wired with 2 metres of rubber insulated cable



AGARLED/RGBTW/OCTOW  
Only



OCTO  
Embedded

Connected by  
**WiZ**



Spike Fixing



Wall Mounting



AGARLED/RGBTW/OCTOW  
Red



AGARLED/RGBTW/OCTOW  
Green



AGARLED/RGBTW/OCTOW  
Blue


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220/240V	50Hz	-20°C to 45°C	L80 54,000	Ra 80	6	100°	2	IP65

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AGARLED/RGBTW/OCTOW	RGB Tunable White	6.5W	2700-6500K (RGB)	450lm (2700k) - 500lm (6500k)	69lm (2700k) - 77lm (6500k)	£118.00
AGARLED/TW/OCTOW	Tunable White	6.5W	2700-6500K	450lm (2700k) - 500lm (6500k)	69lm (2700k) - 77lm (6500k)	£113.00

# Garletta GU10



- Spike light suitable for residential or hospitality applications
- Dual purpose garden spotlight supplied with wall mounting bracket and spike
- Polycarbonate construction suitable for coastal areas
- Pre-wired with 2 metres of rubber insulated cable
- Suitable for GU10 LED lamps only as detailed
- Suitable for Bluetooth and WiFi enabled smart WIZ GU10 lamp
  - AOCTOW/GU10LED/TW
  - AOCTOW/GU10LED/RGBTW



Spike Fixing



Wall Mounting




CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	IK	TRADE
AGAR/GU10	GU10	5W	2	IP65	IK08	£69.50

# Flora GU10



- Spike light suitable for residential or hospitality applications
- Dual purpose garden spotlight supplied with wall mounting bracket and spike
- Polycarbonate construction suitable for coastal areas
- Manufactured from 100% recyclable materials
- Pre-wired with 2 metres of rubber insulated cable
- Suitable for GU10 LED lamps only as detailed
- Option to add Bluetooth and WiFi enabled smart WIZ GU10 lamp
  - AOCTOW/GU10LED/TW
  - AOCTOW/GU10LED/RGBTW



Spike Fixing



Wall Mounting



OCTO  
Compatible

Connected by

WIZ

## GU10 LED

Maximum Size




CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	IK	TRADE
AFGS/GU10LED	GU10 LED	5W	2	IP65	IK08	£55.50

# Acero GU10



- 316L Marine grade stainless steel spike light suitable for residential applications
- Ideal for GU10 LED
- Stainless steel, black and copper finishes available
- Pre-wired with 2 metre of rubber insulated cable for ease of installation
- Option to add Bluetooth and WiFi enabled smart GU10 lamp(s)
  - AOCTOW/GU10LED/TW
  - AOCTOW/GU10LED/RGBTW



Matching Acero GU10 Wall Lights see p279 - p280



Stainless Steel



OCTO Compatible

Connected by **WIZ**



Black

Copper




INPUT	HERTZ	TEMP	CLASS	IP	IK
220-240V	50/60Hz	-10°C to 40°C	1	IP44	IK06

CODE	DESCRIPTION	MAX WATTAGE	TRADE
AACERO/SL/BLK	GU10 LED - Black	50W GU10	£34.60
AACERO/SL/COP	GU10 LED - Copper	50W GU10	£39.70
AACERO/SL/SSL	GU10 LED - Stainless Steel	50W GU10	£34.60

# Turlock



- Powerful compact LED inground uplight suitable for commercial, hospitality and residential applications
- Die-cast aluminium construction with 316L stainless steel top frame
- Static load test to 2000kg
- Supplied c/w installation housing for additional protection and ease of installation
- Pre-wired with 1 metre of rubber insulated cable
- Non-dimmable
- Powered by HEP



2-way Mini drive over cover



4-way Mini drive over cover

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20 to 25°C	L70 50,000	Ra 80	5	20°	1	IP67	IK10

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ATURWOLED/70	Cool White	3W	4000K	135lm	45lm	£65.50
ATURWOLED/70/WW	Warm White	3W	3000K	124lm	41lm	£65.50


CODE (ACCESSORIES)	DESCRIPTION	TRADE
ATURWOLED/70/2	2-Way Mini Drive Over Cover Accessory	£33.45

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ATURWOLED/70/4	4-Way Mini Drive Over Cover Accessory	£33.45

# Turlock



- High performance inground uplight suitable for commercial, hospitality and residential applications
- Static load test to 2000kg
- Supplied c/w installation housing for additional protection and ease of installation
- Die-cast aluminium construction with 316L stainless steel top frame
- Pre-wired with 1 metre of rubber insulated cable
- Non-dimmable
- Powered by HEP

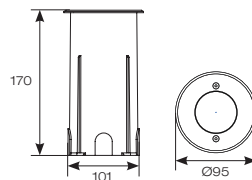


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20 to 25°C	L70 50,000	Ra 80	3	20°	1	IP67	IK10

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ATURWOLED/95	Cool White	4W	4000K	390lm	97lm	£129.00
ATURWOLED/95/WW	Warm White	4W	3000K	301lm	75lm	£129.00

# Turlock



- High performance inground uplight suitable for commercial, hospitality and residential applications
- Static load test to 2000kg
- Supplied c/w installation housing for additional protection and ease of installation
- Die-cast aluminium construction with 316L stainless steel top frame
- Pre-wired with 1 metre of rubber insulated cable
- Triac dimmable as standard
- Powered by HEP

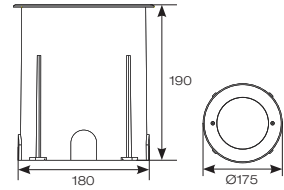

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20 to 25°C	L70 50,000	Ra 80	3	20°	1	IP67	IK10


CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
<b>ATURWOLED/175</b>	Cool White	8W	4000K	884lm	110lm	<b>£231.00</b>
<b>ATURWOLED/175/WW</b>	Warm White	8W	3000K	785lm	98lm	<b>£231.00</b>



# Turlock



- High performance inground uplight suitable for commercial, hospitality and residential applications
- Static load test to 2000kg
- Supplied c/w installation housing for additional protection and ease of installation
- Die-cast aluminium construction with 316L stainless steel top frame
- Pre-wired with 1 metre of rubber insulated cable
- Non-dimmable

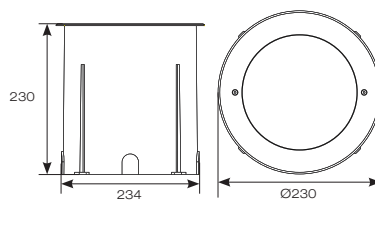



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20 to 25°C	L70 50,000	Ra 80	3	20°	1	IP67	IK10

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
ATURWOLED/230	Warm White	19W	4000K	2214lm	116lm	£362.00
ATURWOLED/230/WW	Cool White	19W	3000K	2021lm	106lm	£362.00

# Fresno



- High performance LED adjustable inground uplight suitable for commercial and hospitality applications
- 304L stainless steel bezel and powder coated aluminium housing
- Supplied c/w installation housing for additional protection and ease of installation
- Integral driver and pre-wired with 2 metres of rubber insulated cable
- Static load test to 2000kg and therefore suitable for vehicular and pedestrian traffic
- Non-dimmable

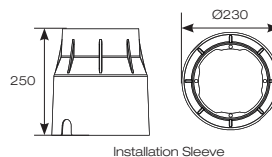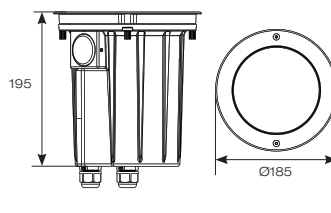

Adjustable 30° beam angle



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-20 to 40°C	L80 50,000	Ra 80	3	20°	1	IP67	IK10

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AFRWOLED/185	Warm White	15W	3000K	903lm	60lm	£269.00
AFRWOLED/185/CW	Cool White	15W	4000K	1092lm	73lm	£269.00

# Fresno



- High performance LED adjustable inground uplight suitable for commercial and hospitality applications
- 304L stainless steel bezel and powder coated aluminium housing
- Supplied c/w installation housing for additional protection and ease of installation
- Integral driver and pre-wired with 2 metres of rubber insulated cable
- Static load test to 2000kg and therefore suitable for vehicular and pedestrian traffic
- Non-dimmable

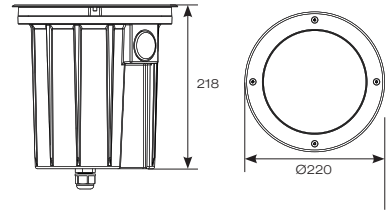

Adjustable 30° beam angle



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-20 to 40°C	L80 50,000	Ra 80	3	20°	1	IP67	IK10

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AFRWOLED/220	Warm White	20W	3000K	998lm	50lm	£312.00
AFRWOLED/220/CW	Cool White	20W	4000K	1076lm	54lm	£312.00

# Fresno



- High performance LED adjustable inground uplight suitable for commercial and hospitality applications
- 304L stainless steel bezel and powder coated aluminium housing
- Supplied c/w installation housing for additional protection and ease of installation
- Integral driver and pre-wired with 2 metres of rubber insulated cable
- Static load test to 2000kg and therefore suitable for vehicular and pedestrian traffic
- Non-dimmable

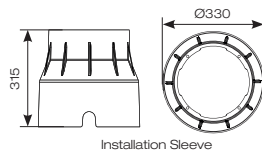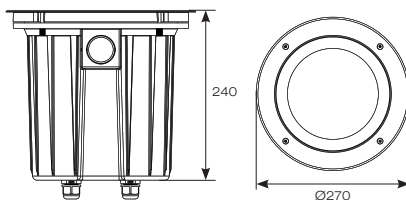

Adjustable 30° beam angle


INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50Hz	-20 to 40°C	L80 50,000	Ra 80	3	20°	1	IP67	IK10

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
AFRWOLED/270	Warm White	30W	3000K	1770lm	59lm	£407.00
AFRWOLED/270/CW	Cool White	30W	4000K	1938lm	65lm	£407.00

# GU10/MR16 Inground Uplight



- GU10/MR16 inground uplight suitable for residential applications
- Supplied with both MR16 and GU10 lampholders
- Compact inground uplight which accepts 12V and LED lamps
- Housing in die-cast aluminium with clear toughened glass diffuser of 10mm thickness
- 316 stainless steel top ring and stainless steel allen key screws
- Suitable for light vehicular traffic with a static impact resistance of up to 2000kgs
- Supplied with recessed sleeve in high resistant thermoplastic
- Option to add Bluetooth and WiFi enabled smart GU10 lamp(s)
  - AOCTOW/GU10LED/TW
  - AOCTOW/GU10LED/RGBTW
- **Caution: surface glass temperature will get very hot under normal halogen operation. It is recommended to use GU10 LED lamps for cooler operation.**

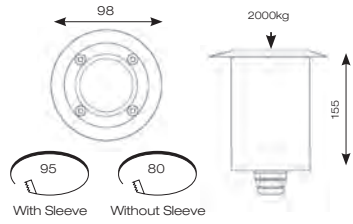

Connected by




CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	IK	TRADE
AW050	GU10/MR16	50W	1 (GU10), 3 (MR16)	IP67	IK10	£51.50



## GU10 Adjustable Inground Uplight

- GU10 adjustable inground uplight suitable for residential applications
- Die-cast aluminium housing with a clear toughened glass diffuser of 8mm thickness
- 304 stainless steel top ring and stainless steel allen key screws
- Adjustable lampholder to allow up to 15° vertical inclination of lamp
- Suitable for pedestrian traffic with a static impact resistance of up to 1000kgs
- Option to add Bluetooth and WiFi enabled smart GU10 lamp(s)
  - AOCTOW/GU10LED/TW
  - AOCTOW/GU10LED/RGBTW
- **Caution: surface glass temperature will get very hot under normal halogen operation. It is recommended to use GU10 LED lamps for cooler operation.**

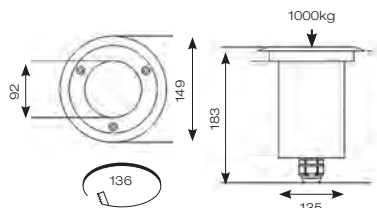

Connected by

WIZ



CODE	DESCRIPTION	MAX WATTAGE	CLASS	IP	IK	TRADE
AWO/GU10	GU10	50W	1	IP65	IK10	£89.50