





*Duo Midi LED* p242



*Duo LED Bollard* p300



## ILUMINACIÓN EXTERIOR

---



*Decorativo en pared*



*Moldeado arquitectónico en pared*



*Direccional en pared*



*Decorativo en techo/pared*



*Polycarbonato en techo/pared*



*Apliques*

276

*Empotrada en pared*

283

*Farolas y medias farolas*

289

*Bolardos*

306

*Faroles portátiles*


309

*Iluminación de paisajes*



312

*Focos ascendentes y controladores en tierra*



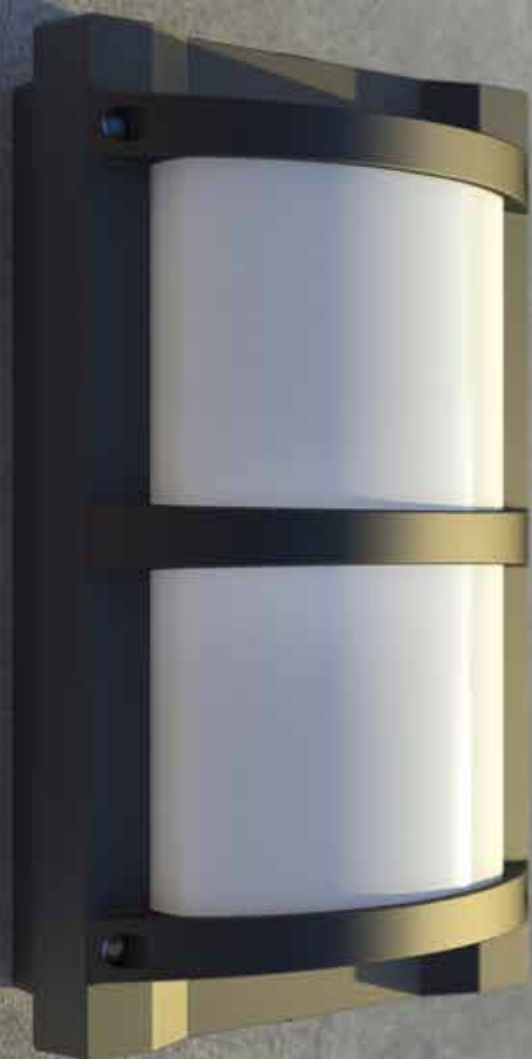

*Diseñado para*  
***Entregar...***



AFULED/W



AFULED/GR

|      |               |
|------|---------------|
| W    | 10W           |
| Lm/D | 719lm         |
| Lm/W | 74lm          |
| CRI  | Ra 80         |
| CCT  | 3000K         |
| V    | 230V          |
| Hz   | 50/60Hz       |
| Temp | -20°C to 40°C |

|           |     |           |    |
|-----------|-----|-----------|----|
| AFULED/W  | LED | 10W 3000K | W  |
| AFULED/GR | LED | 10W 3000K | GR |



# Galia LED



Llave Allen

AGALSQLED

LED

10W 4000K

IP  
65

CE





10W  
LED = 26W  
PLC




L70  
50,000

DIM

DCA



|      |               |
|------|---------------|
| W    | 10W           |
| Lm/D | 300lm         |
| Lm/W | 30lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 100V-240V     |
| Hz   | 50-60Hz       |
| Temp | -20°C to 25°C |

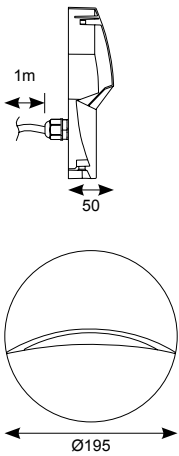

Llave Allen

|      |               |
|------|---------------|
| W    | 10W           |
| Lm/D | 360lm         |
| Lm/W | 36lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 100V-240V     |
| Hz   | 50-60Hz       |
| Temp | -20°C to 25°C |

|           |     |           |
|-----------|-----|-----------|
| AMATROLED | LED | 10W 4000K |
|-----------|-----|-----------|





# Kappa LED


220



AKLED/B




AKLED/SG




|          |     |            |      |
|----------|-----|------------|------|
| AKLED/B  | LED | 4.5W 4000K | ● B  |
| AKLED/SG | LED | 4.5W 4000K | ● SG |

|      |             |
|------|-------------|
| W    | 4.5W        |
| Lm/D | 270lm       |
| Lm/W | 60lm        |
| CRI  | Ra 70       |
| CCT  | 4000K       |
| V    | 100V-240V   |
| Hz   | 50-60Hz     |
| Temp | 0°C to 25°C |



6-9m  
5 sec - 8 min  
10 - 2000 LUX



ASELED/WL



ASELED/WL/PIR

|      |               |
|------|---------------|
| W    | 6.5W          |
| Lm/D | 366lm         |
| Lm/W | 52lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 220V-240V     |
| Hz   | 50-60Hz       |
| Temp | -20°C to 45°C |

|               |     |                                                                                                  |
|---------------|-----|--------------------------------------------------------------------------------------------------|
| ASELED/WL     | LED | 6.5W 4000K                                                                                       |
| ASELED/WL/PIR | LED | 6.5W 4000K  |

# Arco LED

222




AARLED/WL



AARLED/WL/PIR






6 - 10m  
8 sec - 8 min  
5 - 200 LUX



|               |     |                                                                                               |
|---------------|-----|-----------------------------------------------------------------------------------------------|
| AARLED/WL     | LED | 11W 4000K                                                                                     |
| AARLED/WL/PIR | LED | 11W 4000K  |


|      |               |
|------|---------------|
| W    | 11W           |
| Lm/D | 643lm         |
| Lm/W | 58lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 100V-240V     |
| Hz   | 50-60Hz       |
| Temp | -20°C to 45°C |



ATLED/WL



ATLED/WL/PIR

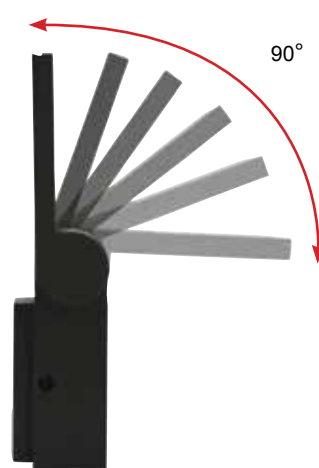

|      |               |
|------|---------------|
| W    | 10W           |
| Lm/D | 738lm         |
| Lm/W | 73lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 100V-240V     |
| Hz   | 50-60Hz       |
| Temp | -20°C to 45°C |

|              |     |                                                                                                 |
|--------------|-----|-------------------------------------------------------------------------------------------------|
| ATLED/WL     | LED | 10W 4000K                                                                                       |
| ATLED/WL/PIR | LED | 10W 4000K  |

# Dolce LED






ADOCLED/WL




ADOCLED/WL/PIR

|                |     |                                                                                         |
|----------------|-----|-----------------------------------------------------------------------------------------|
| ADOCLED/WL     | LED | 10W                                                                                     |
| ADOCLED/WL/PIR | LED | 10W  |




|      |               |
|------|---------------|
| W    | 10W           |
| Lm/D | 690lm         |
| Lm/W | 76lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 100/240V      |
| Hz   | 50/60Hz       |
| Temp | -20°C to 45°C |





**Modos operativos**



**Funciona con energía solar**


|      |               |
|------|---------------|
| Lm/D | 230lm         |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| Temp | -20°C to 45°C |

|            |                                         |       |
|------------|-----------------------------------------|-------|
| APAVLED/WL | LED                                     | 4000K |
| Batería    |                                         |       |
| ASBP/17    | 7.4V 1500mAh Replacement Li-ION Battery |       |

# Talana Solar LED




**Modos operativos**



**Funciona con energía solar**



6 - 10m  
1 min  
10 - 45 LUX







ATASLED/WL LED 4000K

Batería

ASBP/17 7.4V 1500mAh Replacement Li-ION Battery

|      |               |
|------|---------------|
| Lm/D | 210lm         |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| Temp | -20°C to 45°C |



ATRILED/B  
3000K



ATRILED/G  
4000K



Powered by  
**TRIDONIC**  
enlightening your ideas

|            |                |
|------------|----------------|
| W          | 8W             |
| Lm/D       |                |
| Cool White | 701lm          |
| Warm White | 695lm          |
| Lm/W       |                |
| Cool White | 88lm           |
| Warm White | 87lm           |
| CRI        | Ra 80          |
| CCT        | 3000K<br>4000K |
| V          | 220-240V       |
| Hz         | 50/60Hz        |
| Temp       | -20°C to 25°C  |

|           |     |                    |   |
|-----------|-----|--------------------|---|
| ATRILED/B | LED | 8W - 4000K/3000K - | B |
| ATRILED/G | LED | 8W - 4000K/3000K - | G |
| /PC       |     |                    |   |
| /MWS      |     |                    |   |



# Lucca LED CCT

228



ALUCLED/B



ALUCLED/G




Interruptores integrales para opciones de CCT seleccionables y multivarios.



Powered by  
**TRIDONIC**  
enlightening your ideas




Cubierta de entrada de conducto extraíble de 20 mm para facilitar la instalación




|           |     |                             |
|-----------|-----|-----------------------------|
| ALUCLED/B | LED | 18W/27W - 4000K/3000K - ● B |
| ALUCLED/G | LED | 18W/27W - 4000K/3000K - ● G |

|      |  |
|------|--|
| /PC  |  |
| /M3  |  |
| /SM3 |  |
| /DM3 |  |
| /MWS |  |

| W        | 18W/27W        |        |
|----------|----------------|--------|
| Lm/D     | 4000K          | 3000K  |
| 18W      | 1149lm         | 1091lm |
| 27W      | 1622lm         | 1563lm |
| Lm/W 18W | 64lm           | 61lm   |
| Lm/W 27W | 60lm           | 58lm   |
| CRI      | Ra 80          |        |
| CCT      | 4000K<br>3000K |        |
| V        | 220-240V       |        |
| Hz       | 50/60Hz        |        |
| Temp     | -20°C to 25°C  |        |



Cubierta de entrada de conducto extraíble de 20 mm para facilitar la instalación




ANAPLED/B

ANAPLED/G



Interruptores integrales para opciones de CCT seleccionables y multivarios.



Powered by  
**TRIDONIC**  
enlightening your ideas

|          |               |        |
|----------|---------------|--------|
| W        | 18W/27W       |        |
| Lm/D     | 4000K         | 3000K  |
| 18W      | 2104lm        | 2012lm |
| 27W      | 3065lm        | 2924lm |
| Lm/W 18W | 117lm         | 112lm  |
| Lm/W 27W | 114lm         | 108lm  |
| CRI      | Ra 80         |        |
| CCT      | 4000K         | 3000K  |
| V        | 220-240V      |        |
| Hz       | 50/60Hz       |        |
| Temp     | -20°C to 25°C |        |

|           |     |                           |
|-----------|-----|---------------------------|
| ANAPLED/B | LED | 18W/27W - 4000K/3000K - B |
| ANAPLED/G | LED | 18W/27W - 4000K/3000K - G |

|      |  |
|------|--|
| /PC  |  |
| /M3  |  |
| /SM3 |  |
| /DM3 |  |
| /MWS |  |

# Dugas

230



**IP  
44**




**GU10 LED**




**GU10  
Halogen**

**DCA**



100



155



110

**ADU50**

**GU10**

**50W**



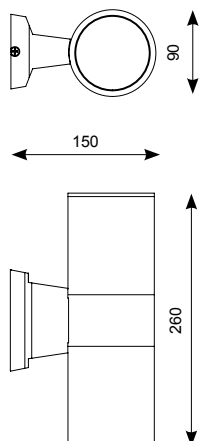

ADM50GU10

ADM50GU10/SG

|              |      |         |      |
|--------------|------|---------|------|
| ADM50GU10    | GU10 | 2 x 50W | ● B  |
| ADM50GU10/SG | GU10 | 2 x 50W | ● SG |

# Tandem



**IP**  
**55**


**CE**



  
**GU10 LED**

  
**GU10 Halogen**

**AL**




**ATA2X50**

**GU10**

**2 x 50W**




# Riola

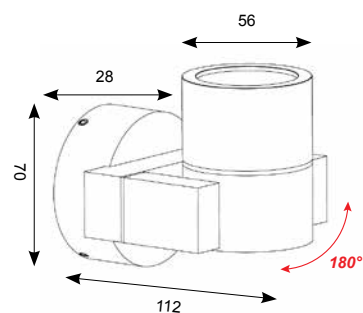

ARGU10

GU10

35W

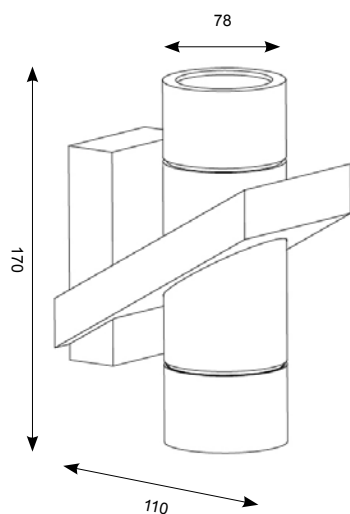

ACO2X35

GU10

2 x 35W

## Antila LED

236



**IP**  
**54**




**L70**  
**30,000**

**90°**



**DCA**

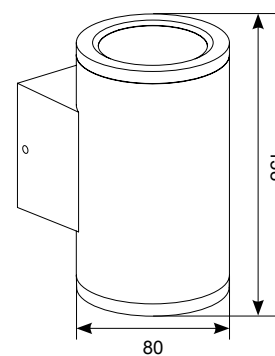


**ANTIALED**


**LED**

**12W 4000K**

|             |                      |
|-------------|----------------------|
| <b>W</b>    | <b>12W</b>           |
| <b>Lm/D</b> | <b>406lm</b>         |
| <b>Lm/W</b> | <b>37lm</b>          |
| <b>CRI</b>  | <b>Ra 80</b>         |
| <b>CCT</b>  | <b>4000K</b>         |
| <b>V</b>    | <b>230V</b>          |
| <b>Hz</b>   | <b>50Hz</b>          |
| <b>Temp</b> | <b>-20°C to 50°C</b> |



DCA

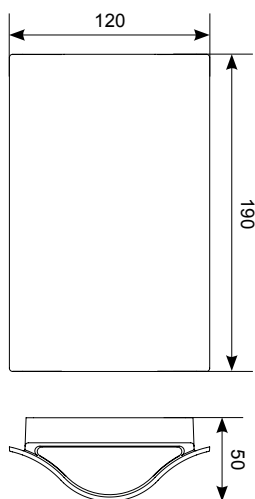

|      |               |
|------|---------------|
| W    | 12W           |
| Lm/D | 491lm         |
| Lm/W | 41lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 230V          |
| Hz   | 50Hz          |
| Temp | -20°C to 50°C |




AZATLED

LED

12W 4000K



# Segano LED






ASEGLED

LED

13W 4000K

|      |               |
|------|---------------|
| W    | 13W           |
| Lm/D | 610lm         |
| Lm/W | 47lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 230V          |
| Hz   | 50Hz          |
| Temp | -20°C to 50°C |




|      |               |
|------|---------------|
| W    | 11W           |
| Lm/D | 202lm         |
| Lm/W | 18lm          |
| CRI  | Ra 93         |
| CCT  | 4000K         |
| V    | 100V-240V     |
| Hz   | 50-60Hz       |
| Temp | -20°C to 40°C |



AGLED/WL LED 11W 4000K

## Brock LED Wall Light



|             |               |
|-------------|---------------|
| <i>W</i>    | 7.7W          |
| <i>Lm/D</i> |               |
| 4000K       | 452lm         |
| 3000K       | 448lm         |
| <i>Lm/W</i> |               |
| 4000K       | 57lm          |
| 3000K       | 56lm          |
| <i>CRI</i>  | Ra 80         |
| <i>CCT</i>  | 4000K         |
|             | 3000K         |
| <i>V</i>    | 230V          |
| <i>Hz</i>   | 50Hz          |
| <i>Temp</i> | -20°C to 25°C |



|              |     |              |
|--------------|-----|--------------|
| ABRLED/WL/CW | LED | 7.7W - 4000K |
| ABRLED/WL/WW | LED | 7.7W - 3000K |



## Duo Midi LED



ADMLED1/GR/CW

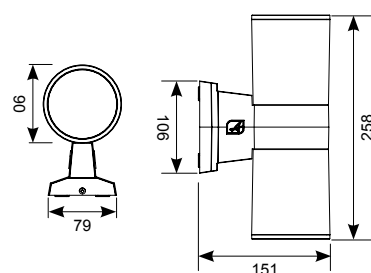

|               |     |           |      |
|---------------|-----|-----------|------|
| ADMLED1/GR/CW | LED | 19W 4000K | ● GR |
| ADMLED2/GR/CW | LED | 42W 4000K | ● GR |



|          |               |
|----------|---------------|
| W        | 19W<br>42W    |
| Lm/D     |               |
| 19W      | 1752lm        |
| 42W      | 3582lm        |
| Lm/W 19W | 92lm          |
| Lm/W 42W | 85lm          |
| CRI      | Ra 80         |
| CCT      | 4000K         |
| V        | 220V-240V     |
| Hz       | 50-60Hz       |
| Temp     | -20°C to 25°C |













|      |               |
|------|---------------|
| W    | 34W           |
| Lm/D | 2 x 848lm     |
| Lm/W | 50lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 100V-240V     |
| Hz   | 50-60Hz       |
| Temp | -20°C to 40°C |

|          |     |           |
|----------|-----|-----------|
| ADOLEDWL | LED | 34W 4000K |
|----------|-----|-----------|







## Doppio HP LED

246



ADOLEDWL/HP LED 56.3W 4000K

|      |               |
|------|---------------|
| W    | 56.3W         |
| Lm/D | 2x2573lm      |
| Lm/W | 91lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 120V-240V     |
| Hz   | 50-60Hz       |
| Temp | -20°C to 40°C |

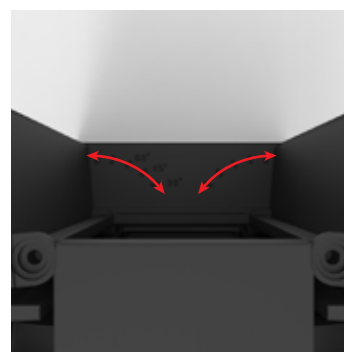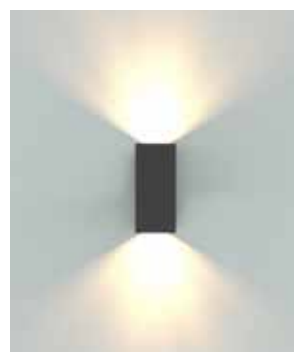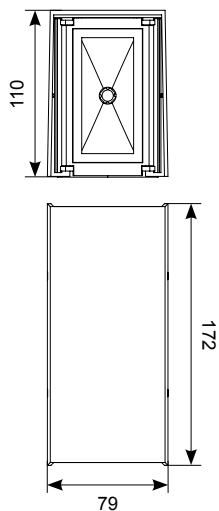

Ajuste independiente del ángulo del haz

|      |               |
|------|---------------|
| W    | 6W            |
| Lm/D | 205lm         |
| Lm/W | 34lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 230V          |
| Hz   | 50Hz          |
| Temp | -10°C to 50°C |

ALTOLED

LED


6W 4000K

# Eclipse MultiLED

248





AECLED/CH

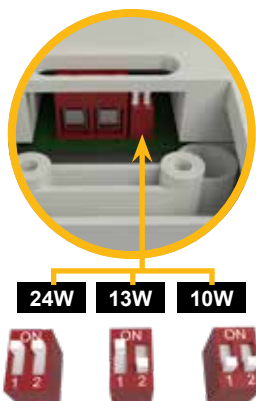

AECLED/W



AECLED/SC



|           |     |                   |    |
|-----------|-----|-------------------|----|
| AECLED/W  | LED | 10W/13W/24W 4000K | W  |
| AECLED/CH | LED | 10W/13W/24W 4000K | CH |
| AECLED/SC | LED | 10W/13W/24W 4000K | SC |

|              |     |                   |    |
|--------------|-----|-------------------|----|
| AECLED/WW/W  | LED | 10W/13W/24W 3000K | W  |
| AECLED/WW/CH | LED | 10W/13W/24W 3000K | CH |
| AECLED/WW/SC | LED | 10W/13W/24W 3000K | SC |

|      |  |                              |
|------|--|------------------------------|
| /M3  |  |                              |
| /DD  |  | (DD1/DD2/DD3/DD4 - 24W only) |
| /MWS |  |                              |

| W        | 10W/13W/24W    |        |
|----------|----------------|--------|
| Lm/D     | 4000K          | 3000K  |
| 10W      | 1107lm         | 1041lm |
| 13W      | 1400lm         | 1315lm |
| 24W      | 2695lm         | 2521lm |
| Lm/W 10W | 111lm          | 104lm  |
| Lm/W 13W | 108lm          | 101lm  |
| Lm/W 24W | 104lm          | 97lm   |
| CRI      | Ra 80          |        |
| CCT      | 4000K<br>3000K |        |
| V        | 230V           |        |
| Hz       | 50/60Hz        |        |
| Temp     | -10°C to 25°C  |        |



# Mercury CCT LED

250




AMERLED/CCT

Powered by  
**TRIDONIC**  
enlightening your ideas



AMERLED/CCT + AMERLEDBZ/CH

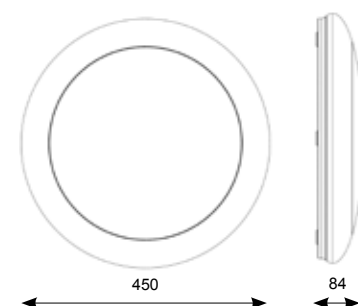

|             |     |                 |  |
|-------------|-----|-----------------|--|
| AMERLED/CCT | LED | 19W 3000K/4000K |  |
| AMERLED/HP  | LED | 33W 4000K       |  |



|       |  |               |
|-------|--|---------------|
| /M3   |  |               |
| /OCTO |  |               |
| /DD   |  | (DD1/DD2/DD3) |
| /MWS  |  |               |

Acesorios

|              |  |    |
|--------------|--|----|
| AMERLEDBZ/CH |  | CH |
|--------------|--|----|

|          |               |        |
|----------|---------------|--------|
| W        | 19W           | 33W    |
| Lm/D     | 4000K         | 3000K  |
| 19W      | 1655lm        | 1420lm |
| 33W      | N/A           | 2702lm |
| Lm/W 19W | 87lm          | 71lm   |
| Lm/W 33W | N/A           | 82lm   |
| CRI      | Ra 80         |        |
| CCT      | 4000K         | 3000K  |
| V        | 230V          |        |
| Hz       | 50/60Hz       |        |
| Temp     | -10°C to 40°C |        |





|      |             |
|------|-------------|
| W    | 5W          |
| Lm/D | 436lm       |
| Lm/W | 87lm        |
| CRI  | Ra 70       |
| CCT  | 4000K       |
| V    | 220V-240V   |
| Hz   | 50Hz        |
| Temp | 0°C to 25°C |

|           |     |          |
|-----------|-----|----------|
| ABELED/WV | LED | 5W 4000K |
|-----------|-----|----------|



# Gamma Mini LED



AMGAMLED



AMGAMLED + AMGAMLEDBZ/CH





50mm

|             |     |           |
|-------------|-----|-----------|
| AMGAMLED    | LED | 11W 4000K |
| AMGAMLED/WW | LED | 11W 3000K |


|      |                                                                                     |
|------|-------------------------------------------------------------------------------------|
| /M3  |  |
| /MWS |  |

## Acesorios

|               |                                                                                     |    |
|---------------|-------------------------------------------------------------------------------------|----|
| AMGAMLEDBZ/CH |  | CH |
|---------------|-------------------------------------------------------------------------------------|----|



|            |              |
|------------|--------------|
| W          | 11W          |
| Lm/D       |              |
| 4000K      | 1031lm       |
| 3000K      | 971lm        |
| Lm/W 4000K | 94lm         |
| Lm/W 3000K | 88lm         |
| CRI        | Ra 80        |
| CCT        | 4000K        |
|            | 3000K        |
| V          | 230V         |
| Hz         | 50Hz         |
| Temp       | -5°C to 35°C |



AGAMLED



AGAMLED + AGAMLEDBZ/CH



|            |              |
|------------|--------------|
| W          | 18W          |
| Lm/D       |              |
| 4000K      | 1675lm       |
| 3000K      | 1551lm       |
| Lm/W 4000K | 93lm         |
| Lm/W 3000K | 86lm         |
| CRI        | Ra 80        |
| CCT        | 4000K        |
|            | 3000K        |
| V          | 220V-230V    |
| Hz         | 50Hz         |
| Temp       | -5°C to 35°C |

|            |     |           |
|------------|-----|-----------|
| AGAMLED    | LED | 18W 4000K |
| AGAMLED/WW | LED | 18W 3000K |

|      |  |
|------|--|
| /M3  |  |
| /MWS |  |

## Acesorios

|              |  |    |
|--------------|--|----|
| AGAMLEDBZ/CH |  | CH |
|--------------|--|----|

# Jazz LED



254



AJALED



AJALED + AJALED BZ/CH



|        |     |           |
|--------|-----|-----------|
| AJALED | LED | 14W 4000K |
|--------|-----|-----------|

|            |  |
|------------|--|
| /M3        |  |
| /MWS       |  |
| /MWS/M3/CF |  |

Acesorios





|              |    |
|--------------|----|
| AJALED BZ/CH | CH |
|--------------|----|

|      |             |
|------|-------------|
| W    | 14W         |
| Lm/D | 993lm       |
| Lm/W | 66lm        |
| CRI  | Ra 80       |
| CCT  | 4000K       |
| V    | 220V-240V   |
| Hz   | 50-60Hz     |
| Temp | 0°C to 25°C |



# Disco Slim LED CCT

Supplied c/w Integral Driver

255



ADSILED1/CCT



ADSILED2/CCT



ADSILED1/CCT

IP65



ADSILED1/CCT +  
ADSILED1BZ/CH



ADSILED1/CCT +  
ADSILED1BZ/GR

4000K 3000K

|      |               |        |
|------|---------------|--------|
| W    | 7W            | 13W    |
| Lm/D | 643lm         | 575lm  |
|      | 1083lm        | 1027lm |
| Lm/W | 92lm          | 82lm   |
|      | 83lm          | 79lm   |
| CRI  | Ra 80         |        |
| CCT  | 4000K         |        |
|      | 3000K         |        |
| V    | 230V          |        |
| Hz   | 50Hz          |        |
| Temp | -10°C to 25°C |        |

|              |     |                   |
|--------------|-----|-------------------|
| ADSILED1/CCT | LED | 7W - 4000K/3000K  |
| ADSILED2/CCT | LED | 13W - 4000K/3000K |

|      |  |            |
|------|--|------------|
| /M3  |  | (13W only) |
| /MWS |  | (13W only) |

## Acesorios

|               |  |    |       |
|---------------|--|----|-------|
| ADSILED1BZ/CH |  | CH | (8W)  |
| ADSILED1BZ/GR |  | GR | (8W)  |
| ADSILED2BZ/CH |  | CH | (13W) |
| ADSILED2BZ/GR |  | GR | (13W) |



# Disco Slim LED

256



ADSILED2



ADSILED1 + ADSILED/1BZ/CH



ADSILED1 + ADSILED/1BZ/GR



|                    |     |          |
|--------------------|-----|----------|
| <b>ADSILED1</b>    | LED | 8W 4000K |
| <b>ADSILED1/WW</b> | LED | 8W 3000K |

|                    |     |           |
|--------------------|-----|-----------|
| <b>ADSILED2</b>    | LED | 13W 4000K |
| <b>ADSILED2/WW</b> | LED | 13W 3000K |


|                   |  |            |
|-------------------|--|------------|
| <b>/M3</b>        |  | (13W only) |
| <b>/MWS</b>       |  | (13W only) |
| <b>/MWS/M3/CF</b> |  | (13W only) |

## Acesorios

|                       |  |           |       |
|-----------------------|--|-----------|-------|
| <b>ADSILED/1BZ/CH</b> |  | <b>CH</b> | (8W)  |
| <b>ADSILED/1BZ/GR</b> |  | <b>GR</b> | (8W)  |
| <b>ADSILED/2BZ/CH</b> |  | <b>CH</b> | (13W) |
| <b>ADSILED/2BZ/GR</b> |  | <b>GR</b> | (13W) |



ADSILED1




ADSILED2


|             | 4000K         | 3000K |
|-------------|---------------|-------|
| <b>W</b>    | 8W            | 13W   |
| <b>Lm/D</b> | 584lm         | 547lm |
|             | 1021lm        | 979lm |
| <b>Lm/W</b> | 73lm          | 68lm  |
|             | 79lm          | 75lm  |
| <b>CRI</b>  | Ra 80         |       |
| <b>CCT</b>  | 4000K         |       |
|             | 3000K         |       |
| <b>V</b>    | 220V-240V     |       |
| <b>Hz</b>   | 50Hz          |       |
| <b>Temp</b> | -10°C to 25°C |       |

# Disco Slim Halo LED

257



ADSIHLED1



ADSIHLED2

4000K 3000K

|      |               |        |
|------|---------------|--------|
| W    | 8W            | 13W    |
| Lm/D | 687lm         | 605lm  |
|      | 1198lm        | 1064lm |
| Lm/W | 86lm          | 87lm   |
|      | 92lm          | 82lm   |
| CRI  | Ra 80         |        |
| CCT  | 4000K         |        |
|      | 3000K         |        |
| V    | 220V-240V     |        |
| Hz   | 50Hz          |        |
| Temp | -10°C to 25°C |        |



ADSIHLED2



ADSIHLED1 + ADSILED/1BZ/CH



ADSIHLED1 + ADSILED/1BZ/GR

|              |     |          |
|--------------|-----|----------|
| ADSIHLED1    | LED | 8W 4000K |
| ADSIHLED1/WW | LED | 8W 3000K |

|              |     |           |
|--------------|-----|-----------|
| ADSIHLED2    | LED | 13W 4000K |
| ADSIHLED2/WW | LED | 13W 3000K |

|            |  |            |
|------------|--|------------|
| /M3        |  | (13W only) |
| /MWS       |  | (13W only) |
| /MWS/M3/CF |  | (13W only) |

## Acesorios

|                |  |       |
|----------------|--|-------|
| ADSILED/1BZ/CH |  | (8W)  |
| ADSILED/1BZ/GR |  | (8W)  |
| ADSILED/2BZ/CH |  | (13W) |
| ADSILED/2BZ/GR |  | (13W) |





# Disco LED



ADILED1



ADILED2

|                |     |           |
|----------------|-----|-----------|
| <b>ADILED1</b> | LED | 8W 4000K  |
| <b>ADILED2</b> | LED | 14W 4000K |


|                   |  |            |
|-------------------|--|------------|
| <b>/M3</b>        |  | (14W only) |
| <b>/MWS</b>       |  | (14W only) |
| <b>/MWS/M3/CF</b> |  | (14W only) |

## Acesorios

|                   |  |           |       |
|-------------------|--|-----------|-------|
| <b>ADI28BZ/BR</b> |  | <b>BR</b> | (14W) |
| <b>ADI28BZ/CH</b> |  | <b>CH</b> | (14W) |
| <b>ADI28BZ/SG</b> |  | <b>SG</b> | (14W) |




275



ADILED1




326



ADILED2


|             |                |
|-------------|----------------|
| <b>W</b>    | 8W<br>14W      |
| <b>Lm/D</b> | 539lm<br>860lm |
| <b>Lm/W</b> | 67lm<br>61lm   |
| <b>CRI</b>  | Ra 70          |
| <b>CCT</b>  | 4000K          |
| <b>V</b>    | 220V-240V      |
| <b>Hz</b>   | 50-60Hz        |
| <b>Temp</b> | -10°C to 25°C  |



ADI28/HF




275



ADI16/HF



326



ADI28/HF



ADI28/HF + ADI28BZ/BR



ADI28/HF + ADI28BZ/CH



ADI28/HF + ADI28BZ/SG

|          |                                                                                     |       |
|----------|-------------------------------------------------------------------------------------|-------|
| ADI28/HF | TC-DD                                                                               | 28W   |
| /M3      |  | (28W) |

## Acesorios

|            |                                                                                     |    |       |
|------------|-------------------------------------------------------------------------------------|----|-------|
| ADI28BZ/BR |  | BR | (28W) |
| ADI28BZ/CH |  | CH | (28W) |
| ADI28BZ/SG |  | SG | (28W) |

# Astro LED

260





AALED1/BV




AALED1/WV



AALED2/WV



AALED1





AALED2

|           |     |          |      |
|-----------|-----|----------|------|
| AALED1/BV | LED | 7W 4000K | ● BV |
| AALED1/WV | LED | 7W 4000K | ● WV |


|           |     |           |      |
|-----------|-----|-----------|------|
| AALED2/BV | LED | 14W 4000K | ● BV |
| AALED2/WV | LED | 14W 4000K | ● WV |

|      |  |                           |
|------|--|---------------------------|
| /PC  |  |                           |
| /M3  |  | (14W)                     |
| /MWS |  | (14W standard model only) |

|      |               |
|------|---------------|
| W    | 7W            |
|      | 14W           |
| Lm/D |               |
| 7W   | 628lm         |
| 14W  | 1220lm        |
| Lm/W | 89lm          |
|      | 87lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 220V-240V     |
| Hz   | 50Hz          |
| Temp | -10°C to 25°C |



AALED1



AALED2

|      |               |
|------|---------------|
| W    | 6W            |
|      | 14W           |
| Lm/D |               |
| 6W   | 661lm         |
| 14W  | 1208lm        |
| Lm/W | 110lm         |
|      | 86lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 220V-240V     |
| Hz   | 50Hz          |
| Temp | -10°C to 25°C |



ADLED1/BV



ADLED1/WV



ADLED2/BV + ADLED2/BZ/GRILL/B



ADLED2/BV + ADLED2/BZ/EYE/B

|           |     |          |      |
|-----------|-----|----------|------|
| ADLED1/BV | LED | 6W 4000K | ● BV |
| ADLED1/WV | LED | 6W 4000K | ● WV |

|           |     |           |      |
|-----------|-----|-----------|------|
| ADLED2/BV | LED | 14W 4000K | ● BV |
| ADLED2/WV | LED | 14W 4000K | ● WV |

|      |  |                           |
|------|--|---------------------------|
| /PC  |  |                           |
| /M3  |  | (14W only)                |
| /MWS |  | (14W standard model only) |

## Acesorios

|                   |     |            |
|-------------------|-----|------------|
| ADLED2/BZ/EYE/B   | ● B | (14W Only) |
| ADLED2/BZ/EYE/W   | ● W | (14W Only) |
| ADLED2/BZ/GRILL/B | ● B | (14W Only) |
| ADLED2/BZ/GRILL/W | ● W | (14W Only) |


# Delta CFL




AD16/WP/HF



AD28/BP/HF



AD16



AD28



|            |       |     |      |
|------------|-------|-----|------|
| AD16/BP/HF | TC-DD | 16W | ● BP |
| AD16/VO/HF | TC-DD | 16W | ● VO |
| AD16/WP/HF | TC-DD | 16W | ● WP |

|            |       |     |      |
|------------|-------|-----|------|
| AD28/BP/HF | TC-DD | 28W | ● BP |
| AD28/VO/HF | TC-DD | 28W | ● VO |
| AD28/WP/HF | TC-DD | 28W | ● WP |

/M3  (28W)



8m  
8 sec - 5mins  
2 - 2000 LUX



AVIMLED/GR/PIR



AVIMLED/SG/PIR



AVIMLED/W

|            |     |          |    |
|------------|-----|----------|----|
| AVIMLED/GR | LED | 9W 4000K | GR |
| AVIMLED/SG | LED | 9W 4000K | SG |
| AVIMLED/W  | LED | 9W 4000K | W  |

|     |                |     |          |    |
|-----|----------------|-----|----------|----|
| PIR | AVIMLED/GR/PIR | LED | 9W 4000K | GR |
|     | AVIMLED/SG/PIR | LED | 9W 4000K | SG |
|     | AVIMLED/W/PIR  | LED | 9W 4000K | W  |

|     |    |
|-----|----|
| /PC | PC |
|-----|----|

|      |               |
|------|---------------|
| W    | 9W            |
| Lm/D | 797lm         |
| Lm/W | 89lm*         |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 230V          |
| Hz   | 50/60Hz       |
| Temp | -10°C to 50°C |



# Vision 3 CCT LED



AVILED/CCT/GR

Powered by  
**TRIDONIC**  
▼ enlightening your ideas



AVILED/CCT/SG





AVILED/CCT/W



ZONE 2



8 sec - 5mins  
2 - 2000 LUX



|               |     |                 |    |
|---------------|-----|-----------------|----|
| AVILED/CCT/GR | LED | 17W 4000K/3000K | GR |
| AVILED/CCT/SG | LED | 17W 4000K/3000K | SG |
| AVILED/CCT/W  | LED | 17W 4000K/3000K | W  |



|                   |     |                 |    |
|-------------------|-----|-----------------|----|
| AVILED/CCT/GR/PIR | LED | 17W 4000K/3000K | GR |
| AVILED/CCT/SG/PIR | LED | 17W 4000K/3000K | SG |
| AVILED/CCT/W/PIR  | LED | 17W 4000K/3000K | W  |

/PC



/M3



/MWS




|            |               |
|------------|---------------|
| W          | 17W           |
| Lm/D       |               |
| 4000K      | 1420lm        |
| 3000K      | 1324lm        |
| Lm/W 4000K | 84lm*         |
| Lm/W 3000K | 83lm*         |
| CRI        | Ra 80         |
| CCT        | 4000K         |
|            | 3000K         |
| V          | 230V          |
| Hz         | 50/60Hz       |
| Temp       | -10°C to 40°C |





# Vision 3 HP LED



Powered by  
**TRIDONIC**  
▼ enlightening your ideas





AVILED/SG



AVILED/W

|              |     |           |    |
|--------------|-----|-----------|----|
| AVILED/HP/GR | LED | 31W 4000K | GR |
| AVILED/HP/SG | LED | 31W 4000K | SG |
| AVILED/HP/W  | LED | 31W 4000K | W  |

|      |  |
|------|--|
| /PC  |  |
| /M3  |  |
| /MWS |  |



|      |               |
|------|---------------|
| W    | 31W           |
| Lm/D | 2426lm        |
| Lm/W | 78lm*         |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 220V-240V     |
| Hz   | 50-60Hz       |
| Temp | -10°C to 50°C |





# Topaz LED



ATOPLED/B



ATOPLED/W

**IP**  
**65**

**CE**




**8W**  
**LED** = **18W**  
**PLC**

**L70**  
**56,000**

**DIM**

**POLY**




|                  |     |          |                                                                                              |
|------------------|-----|----------|----------------------------------------------------------------------------------------------|
| <b>ATOPLED/B</b> | LED | 8W 4000K |  <b>B</b> |
| <b>ATOPLED/W</b> | LED | 8W 4000K |  <b>W</b> |


|             |             |
|-------------|-------------|
| <b>W</b>    | 8W          |
| <b>Lm/D</b> | 439lm       |
| <b>Lm/W</b> | 55lm        |
| <b>CRI</b>  | Ra 80       |
| <b>CCT</b>  | 4000K       |
| <b>V</b>    | 220V-240V   |
| <b>Hz</b>   | 50-60Hz     |
| <b>Temp</b> | 0°C to 25°C |

# Helder LED Circular Bulkhead

269



10m  
10 sec - 5mins  
10 - 2000 LUX



AHELED/CB



AHELED/CW/PIR



AHELED/EB

|          |               |
|----------|---------------|
| W        | 14W           |
| Lm/D     |               |
| Standard | 972lm         |
| Eyelid   | 529lm         |
| Lm/W     |               |
| Standard | 70lm          |
| Eyelid   | 38lm          |
| CRI      | Ra 80         |
| CCT      | 4000K         |
| V        | 220-240V      |
| Hz       | 50/60Hz       |
| Temp     | -20°C to 40°C |

|           |     |             |     |
|-----------|-----|-------------|-----|
| AHELED/CB | LED | 14W - 4000K | ● B |
| AHELED/CW | LED | 14W - 4000K | ● W |

|               |     |             |     |
|---------------|-----|-------------|-----|
| AHELED/CB/PIR | LED | 14W - 4000K | ● B |
| AHELED/CW/PIR | LED | 14W - 4000K | ● W |

|           |     |             |     |
|-----------|-----|-------------|-----|
| AHELED/EB | LED | 14W - 4000K | ● B |
| AHELED/EW | LED | 14W - 4000K | ● W |

|               |     |             |     |
|---------------|-----|-------------|-----|
| AHELED/EB/PIR | LED | 14W - 4000K | ● B |
| AHELED/EW/PIR | LED | 14W - 4000K | ● W |




# Helder LED Oval Bulkhead





AHELED/OW/PIR



AHELED/O/B





10m  
10 sec - 5mins  
10 - 2000 LUX



|  |               |     |             |     |
|--|---------------|-----|-------------|-----|
|  | AHELED/OB     | LED | 14W - 4000K | ● B |
|  | AHELED/OW     | LED | 14W - 4000K | ● W |
|  | AHELED/OB/PIR | LED | 14W - 4000K | ● B |
|  | AHELED/OW/PIR | LED | 14W - 4000K | ● W |

|      |               |
|------|---------------|
| W    | 14W           |
| Lm/D | 887lm         |
| Lm/W | 63lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 220-240V      |
| Hz   | 50/60Hz       |
| Temp | -20°C to 40°C |

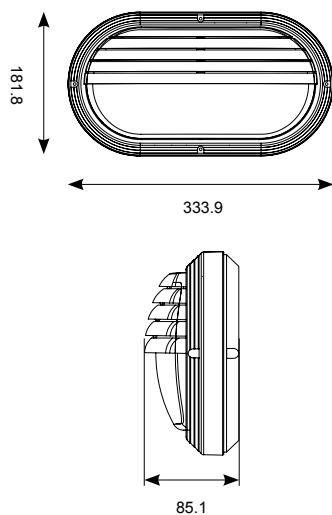

ASR2LED/W



ASR2LED/B



ASR2LED/B





ASR2LED/W

|      |             |
|------|-------------|
| W    | 8W          |
| Lm/D | 634lm       |
| Lm/W | 79lm        |
| CRI  | Ra 80       |
| CCT  | 4000K       |
| V    | 220V-240V   |
| Hz   | 50-60Hz     |
| Temp | 0°C to 25°C |

|           |     |          |     |
|-----------|-----|----------|-----|
| ASR2LED/B | LED | 8W 4000K | ● B |
| ASR2LED/W | LED | 8W 4000K | ● W |



# Sleek LED Polycarbonate Bulkhead

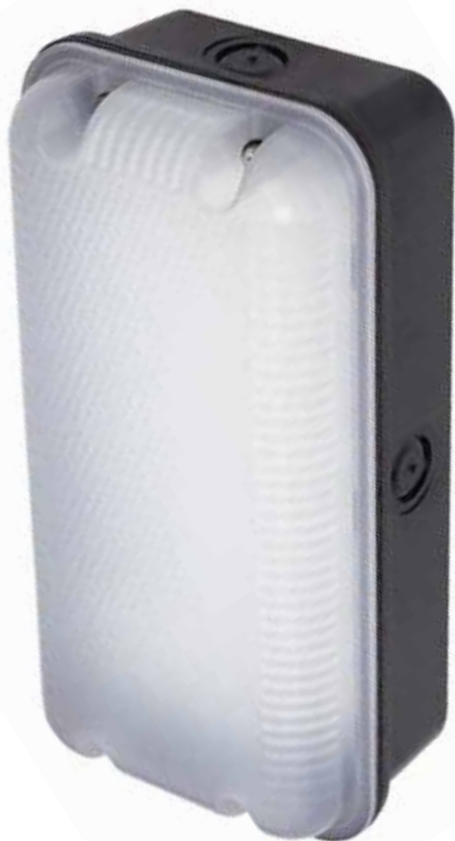

|        |     |          |
|--------|-----|----------|
| ASBLED | LED | 6W 4000K |
|--------|-----|----------|




|      |  |
|------|--|
| /PC  |  |
| /MWS |  |

|      |               |
|------|---------------|
| W    | 6W            |
| Lm/D | 440lm         |
| Lm/W | 73lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 220V-240V     |
| Hz   | 50Hz          |
| Temp | -10°C to 40°C |

# Sleek LED 110V Polycarbonate Bulkhead



273



ASLED/DIFF/RED

|      |               |
|------|---------------|
| W    | 5W            |
| Lm/D | 424lm         |
| Lm/W | 85lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 110V          |
| Hz   | 50Hz          |
| Temp | -10°C to 40°C |

|             |     |    |  |
|-------------|-----|----|--|
| ASBLED/110V | LED | 5W |  |
|-------------|-----|----|--|

|      |  |
|------|--|
| /PC  |  |
| /MWS |  |

Acesorios

|                 |  |  |
|-----------------|--|--|
| ASBLED/DIFF/RED |  |  |
|-----------------|--|--|




# E27 Aluminium Bulkhead



A100PC



A100GC



|        |     |        |      |
|--------|-----|--------|------|
| A100PC | E27 | 100W - | POLY |
| A100GC | E27 | 100W - | GLA  |


|     |    |
|-----|----|
| /PC | PC |
|-----|----|

| E27 Options              |     |     |  |
|--------------------------|-----|-----|--|
| 100W                     | 23W | 20W |  |
|                          |     |     |  |
| 130                      | 53  | 53  |  |
| Maximum size and wattage |     |     |  |

E27 Polycarbonate Bulkhead



275



| E27 Options              |     |     |  |
|--------------------------|-----|-----|--|
| 100W                     | 23W | 20W |  |
|                          |     |     |  |
| 130                      | 53  | 53  |  |
| 130                      | 130 | 130 |  |
| Maximum size and wattage |     |     |  |

A100POLY


E27

100W - ● B

/PC



# Camini LED

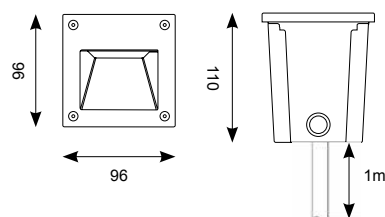


ACSQLEDWL

LED

3W 4000K

|      |               |
|------|---------------|
| W    | 3W            |
| Lm/D | 79lm          |
| Lm/W | 22lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 100V-240V     |
| Hz   | 50-60Hz       |
| Temp | -20°C to 25°C |

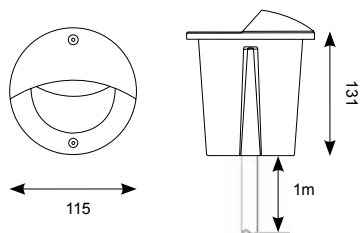

|      |               |
|------|---------------|
| W    | 3W            |
| Lm/D | 178lm         |
| Lm/W | 45lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 100V-240V     |
| Hz   | 50-60Hz       |
| Temp | -20°C to 25°C |

APCLEDWL



LED

3W 4000K










ALIBLED/BLU



ALIBLED/WHI

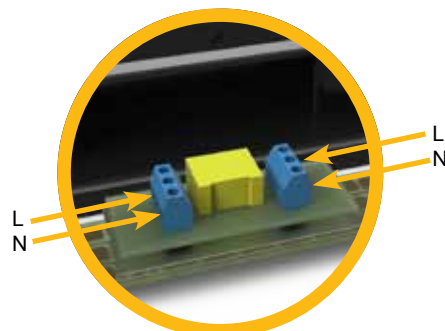

|            |               |
|------------|---------------|
| W          | 2W            |
| Lm/D       |               |
| 4000K      | 126lm         |
| Blue       | 48lm          |
| Lm/W 4000K | 63lm          |
| Lm/W Blue  | 24lm          |
| CRI 4000K  | Ra 65         |
| CCT        | 6000K         |
| V          | 220V-240V     |
| Hz         | 50Hz          |
| Temp       | -10°C to 25°C |

|             |     |          |
|-------------|-----|----------|
| ALIBLED/WHI | LED | 2W 4000K |
| ALIBLED/BLU | LED | 2W Blue  |

# Fidenza LED Bricklight




AFBILLED



AFBILLED + AFBL/GRILL



AFBILLED + AFBL/EYE



|                 |     |            |
|-----------------|-----|------------|
| <b>AFBILLED</b> | LED | 2.2W 4000K |
|-----------------|-----|------------|

## Accesorios

|                   |                    |
|-------------------|--------------------|
| <b>AFBL/GRILL</b> | Front Grill Cover  |
| <b>AFBL/EYE</b>   | Front Eyelid Cover |

|             |               |
|-------------|---------------|
| <b>W</b>    | 2.2W          |
| <b>Lm/D</b> | 145lm         |
| <b>Lm/W</b> | 66lm          |
| <b>CRI</b>  | Ra 65         |
| <b>CCT</b>  | 4000K         |
| <b>V</b>    | 100V-240V     |
| <b>Hz</b>   | 50-60Hz       |
| <b>Temp</b> | -20°C to 40°C |





# Volant LED



**IP**  
**54**

**CE**





**L70**  
**30,000**

**DIM**

**DCA**

**GLA**



**AVOLED5WL**

**LED**

**7W 4000K**

|             |                      |
|-------------|----------------------|
| <b>W</b>    | <b>7W</b>            |
| <b>Lm/D</b> | <b>302lm</b>         |
| <b>Lm/W</b> | <b>43lm</b>          |
| <b>CRI</b>  | <b>Ra 80</b>         |
| <b>CCT</b>  | <b>4000K</b>         |
| <b>V</b>    | <b>230V</b>          |
| <b>Hz</b>   | <b>50Hz</b>          |
| <b>Temp</b> | <b>-10°C to 50°C</b> |






IP  
44

CE



DCA

GLA



ACAL/E27

E27

40W




# Latina LED Half Lantern



ALHLLD/BL



ALHLLD/PIR/W



|           |     |          |      |
|-----------|-----|----------|------|
| ALHLLD/BL | LED | 8W 3000K | ● BL |
| ALHLLD/WH | LED | 8W 3000K | ● WH |

|              |     |          |      |
|--------------|-----|----------|------|
| ALHLLD/PC/BL | LED | 8W 3000K | ● BL |
| ALHLLD/PC/WH | LED | 8W 3000K | ● WH |

|               |     |          |      |
|---------------|-----|----------|------|
| ALHLLD/PIR/BL | LED | 8W 3000K | ● BL |
| ALHLLD/PIR/WH | LED | 8W 3000K | ● WH |

|      |               |
|------|---------------|
| W    | 8W            |
| Lm/D | 400lm         |
| Lm/W | 53lm          |
| CRI  | Ra 80         |
| CCT  | 3000K         |
| V    | 230V          |
| Hz   | 50/60Hz       |
| Temp | -10°C to 40°C |


# Latina Polycarbonate Half Lantern



285




4 - 8m  
5sec - 5min  
30 LUX



ALHL/BL



ALHL/PIR/WH



|             |     |     |  |    |
|-------------|-----|-----|--|----|
| ALHL/BL     | E27 | 42W |  | BL |
| ALHL/WH     | E27 | 42W |  | WH |
| ALHL/PC/BL  | E27 | 42W |  | BL |
| ALHL/PC/WH  | E27 | 42W |  | WH |
| ALHL/PIR/BL | E27 | 42W |  | BL |
| ALHL/PIR/WH | E27 | 42W |  | WH |



# Latina LED Wall Lantern



ALWLLED/PIR/BL



ALWLLED/WH




ALWL/CBB



ALWL/CBW



8m  
5sec - 5min  
3 LUX -  
Photocell Off



|            |     |          |      |
|------------|-----|----------|------|
| ALWLLED/BL | LED | 8W 3000K | ● BL |
| ALWLLED/WH | LED | 8W 3000K | ● WH |


|                |     |          |      |
|----------------|-----|----------|------|
| ALWLLED/PIR/BL | LED | 8W 3000K | ● BL |
| ALWLLED/PIR/WH | LED | 8W 3000K | ● WH |

## Acesorios

|          |                |      |
|----------|----------------|------|
| ALWL/CBB | Corner Bracket | ● BL |
| ALWL/CBW | Corner Bracket | ● WH |

|      |               |
|------|---------------|
| W    | 8W            |
| Lm/D | 546lm         |
| Lm/W | 68lm          |
| CRI  | Ra 80         |
| CCT  | 3000K         |
| V    | 230V          |
| Hz   | 50/60Hz       |
| Temp | -10°C to 40°C |

# Latina Polycarbonate Wall Lantern



287

**IP**  
**65**



**PIR**  
4 - 8m  
5sec - 5min  
30 LUX

**POLY**



ALWL/WH




ALWL/PIR/BL



ALWL/CBB



ALWL/CBW



| E27 Options              |     |
|--------------------------|-----|
| 42 W                     | 20W |
|                          |     |
|                          | 65  |
|                          | 140 |
| Maximum size and wattage |     |

|         |     |     |  |    |
|---------|-----|-----|--|----|
| ALWL/BL | E27 | 42W |  | BL |
| ALWL/WH | E27 | 42W |  | WH |

|             |     |     |  |  |    |
|-------------|-----|-----|--|--|----|
| ALWL/PIR/BL | E27 | 42W |  |  | BL |
| ALWL/PIR/WH | E27 | 42W |  |  | WH |

## Acesorios

|          |                |  |    |
|----------|----------------|--|----|
| ALWL/CBB | Corner Bracket |  | BL |
| ALWL/CBW | Corner Bracket |  | WH |








# Pavia Solar LED




289



6 - 10m  
1 min  
10 - 45 LUX

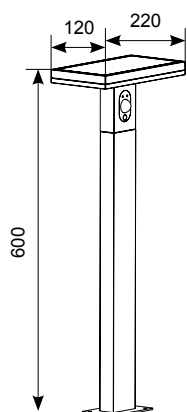

**Modos operativos**



**Funciona con energía solar**

|      |               |
|------|---------------|
| Lm/D | 230lm         |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| Temp | -20°C to 45°C |


|             |                                         |       |
|-------------|-----------------------------------------|-------|
| APAVLEDB/60 | LED                                     | 4000K |
| Bateria     |                                         |       |
| ASBP/17     | 7.4V 1500mAh Replacement Li-ION Battery |       |



# Talana Solar LED



**Modos operativos**




**Funciona con energía solar**



6 - 10m  
1 min  
10 - 45 LUX

**DCA**



ATASLEDB/60 LED 4000K

Batería

ASBP/17 7.4V 1500mAh Replacement Li-ION Battery

|      |               |
|------|---------------|
| Lm/D | 210lm         |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| Temp | -20°C to 45°C |










6 - 9m  
5 - 8 min  
10 - 2000 LUX

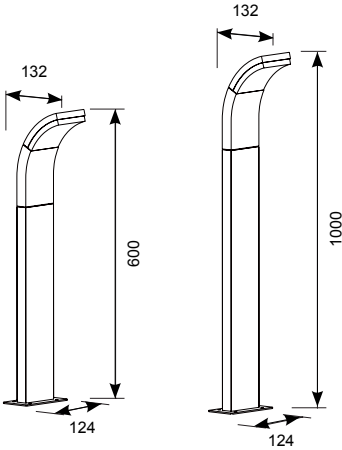

ASELEDB/060/PIR



ASELEDB/100

|      |               |
|------|---------------|
| W    | 6.5W          |
| Lm/D | 366lm         |
| Lm/W | 52lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 220V-240V     |
| Hz   | 50-60Hz       |
| Temp | -20°C to 45°C |

|                 |     |            |
|-----------------|-----|------------|
| ASELEDB/060     | LED | 6.5W 4000K |
| ASELEDB/100     | LED | 6.5W 4000K |
| ASELEDB/060/PIR | LED | 6.5W 4000K |
| ASELEDB/100/PIR | LED | 6.5W 4000K |

# Arco LED

294



AARLEDB/060



AARLEDB/100

**IP**  
**54**

**CE**




**L70**  
**36,000**

**DIM**

**DCA**



Arco LED Wall Light  
p222

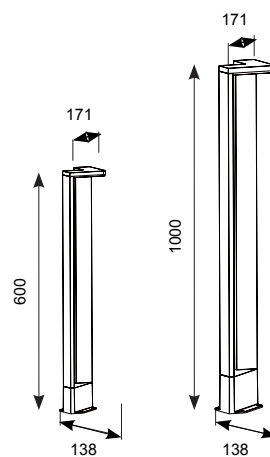

|                    |     |           |
|--------------------|-----|-----------|
| <b>AARLEDB/060</b> | LED | 11W 4000K |
|--------------------|-----|-----------|




|                    |     |           |
|--------------------|-----|-----------|
| <b>AARLEDB/100</b> | LED | 11W 4000K |
|--------------------|-----|-----------|

|      |               |
|------|---------------|
| W    | 11W           |
| Lm/D | 643lm         |
| Lm/W | 58lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 100V-240V     |
| Hz   | 50-60Hz       |
| Temp | -20°C to 45°C |







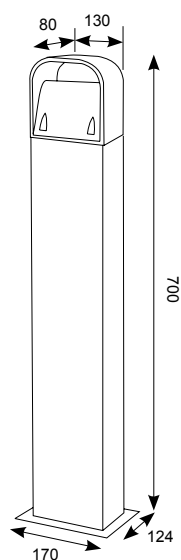

|      |               |
|------|---------------|
| W    | 11W           |
| Lm/D | 202lm         |
| Lm/W | 18lm          |
| CRI  | Ra 90         |
| CCT  | 4000K         |
| V    | 100V-240V     |
| Hz   | 50-60Hz       |
| Temp | -20°C to 40°C |



AGLEDB/700 LED 11W 4000K



# Brock LED Bollard



Kit de montaje de raíz  
c/w suministrado

**IP**  
**65**

**CE**




**L70**  
**50,000**

**DIM**

**DCA**



*Matching  
Brock LED Wall light  
see p240*

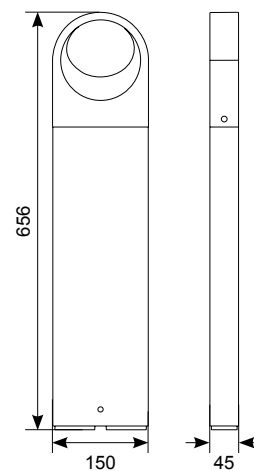

|             |                      |
|-------------|----------------------|
| <b>W</b>    | <b>7.7W</b>          |
| <b>Lm/D</b> |                      |
| 4000K       | 452lm                |
| 3000K       | 447lm                |
| <b>Lm/W</b> |                      |
| 4000K       | 57lm                 |
| 3000K       | 56lm                 |
| <b>CRI</b>  | <b>Ra 80</b>         |
| <b>CCT</b>  | 4000K                |
|             | 3000K                |
| <b>V</b>    | <b>230V</b>          |
| <b>Hz</b>   | <b>50Hz</b>          |
| <b>Temp</b> | <b>-20°C to 25°C</b> |

**ABRLEDB/650/CW** LED 7.7W - 4000K 650mm

**ABRLEDB/650/WW** LED 7.7W - 3000K 650mm



# Duet LED

300



ADULEDB/080



ADULEDB/080/PIR

**IP**  
**65**

**IP**  
**54**  
PIR




**L70**  
**36,000**

**DIM**



**PIR**  
12m  
8sec - 8min  
5 - 200 LUX

**DCA**

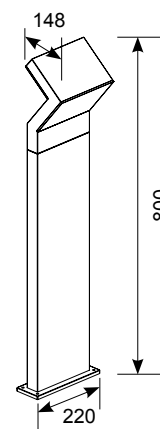

**ADULEDB/080** LED 17W 4000K






**ADULEDB/080/PIR** LED 17W 4000K 

|      |               |
|------|---------------|
| W    | 17W           |
| Lm/D | 1536lm        |
| Lm/W | 90lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 100V-240V     |
| Hz   | 50-60Hz       |
| Temp | -25°C to 45°C |







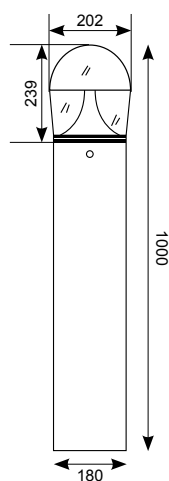

|      |               |
|------|---------------|
| W    | 26W           |
| Lm/D | 1379lm        |
| Lm/W | 53lm          |
| CRI  | Ra 70         |
| CCT  | 4000K         |
| V    | 100V-240V     |
| Hz   | 50-60Hz       |
| Temp | -25°C to 50°C |



|              |     |           |
|--------------|-----|-----------|
| ATALEDB/1000 | LED | 26W 4000K |
| /M3          |     |           |



# Leo CCT LED Polycarbonate Bollard

304




ALEOLED/CCT/045/GR



ALEOLED/CCT/075/GR



ALEOLED/CCT/100/GR

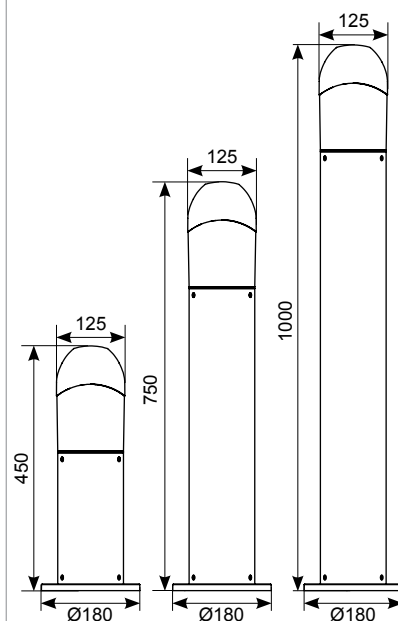


|             |               |       |     |
|-------------|---------------|-------|-----|
| <b>W</b>    | 8W            | 13W   | 13W |
| <b>Lm/D</b> | 3000K         | 4000K |     |
| 8W          | 592lm         | 533lm |     |
| 13W         | 922lm         | 880lm |     |
| 13W         | 922lm         | 880lm |     |
| <b>Lm/W</b> |               |       |     |
| 8W          | 74lm          | 67lm  |     |
| 13W         | 77lm          | 73lm  |     |
| 13W         | 77lm          | 73lm  |     |
| <b>CRI</b>  | Ra 80         |       |     |
| <b>CCT</b>  | 3000K         | 4000K |     |
| <b>V</b>    | 230V          |       |     |
| <b>Hz</b>   | 50/60Hz       |       |     |
| <b>Temp</b> | -10°C to 40°C |       |     |

|                    |     |                 |
|--------------------|-----|-----------------|
| ALEOLED/CCT/045/GR | LED | 8W 3000K/4000K  |
| ALEOLED/CCT/075/GR | LED | 13W 3000K/4000K |
| ALEOLED/CCT/100/GR | LED | 13W 3000K/4000K |



305



| E27 Options                                                                         |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 100 W                                                                               | 23W<br>53                                                                           | 20W<br>53                                                                           |
|  |  |  |
|                                                                                     | 165                                                                                 | 165                                                                                 |
| Maximum size and wattage                                                            |                                                                                     |                                                                                     |

|             |     |      |
|-------------|-----|------|
| ALIB/100E27 | E27 | 100W |
|-------------|-----|------|

# Orno LED Portable Lantern



AORNLED/PL1



AORNLED/PL2

**IP**  
**54**




**L70**  
**36,000**




**DCA**

**POLY**



AORNLED/PL1

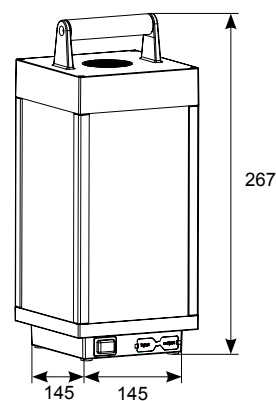

AORNLED/PL2

|                    |     |          |
|--------------------|-----|----------|
| <b>AORNLED/PL1</b> | LED | 5W 4000K |
| <b>AORNLED/PL2</b> | LED | 6W 4000K |

|             |               |
|-------------|---------------|
| <b>W</b>    | 5W            |
| <b>Lm/D</b> | 353lm         |
| <b>Lm/W</b> | 71lm          |
| <b>CRI</b>  | Ra 80         |
| <b>CCT</b>  | 4000K         |
|             | 3.7VDC        |
| <b>Temp</b> | -20°C to 45°C |













Rondo HP AC LED  
Surface/Spike Light



309

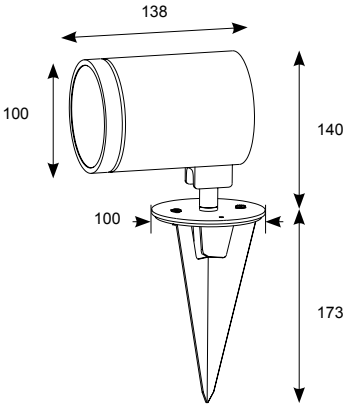

|      |               |
|------|---------------|
| W    | 20W           |
| Lm/D | 1200lm        |
| Lm/W | 60lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 220V-240V     |
| Hz   | 50-60Hz       |
| Temp | -20°C to 40°C |


AROLEDSSS LED 20W 4000K










# Meteor LED Submersible



311



|      |               |
|------|---------------|
| W    | 6W            |
| Lm/D | 547lm         |
| Lm/W | 91lm          |
| CRI  | Ra 75         |
| CCT  | 4000K         |
| V    | 350mA         |
| Temp | -20°C to 40°C |



| AMETLED              | LED                       | 6W 4000K |
|----------------------|---------------------------|----------|
| <i>Controladores</i> |                           |          |
| AD9W/350             | 9W 350mA LED Driver       |          |
| ADK20W/350           | 20W 350mA LED Driver      |          |
| AMCD25W              | 0-15W Multicurrent Driver |          |
| AMCD50W              | 0-20W Multicurrent Driver |          |



# Subra LED



## Inground Uplight



ASUWOLED/CW



ASUWOLED/WW



|             |     |          |
|-------------|-----|----------|
| ASUWOLED/CW | LED | 1W 4000K |
| ASUWOLED/WW | LED | 1W 3000K |

### Controladores

|            |                                  |
|------------|----------------------------------|
| ADK15W/24V | 15W 24V LED Driver               |
| ADK60W/24V | 60W 24V LED Driver               |
| AMCD25W    | 10 - 20W Multicurrent LED Driver |

|            |               |
|------------|---------------|
| W          | 1W            |
| Lm/D       |               |
| 4000K      | 35lm          |
| 3000K      | 35lm          |
| Lm/W 4000K | 35lm          |
| Lm/W 3000K | 35lm          |
| CRI 4000K  | Ra 75         |
| CRI 3000K  | Ra 80         |
| CCT 4000K  | 6000K         |
| CCT 3000K  | 3000K         |
| V          | 12V-24V       |
| Temp       | -20°C to 45°C |










# Turlock LED Inground Uplight



Powered by

**HEP**

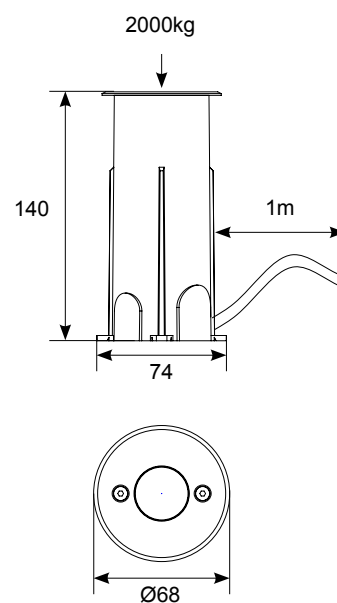

**ATURWOLED/70** LED 3W 4000K

|      |               |
|------|---------------|
| W    | 3W            |
| Lm/D | 135lm         |
| Lm/W | 45lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 230V          |
| Hz   | 50/60Hz       |
| Temp | -20°C to 25°C |





# Turlock LED Inground Uplight



Powered by

**HEP**

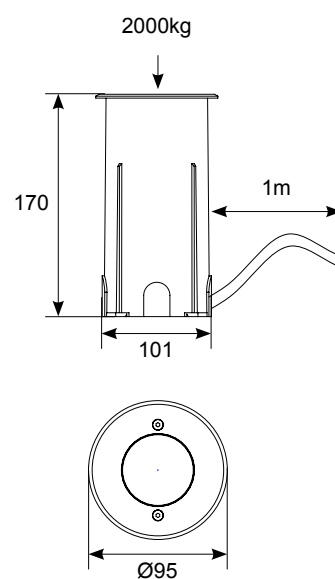


**ATURWOLED/95** LED 4W 4000K

|      |               |
|------|---------------|
| W    | 4W            |
| Lm/D | 390lm         |
| Lm/W | 97lm          |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 230V          |
| Hz   | 50/60Hz       |
| Temp | -20°C to 25°C |

# Turlock LED Inground Uplight




317



Powered by

HEP

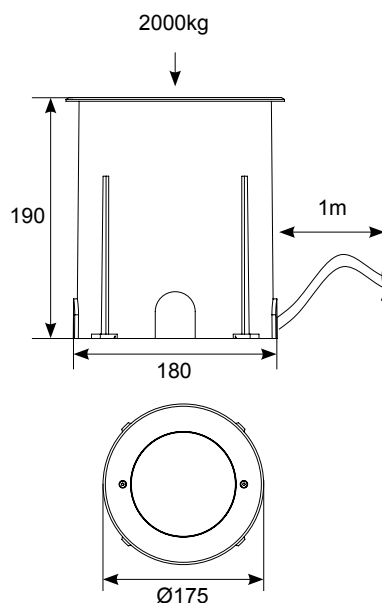

|      |               |
|------|---------------|
| W    | 8W            |
| Lm/D | 884lm         |
| Lm/W | 110lm         |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 230V          |
| Hz   | 50/60Hz       |
| Temp | -20°C to 25°C |

ATURWOLED/175 LED 8W 4000K






# Turlock LED Inground Uplight



Powered by

**HEP**

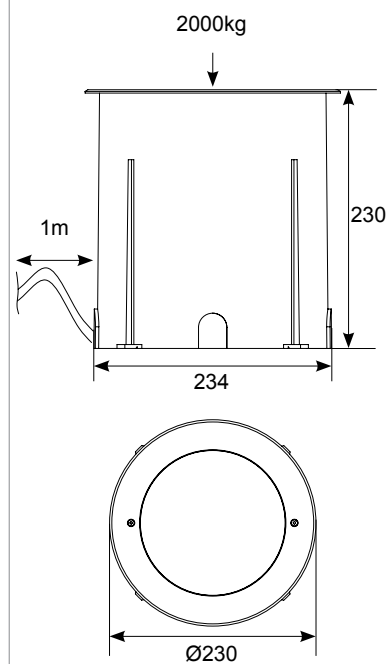

**ATURWOLED/230** LED 19W 4000K


|      |               |
|------|---------------|
| W    | 19W           |
| Lm/D | 2214lm        |
| Lm/W | 116lm         |
| CRI  | Ra 80         |
| CCT  | 4000K         |
| V    | 230V          |
| Hz   | 50/60Hz       |
| Temp | -20°C to 25°C |






# Fresno LED Adjustable Inground Uplight



319



2000kg

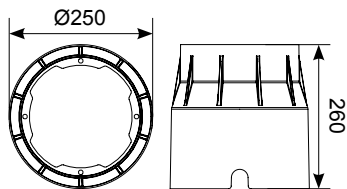

Installation Sleeve



Ángulo del haz ajustable 30°

|      |               |
|------|---------------|
| W    | 19W           |
| Lm/D | 998lm         |
| Lm/W | 53lm          |
| CRI  | Ra 80         |
| CCT  | 3000K         |
| V    | 230V          |
| Hz   | 50Hz          |
| Temp | -20°C to 40°C |

AFRWOLED/220 LED 19W - 3000K



# GU10/MR16 Inground Uplight



**IP  
67**

**CE**

**III**

MR16



GU10



GU10



MR16



95

With  
Sleeve




80

Without  
Sleeve

**DCA**

**SS  
316L**

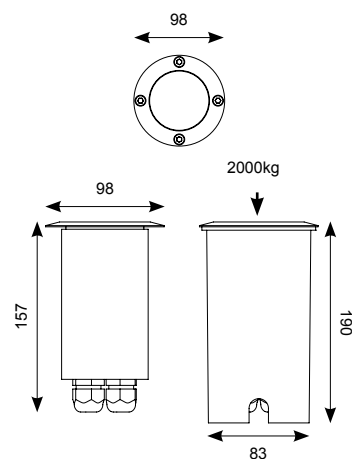


AWO50



GU10/MR16

50W

# GU10 Adjustable Inground Uplight



321

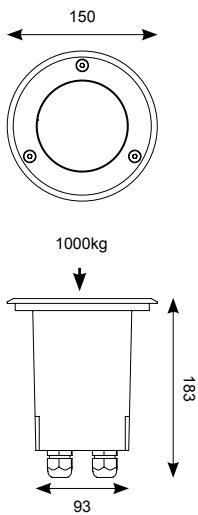

|          |      |     |
|----------|------|-----|
| AWO/GU10 | GU10 | 50W |
|----------|------|-----|

