





Unity 80 LED

p58



Unity 150 DHP LED

p66



Unity 150 LED

p73

Wallwash



Cobra LED Strip

p188

COMERCIAL

48



Downlight LED

96



Downlight de emergencia LED

105



Downlights de superficie LED y GU10

110



Downlight con clasificación contra el fuego

120



Downlights moldeados a presión

122



Accesorios de downlight

124



Circuito simple rail y superficie

144



Circuito triple rail y superficie

156



En suspensión

166



Luminarias de pared

174



Controladores y transformadores LED

180



Tiras LED rígidas y flexibles

199



Luces encadenadas y armario

202




Luminarias para baño



Diseñado para
Entregar...



reddot award
winner lighting design

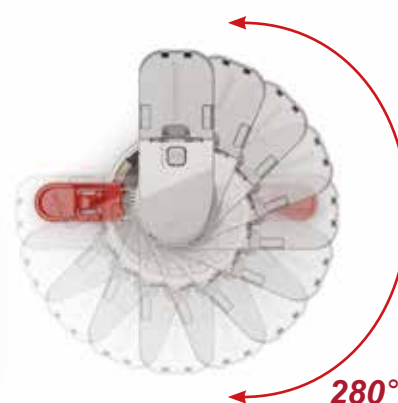

Part B
Test Nos.
30 Minutes Chilt/A/12229
60 Minutes Chilt/A/12230
90 Minutes Chilt/A/12231



Part C
Report Reference No.
BRE/296458



Part E
Report Reference No.
BRE/296459

Orbio 360 Downlight



orbio360®

IP
65



*
PART C

*
PART E

*
30 60 90

L70
50,000

60°



76

DIM

AL

ST

POLY

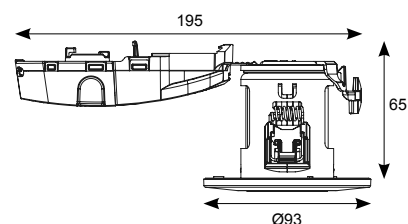

AORBLED/CW LED 8W 4000K

AORBLED/WW LED 8W 3000K



W	8W
Lm/D	
4000K	737lm
3000K	654lm
Lm/W 4000K	92lm
Lm/W 3000K	82lm
CRI	Ra 80
CCT	4000K 3000K
V	220V -240V
Hz	50-60Hz
Temp	-40°C to 25°C



AORBLED/DIMMER


ALEDCP
(/MW, /CH, /SC)


AORBLEDDBZ/BR AORBLEDDBZ/CH AORBLEDDBZ/SC AORBLEDDBZ/AB AORBLEDDBZ/BLC



AORBLEDDBZSQ/MW



AORBLEDDBZSQ/CH



AORBLEDDBZSQ/AB



AORBLEDDBZSQ/BR



AORBLEDDBZSQ/SC



AORBLEDDBZSQ/BLC

Acesorios

AORBLED/DIMMER



AORBLEDDBZ/BR



BR



AORBLEDDBZ/CH



CH

AORBLEDDBZ/SC



SC

AORBLEDDBZ/AB



AB

AORBLEDDBZ/BLC



BLC



AORBLEDDBZ/SQ/MW



MW

AORBLEDDBZ/SQ/BR



BR

AORBLEDDBZ/SQ/CH



CH

AORBLEDDBZ/SQ/SC



SC

AORBLEDDBZ/SQ/AB



AB

AORBLEDDBZ/SQ/BLC



BLC



ALEDDBZ/SQ/MW



MW

ALEDDBZ/SQ/CH



CH

ALEDDBZ/SQ/SC





SC


ALEDDBZ
(/MW, /CH, /SC)


Prism LED Fire Rated Downlight


50

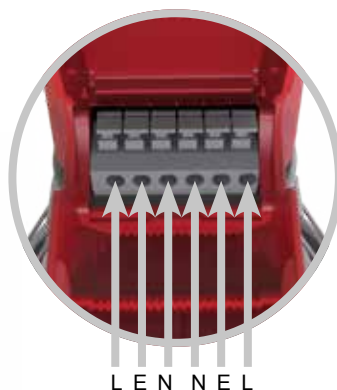

APRILEDDBZ/CH




APRILEDDBZ/SC

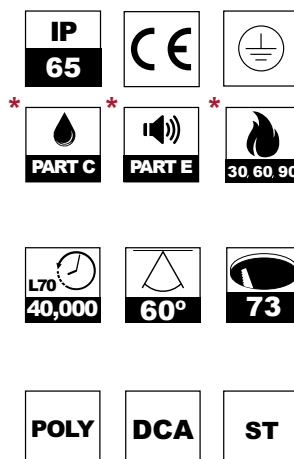

Dim =
Ansell AORBLED/DIMMER

4 - 20 APRILED
Per AORBLED/DIMMER




APRILED/CW	LED	7.3W 4000K
APRILED/WW	LED	7.3W 3000K

Acesorios

APRILEDDBZ/CH	CH
APRILEDDBZ/SC	SC
AORBLED/DIMMER	DIM

W	7.3W
Lm/D	
4000K	715lm
3000K	712lm
Lm/W 4000K	98lm
Lm/W 3000K	96lm
CRI	Ra 80
CCT	4000K
	3000K
V	220V-240V
Hz	50Hz
Temp	-5°C to 25°C



Instalación sin herramientas




Part B
Test Nos.
30 Minutes - WF408531
60 Minutes - WF408527
90 Minutes - WF408530



Part C
Air Tightness

Part C
Test Nos.
P108657-1000




Part E
Passage of Sound
- Acoustics


Part E
Test No.
P17011-1000




Prism LED Fire Rated Downlight Pack



Se suministra completo con:-


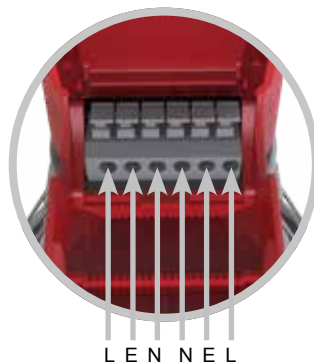


Con selección de temperatura de color: luz diurna, blanco fresco, blanco cálido



Dim =
Ansell AORBLEDDIMMER

10 APRILED/CCTPACK
Per AORBLEDDIMMER



W	8W
Lm/D	
4000K	567lm
3000K	625lm
6000K	675lm
Lm/W 4000K	67lm
Lm/W 3000K	75lm
Lm/W 6000K	85lm
CRI	Ra 80
CCT	6000K 4000K 3000K
V	220V-240V
Hz	50Hz
Temp	-5°C to 25°C



Un producto... *nueve opciones*







6000K

4000K

3000K



Unity GC Pro LED Downlight

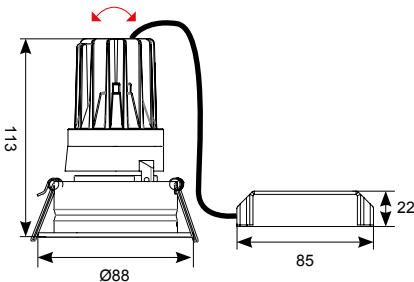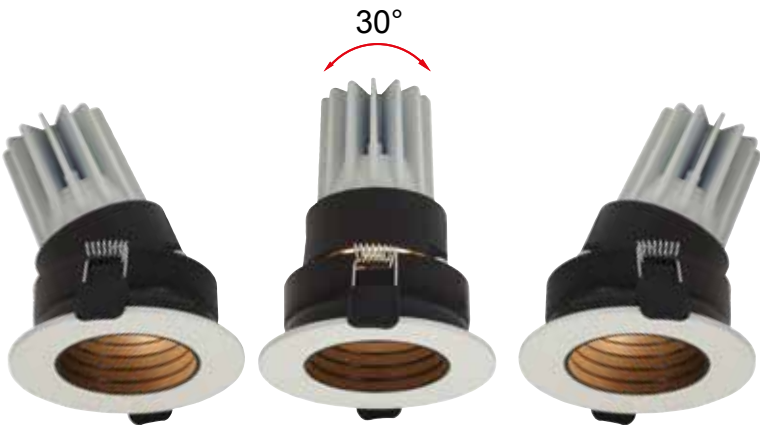

W	10W
Lm/D	
4000K	365lm
3000K	317lm
Lm/W 4000K	37lm
Lm/W 3000K	32lm
CRI	Ra 90
CCT	4000K
	3000K
V	230V
Hz	50Hz
Temp	-20°C to 25°C

AULEDGCP/CW	LED	10W 4000K
AULEDGCP/WW	LED	10W 3000K

/OCTO	
-------	--




Carcasa inclinable



Reflector interno

Unity GC Pro LED Fixed Downlight

56



AULEDGCP1/CW







AULEDGCP2/CW



AULEDGCP3/CW

AULEDGCP1/CW	LED	3W - 4000K
AULEDGCP1/WW	LED	3W - 3000K
AULEDGCP2/CW	LED	8W - 4000K
AULEDGCP2/WW	LED	8W - 3000K
AULEDGCP3/CW	LED	15W - 4000K
AULEDGCP3/WW	LED	15W - 3000K

/OCTO



	4000K	3000K
W	3W 8W 15W	
Lm/D	121lm 262lm 629lm	113lm 252lm 586lm
Lm/W 3W	40lm	38lm
Lm/W 8W	33lm	32lm
Lm/W 15W	42lm	39lm
CRI	Ra 90	
CCT	4000K 3000K	
V	230V	
Hz	50Hz	
Temp	-20°C to 25°C	



Los robustos clips de resorte proporcionan una posición ajustada duradera una vez instalados

Cubiertas protectoras de clip de resorte para protección del techo y facilidad de instalación

OSRAM

CITILED
The Light Engine




La construcción deflectora especialmente diseñada con módulo LED empotrable y difusor proporciona un ángulo de corte pronunciado que garantiza el máximo control del deslumbramiento y comodidad





Unity 80 LED Downlight

58



Powered by
TRIDONIC
▼ enlightening your ideas

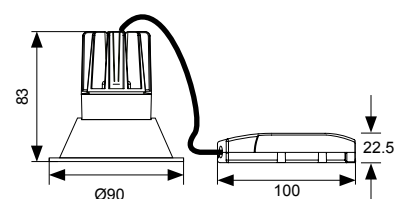

AULED80D	LED	15W 4000K
AULED80D/WW	LED	15W 3000K


/M3		
/OCTO		
/DD		(DD1/DD2/DD3/DD4)

W	15W
Lm/D	
4000K	1056lm
3000K	896lm
Lm/W 4000K	70lm
Lm/W 3000K	60lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C





Unity 80 LED Gimbal

60



Powered by
TRIDONIC
▼enlightening your ideas

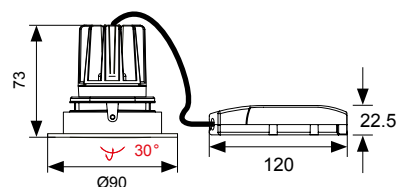

AULED80GIM	LED	15W 4000K
AULED80GIM/WW	LED	15W 3000K


/M3		
/OCTO		
/DD		(DD1/DD2/DD3/DD4)

W	15W
Lm/D	
4000K	1056lm
3000K	896lm
Lm/W 4000K	70lm
Lm/W 3000K	60lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C







Unity 125 LED Downlight



63



Powered by
TRIDONIC
▼ enlightening your ideas

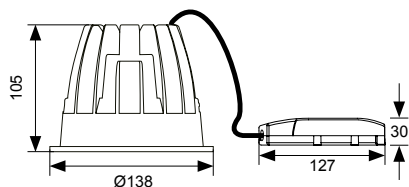


W	21W
Lm/D	
4000K	1521lm
3000K	1386lm
Lm/W 4000K	72lm
Lm/W 3000K	66lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C

AULED125D	LED	21W 4000K
AULED125D/WW	LED	21W 3000K



/M3		
/OCTO		
/DD		(DD1/DD2/DD3/DD4)



Unity 150 LED Downlight



Powered by
TRIDONIC
▼ enlightening your ideas

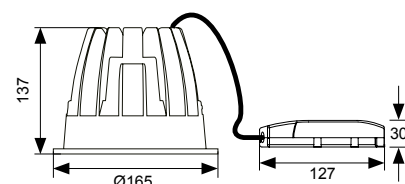

AULED150D	LED	37W 4000K
AULED150D/WW	LED	37W 3000K


/M3		
/OCTO		
/DD		(DD1/DD2/DD3/DD4)

W	37W
Lm/D	
4000K	3254lm
3000K	2870lm
Lm/W 4000K	88lm
Lm/W 3000K	78lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C





Unity 150 DHP LED Downlight

66



Powered by
TRIDONIC
▼ enlightening your ideas

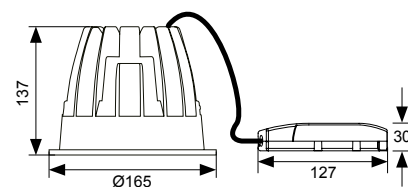

AULED150DHP LED 41W 4000K

/M3



/OCTO



/DD




(DD1/DD2/DD3/DD4)

W	41W
Lm/D	3900lm
Lm/W	95lm
CRI	Ra 90
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C



Unity 100 Square LED Downlight




68



Powered by
TRIDONIC
▼ enlightening your ideas



Perfil circular

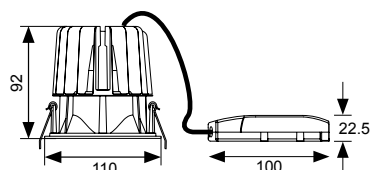

AUSQLED100D/CW LED 14W 4000K

/M3



/OCTO



/DD




(DD1/DD2/DD3/DD4)

W	14W
Lm/D	1152lm
Lm/W	82lm
CRI	Ra 90
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C

Unity 125 Square LED Downlight


69



Powered by
TRIDONIC
▼ enlightening your ideas



Perfil circular

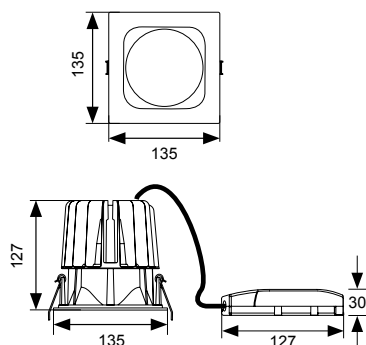


W	29W
Lm/D	2639lm
Lm/W	91lm
CRI	Ra 90
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C





AUSQLED125D/CW		LED	29W 4000K
/M3			
/OCTO			
/DD		(DD1/DD2/DD3/DD4)	



Unity 150 Square LED Downlight



Perfil circular

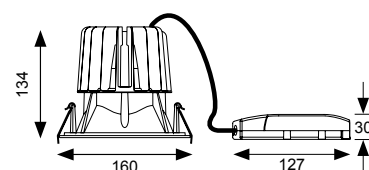

AUSQLED150DHP/CW LED 41W 4000K

/M3



/OCTO



/DD




(DD1/DD2/DD3/DD4)

W	41W
Lm/D	3775lm
Lm/W	92lm
CRI	Ra 90
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C

Unity 100 LED Wallwash




71



red dot award
winner lighting design

Powered by
TRIDONIC
▼ enlightening your ideas

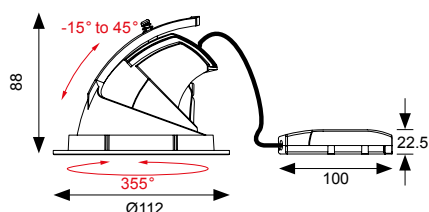

W	15W
Lm/D	
4000K	1041lm
3000K	896lm
Lm/W 4000K	74lm
Lm/W 3000K	60lm
CRI	Ra 90
CCT	4000K 3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C


AULED100WW	LED	15W - 4000K
AULED100WW/WW	LED	15W - 3000K
/OCTO		
/DD		(DD1/DD2/DD3/DD4)






Unity 150 LED Wallwash

73



reddot award
winner lighting design

Powered by
TRIDONIC
▼ enlightening your ideas

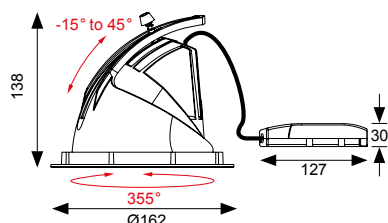

W	28W
Lm/D	
4000K	2699lm
3000K	2497lm
Lm/W 4000K	93lm
Lm/W 3000K	86lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C

AULED150WW	LED	28W - 4000K
AULED150WW/WW	LED	28W - 3000K



/OCTO		
/DD		(DD1/DD2/DD3/DD4)





Unity 175 LED Wallwash

75

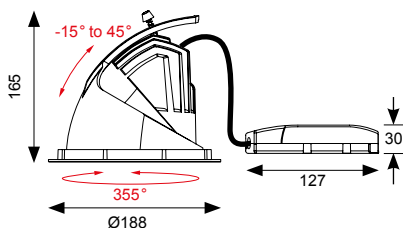

red dot award
winner lighting design

Powered by
TRIDONIC
▼ enlightening your ideas




W	35W
Lm/D	
4000K	3239lm
3000K	2887lm
Lm/W 4000K	88lm
Lm/W 3000K	78lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C



AULED175WW	LED	35W - 4000K
AULED175WW/WW	LED	35W - 3000K
/OCTO		
/DD		(DD1/DD2/DD3/DD4)



Unity Rectangular LED Wallwash



Powered by
TRIDONIC
▼ enlightening your ideas




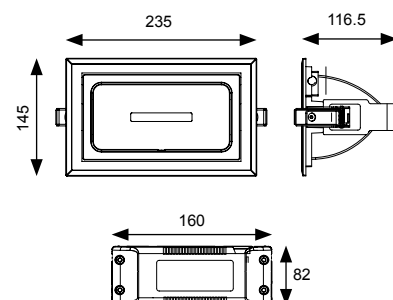



AULEDRECWW	LED	35W - 4000K
/OCTO		
/DD		(DD1/DD2/DD3/DD4)


W	35W
Lm/D	3065lm
Lm/W	85lm
CRI	Ra 80
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C

Unity S and R Retractable LED Downlights

77



W	
AULED1/SMP	15W
AULED2/RMP	2 x 15W
Lm/D	
AULED1/SMP	736lm
AULED2/RMP	2 x 736lm
Lm/W	49lm
CRI	Ra 90
CCT	4000K
V	220V-240V
Hz	50Hz
Temp	-20°C to 25°C



AULED1/SMP

Powered by
TRIDONIC
▼ enlightening your ideas



AULED2/RMP






AULED1/SMP	LED	15W - 4000K
AULED2/RMP	LED	2 x 15W - 4000K

/OCTO		
/DD		(DD1/DD2/DD3/DD4)






Unity S and R LED Downlights



W	
AULED1/SQU	37W
AULED2/REC	2 x 37W
Lm/D	
AULED1/SQU	3239lm
AULED2/REC	2 x 3239lm
Lm/W	88lm
CRI	Ra 90
CCT	4000K
V	230V
Hz	50-60Hz
Temp	-20°C to 25°C



AULED1/SQU

Powered by
TRIDONIC
▼enlightening your ideas



AULED2/REC


AULED1/SQU	LED	37W - 4000K
AULED2/REC	LED	2 x 37W - 4000K

/OCTO		
/DD		(DD1/DD2/DD3/DD4)




Comfort LED Downlight

81



Powered by
TRIDONIC
▼ enlightening your ideas

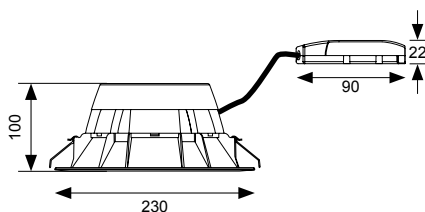

W	13W	19W
Lm/D		
4000K	1620lm	2350lm
3000K	1502lm	2166lm
Lm/W 4000K	123lm	124lm
Lm/W 3000K	114lm	113lm
CRI	Ra 80	
CCT	4000K	
	3000K	
V	220V-240V	
Hz	50-60Hz	
Temp	-20°C to 35°C	


ACOLED1/CW	LED	13W 4000K
ACOLED2/CW	LED	19W 4000K

ACOLED1/WW	LED	13W 3000K
ACOLED2/WW	LED	19W 3000K


/M3		
/OCTO		
/DD		(DD1/DD2/DD3/DD4)



Comfort LED HP Downlight



Powered by
TRIDONIC
▼ enlightening your ideas

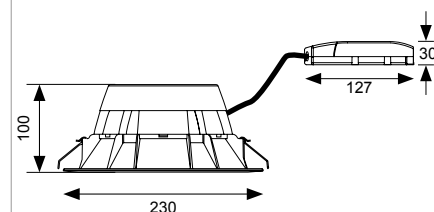


ACOLED3/CW	LED	34W 4000K
ACOLED3/WW	LED	34W 3000K

/M3		
/OCTO		
/DD		(DD1/DD2/DD3/DD4)


W	34W
Lm/D	
4000K	3830lm
3000K	3621lm
Lm/W 4000K	112lm
Lm/W 3000K	106lm
CRI	Ra 80
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 35°C

Comfort LED Wallwash

83





Powered by
TRIDONIC
▼ enlightening your ideas

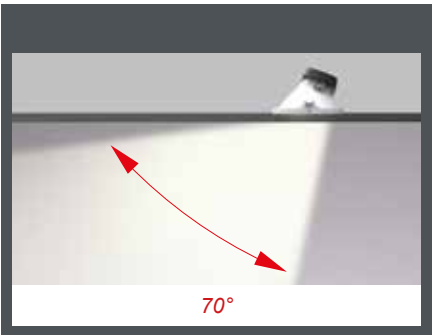

ACOLEDWW/CW	LED	17W - 4000K
ACOLEDWW/WW	LED	17W - 3000K

/OCTO		
/DD		(DD1/DD2/DD3/DD4)

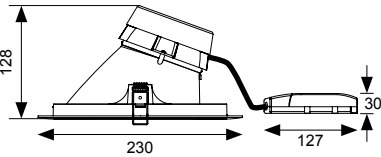


W	17W
Lm/D	
4000K	1187lm
3000K	1113lm
Lm/W 4000K	70lm
Lm/W 3000K	66lm
CRI	Ra 80
CCT	4000K
	3000K
V	220V-240V
Hz	50Hz
Temp	-20°C to 25°C



Galaxy CCT LED Downlight






84



AGALED/1/CCT



AGALED/1/CCT + AGPL/DG1/W

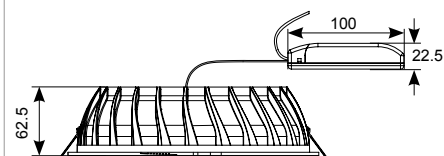

AGALED/1/CCT	LED	15W 4000K / 3000K
AGALED/2/CCT	LED	20W 4000K / 3000K

/M3		
/OCTO		
/DD		(DD1/DD2/DD3/DD4)

Acesorios

AGPL/DG1

AGPL/DG1/W c/w W

AGPL/DG3

AGPL/DG3/W c/w W


W	15W	20W
Lm/D		
4000K	1557lm	2250lm
3000K	1484lm	2230lm
Lm/W 4000K	103lm	112lm
Lm/W 3000K	98lm	112lm
CRI	Ra 80	
CCT	3000K/4000K	
V	220V-240V	
Hz	50-60Hz	
Temp	-20°C to 40°C	





Vega LED Downlight


87



AVEGLED/1/WW



AVEGLED/1/CW



W	17W	23W
Lm/D		
4000K	1435lm	1946lm
3000K	1389lm	1860lm
Lm/W 4000K	84lm	84lm
Lm/W 3000K	82lm	83lm
CRI	Ra 80	
CCT	4000K 3000K	
V	220V-240V	
Hz	50/60Hz	
Temp	-5°C to 25°C	

AVEGLED/1/CW	LED	17W 4000K
AVEGLED/2/CW	LED	23W 4000K
AVEGLED/1/WW	LED	17W 3000K
AVEGLED/2/WW	LED	23W 3000K
/M3		

Freska LED Downlight

88



AFRLED230/CW



AFRLED170/CW



AFRLED125/CW





AFRLED/M3/ST


AFRLED125/CW	LED	10W 4000K
AFRLED170/CW	LED	13W 4000K
AFRLED230/CW	LED	19W 4000K
AFRLED125/WW	LED	10W 3000K
AFRLED170/WW	LED	13W 3000K
AFRLED230/WW	LED	19W 3000K
AFRLED/M3/ST		

Bateria

ASBP/12	7.2V 3000mAh Ni-cd Replacement Battery
----------------	--

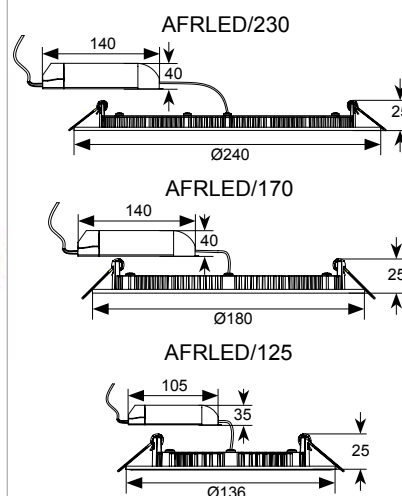





W	10W	13W	19W
Lm/D			
10W	618lm	534lm	
13W	916lm	795lm	
19W	1208lm	1152lm	
Lm/W 10W	62lm	59lm	
Lm/W 13W	70lm	61lm	
Lm/W 19W	64lm	61lm	
CRI	Ra 80		
CCT	4000K 3000K		
V	220V-240V		
Hz	50-60Hz		
Temp	-10°C to 40°C		



ABXLED190



ABXLED140 ABXLED110 ABXLED100



ABXLED190/CW




ABXLED140/CW



ABXLED110/CW



ABXLED100/WW

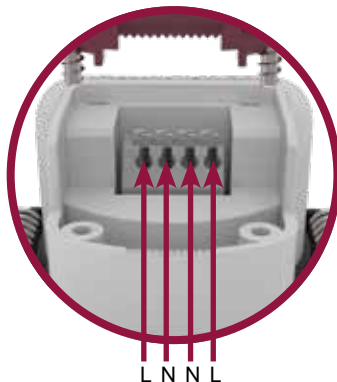

W	5W	12W
	7W	19W
Lm/D	4000K	3000K
5W	403lm	371lm
7W	587lm	576lm
12W	875lm	857lm
19W	1657lm	1620lm
Lm/W 5W	80lm	74lm
Lm/W 7W	84lm	82lm
Lm/W 12W	73lm	71lm
Lm/W 19W	87lm	85lm
CRI	Ra 80	
CCT	4000K	
	3000K	
V	220V-240V	
Hz	50-60Hz	
Temp	-10°C to 45°C	

ABXLED100/CW	LED	5W	4000K
ABXLED110/CW	LED	7W	4000K
ABXLED140/CW	LED	12W	4000K
ABXLED190/CW	LED	19W	4000K

ABXLED100/WW	LED	5W	3000K
ABXLED110/WW	LED	7W	3000K
ABXLED140/WW	LED	12W	3000K
ABXLED190/WW	LED	19W	3000K

Acesorios

ASLED/3NM	LED	1.5W Non-Maintained	
------------------	-----	---------------------	--

Bexar LED Downlight



Lodi LED Slim Downlight

90



ALODLED/75/CW



ALODLED/95/WW



ALODLED/110/CW

ALODLED/75/CW	LED	4W 4000K
ALODLED/95/CW	LED	8W 4000K
ALODLED/110/CW	LED	11W 4000K
ALODLED/75/WW	LED	4W 3000K
ALODLED/95/WW	LED	8W 3000K
ALODLED/110/WW	LED	11W 3000K

Acesorios


ASLED/3NM	LED	1.5W Non-Maintained
------------------	-----	---------------------




ALODLED/75




ALODLED/95 ALODLED/110



ALODLED/75





ALODLED/95



ALODLED/110

W	4W	8W	11W
Lm/D	4000K	3000K	
4W	307lm	286lm	
8W	620lm	589lm	
11W	740lm	683lm	
Lm/W 4W	77lm	71lm	
Lm/W 8W	79lm	76lm	
Lm/W 11W	68lm	62lm	
CRI	Ra 80		
CCT	4000K	3000K	
V	220V - 240V		
Hz	50Hz		
Temp	-15°C to 25°C		


Lodi LED Slim Downlight




ALODLED/150




ALODLED/200 ALODLED/250



ALODLED/150



ALODLED/200



ALODLED/250

W	16W	
	22W	
	25W	
Lm/D	4000K	3000K
16W	1089lm	1070lm
22W	1604lm	1527lm
25W	2035lm	1953lm
Lm/W 16W	72lm	66lm
Lm/W 22W	77lm	73lm
Lm/W 25W	85lm	80lm
CRI	Ra 80	
CCT	4000K	
	3000K	
V	220V - 240V	
Hz	50Hz	
Temp	-20°C to 25°C	



91



ALODLED/150/CW



ALODLED/200/WW



ALODLED/250/CW

ALODLED/150/CW	LED	16W 4000K
ALODLED/200/CW	LED	22W 4000K
ALODLED/250/CW	LED	25W 4000K
ALODLED/150/WW	LED	16W 3000K
ALODLED/200/WW	LED	22W 3000K
ALODLED/250/WW	LED	25W 3000K

Acesorios

ASLED/3NM	LED	1.5W Non-Maintained
------------------	-----	---------------------



Argo LED IP65 Downlight

92



AARGD/CW



AARGD/WW




AARGD/IP65BEZ/CH



AARGD/IP65BEZ/SC



AARGD/IP65BEZ/BL


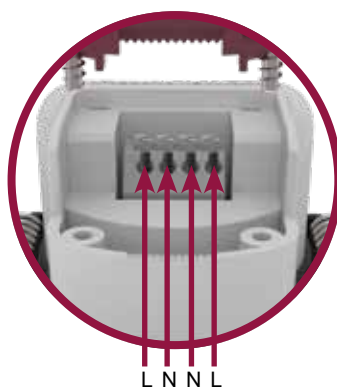


L N N L

AARGD/CW	LED	5W 4000K
AARGD/WW	LED	5W 3000K

Acesorios


AARGD/IP65BEZ/CH	CH
AARGD/IP65BEZ/SC	SC
AARGD/IP65BEZ/BL	BL





W	5W
Lm/D	
4000K	438lm
3000K	427lm
Lm/W 4000K	87lm
Lm/W 3000K	85lm
CRI	Ra 80
CCT Cool White	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-10°C to 40°C

Argo LED Gimbal

93



POLY

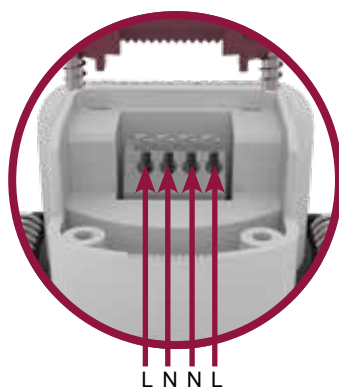

AARG/GIM/CW/W




W	5W
Lm/D	
4000K	460lm
3000K	400lm
Lm/W 4000K	92lm
Lm/W 3000K	80lm
CRI	Ra 80
CCT Cool White	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-10°C to 40°C

AARG/GIM/CW/W	LED	5W 4000K
AARG/GIM/WW/W	LED	5W 3000K





Capizzi LED



ACDLEDX1



ACDLEDX2

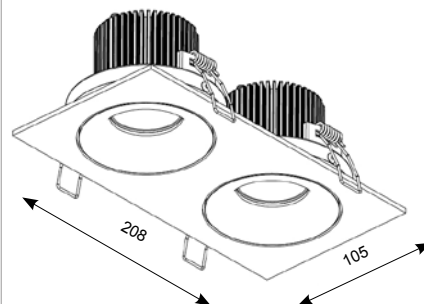


ACDLEDX1	LED	1 x 8W 3000K
ACDLEDX2	LED	2 x 8W 3000K

Controladores

AD9W/350	9W 350mA LED Driver
ADK20W/350	20W 350mA LED Driver
AMCD25W	18W 350mA Dimmable LED Driver
AMCD50W	25W 350mA Dimmable LED Driver

W	1x8W 2x8W
Lm/D	361lm 723lm
Lm/W	45lm
CRI	Ra 80
CCT	3000K
V	350mA
Hz	50-60Hz
Temp	-10°C to 40°C



AIGLED/CW




AIGLED/WW



AIGLED/CW/W



AIGLED/WW/W



W	3W
Lm/D	
4000K	172lm
3000K	141lm
Lm/W 4000K	31lm
Lm/W 3000K	28lm
CRI	Ra 80
CCT	4000K
	3000K
V	700mA
Hz	50-60Hz
Temp	-20°C to 25°C

AIGLED/CW	LED	3W - 4000K	SC
AIGLED/WW	LED	3W - 3000K	SC
AIGLED/CW/W	LED	3W - 4000K	W
AIGLED/WW/W	LED	3W - 3000K	W

Controladores

AD3W/700	3W 700mA LED Driver
ADK12W/700	12W 700mA LED Driver
ADK20W/700	20W 700mA LED Driver
AMCD25W	32W 700mA Dimmable LED Driver
AMCD50W	50W 700mA Dimmable LED Driver

Signal Pro LED Lithium Emergency Downlight


96



ASPRLED/LI/3M/DA
Open Area Lens




ASPRLED/LI/3M/DA
Escape Route Lens

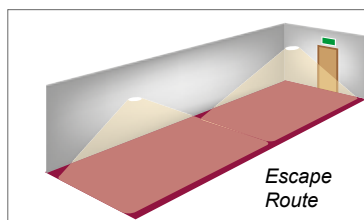

Escape
Route

Escape route 2 metres wide (1 Lux minimum) *				
Mounting Height (M)	***			
	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
2.5	-	-	6	14
4	-	-	5.5	16
6	-	-	-	-

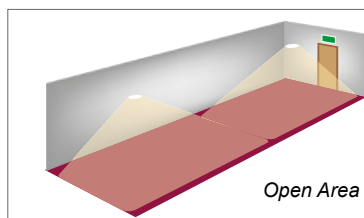

Open Area





Open (Anti-Panic) area (0.5 Lux Minimum)**				
Mounting Height (M)	***			
	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
2.5	4	8	4	8
4	4.7	9	4.7	9
6	4.9	9.5	4.9	9.5

*Normas del Reino Unido mostradas

ASPRLED/LI/3M/DA	LED	2.5W - Non Mantenido
------------------	-----	----------------------

Bateria


ASBP/19	6.4V 1500mAh LiFePO4 Lithium Replacement Battery
---------	--

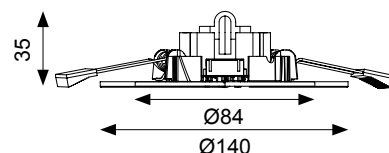



ASBP/19

W	2.5W
Lm/D	
OA	209lm
ER	201lm
CCT	6000K
V	220-240V
Hz	50Hz
Temp	5°C to 40°C

Signal LED Emergency Downlight



97



ASBP/8



ASLED/3NM



ASLED/3NM/B

		Escape route 2 metres wide (1 Lux minimum) *				
		***	□ ↔ ▨	□ ↔ □	□ ↔ ▨	□ ↔ □
	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
ASLED/3NM	2.5	3	8.5	3	8.5	
	4	3	9	3	9	
	6	3	11	3	11	
ASLED/3NM/B	2.5	2.7	7	2.7	7	
	4	2.6	7.5	2.6	7.5	
	6	2.6	7.5	2.6	7.5	

		Open (Anti-Panic) area (0.5 Lux Minimum)**				
		***	□ ↔ ▨	□ ↔ □	□ ↔ ▨	□ ↔ □
	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
ASLED/3NM	2.5	3.6	7.5	3.6	7.5	
	4	3.6	10.5	3.6	10.5	
	6	3.6	11	3.6	11	
ASLED/3NM/B	2.5	3	6.3	3	6.3	
	4	3	9	3	9	
	6	3	10.5	3	10.5	

*Normas del Reino Unido mostradas

W	1.5W
Lm/D	
ASLED/3NM	100lm
ASLED/3NM/B	107lm
CCT	6500K
V	220V-240V
Hz	50-60Hz
Temp	0°C to 40°C

ASLED/3NM	LED	1.5W - Non Mantenido	W
ASLED/3NM/B	LED	1.5W - Non Mantenido	BL




Bateria

ASBP/8	3.6V 2Ah Ni-Cd Replacement Battery
--------	------------------------------------



Beacon LED

Emergency Adjustable Downlight



ASBP/9

Escape route 2 metres wide (1 Lux minimum) *					

Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	2	5.25	2	5.25	
4	2.5	6.5	2.5	6.5	
6	-	-	-	-	

Open (Anti-Panic) area (0.5 Lux Minimum) **					

Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	2.25	5.7	2.25	5.7	
4	2.5	7.1	2.5	7.1	
6	3	8.25	3	8.25	

Normas del Reino Unido mostradas



W	5W
Lm/D	248lm
CCT	6500K
V	220V-240V
Hz	50-60Hz
Temp	0°C to 40°C

ABLED/3NM	LED	5W - Non Mantenido
Bateria		
ASBP/9	3.6V 4.5Ah Ni-Cd Replacement Battery	

Beacon LED Fixed Emergency Downlight



99



ASBP/9

Escape route 2 metres wide (1 Lux minimum) *					

	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
	2.5	-	-	3	9.5
	4	-	-	3.3	11.5
	6	-	-	-	-

Open (Anti-Panic) area (0.5 Lux Minimum) **					

	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
	2.5	3.5	8.9	3.5	8.9
	4	4	11.4	4	11.4
	6	4.5	12.9	4.5	12.9

Normas del Reino Unido mostradas

W	5W
Lm/D	
E mode	316lm
CCT	6500K
V	230V
Hz	50Hz
Temp	0°C to 40°C

ABFLED/3NM	LED	5W - Non Mantenido
------------	-----	--------------------

Bateria

ASBP/9	3.6V 4.5Ah Ni-Cd Replacement Battery
--------	--------------------------------------



Raven LED

Lithium Emergency Downlight




Downlight de emergencia con
inversor integral y batería




ARALED/ER/3NM/ST



ARALED/OA/3NM/ST



OA



ER

Escape route 2 metres wide (1 Lux minimum) *					
Mounting Height (M)	***				
	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	-	-	4	10	
4	-	-	3	11	
6	**	**	**	**	

Open (Anti-Panic) area (0.5 Lux Minimum) **					
Mounting Height (M)	***				
	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	2.5	4.88	2.5	4.88	
4	2.8	6.69	2.8	6.69	
6	2	8.5	2	8.5	

Normas del Reino Unido mostradas

ARALED/ER/3NM/ST	LED	3W - Non Mantenido ER
ARALED/OA/3NM/ST	LED	3W - Non Mantenido OA


Batería

ASBP/14	3.2V 2600mA Li-FePO4 Lithium Replacement Battery
---------	--

W	3W
Lm/D	
ARALED/OA/3NM/ST	114lm
ARALED/ER/3NM/ST	90lm
CCT	6500K
V	220-240V
Hz	50-60Hz
Temp	0C° to 40C°

Merlin LED Emergency Downlight




101



AMELED/OA/3NM/ST



AMELED/ER/3NM/ST/B



ASBP/9

		Escape route 2 metres wide (1 Lux minimum) *				
		***	□ ↔ ▨	□ ↔ □	□ ↔ ▨	□ ↔ □
Mounting Height (M)		Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	AMELED/ER/3NM/ST	-	-	5.5	14	
4	AMELED/ER/3NM/ST/B	-	-	7.5	19.6	
2.5		-	-	5	14	
4		-	-	7	19.5	

		Open (Anti-Panic) area (0.5 Lux Minimum)**				
		***	□ ↔ ▨	□ ↔ □	□ ↔ ▨	□ ↔ □
Mounting Height (M)		Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	AMELED/OA/3NM/ST	3	6.5	3	6.5	
4		4	9.5	4	9.5	
6		5	11.5	5	11.5	
2.5	AMELED/OA/3NM/ST/B	3	6	3	6	
4		4	9	4	9	
6		4.5	10	4.5	10	

Normas del Reino Unido mostradas

W	5W
Lm/D	/B
AMELED/OA/3NM/ST	245lm 191lm
AMELED/ER/3NM/ST	206lm 229lm
CCT	6500K
V	230V
Hz	50/60Hz
Temp	0°C to 45°C

AMELED/ER/3NM/ST	LED	5W - Non Mantenido ER	● W
AMELED/OA/3NM/ST	LED	5W - Non Mantenido OA	● W
AMELED/ER/3NM/ST/B	LED	5W - Non Mantenido ER	● BL
AMELED/OA/3NM/ST/B	LED	5W - Non Mantenido OA	● BL

Batería

ASBP/9	3.6V 4.5Ah Ni-Cd Replacement Battery
--------	--------------------------------------

International: +44 (0) 1942 433343
Warrington: +44 (0) 1942 433333
Belfast: +44 (0) 2890 773750



IP65 Falcon LED Surface Emergency Downlight

102



AFALED/3NM/ST/IP65




AFALED/3NM/ST/IP65/B



Open Area Lens



Escape Route Lens




AFALED/OA/3NM/ST



AFALED/ER/3NM/ST



AFALED/ER/3NM/ST/B



		Escape route 2 metres wide (1 Lux minimum) *				
		***	***	***	***	***
Mounting Height (M)		Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	AFALED/ER/3NM/ST	-	-	4.2	10	
4	AFALED/ER/3NM/ST	-	-	4.25	12	
2.5	AFALED/ER/3NM/ST/B	-	-	4	9.5	
4	AFALED/ER/3NM/ST/B	-	-	3.6	11	

		Open (Anti-Panic) area (0.5 Lux Minimum)**				
		***	***	***	***	***
Mounting Height (M)		Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	AFALED/OA/3NM/ST	2.5	5	2.5	5	
4	AFALED/OA/3NM/ST	3.5	7.1	3.5	7.1	
6	AFALED/OA/3NM/ST	4	9.8	4	9.8	
2.5	AFALED/OA/3NM/ST/B	2.5	4.8	2.5	4.8	
4	AFALED/OA/3NM/ST/B	3.5	6.8	3.5	6.8	
6	AFALED/OA/3NM/ST/B	4	9.8	4	9.8	

Normas del Reino Unido mostradas

AFALED/3NM/ST/IP65	LED	3W - Non Mantenido	W
AFALED/3NM/ST/IP65/B	LED	3W - Non Mantenido	B

Bateria

ASBP/10	3.6V 3Ah Ni-Cd Replacement Battery
---------	------------------------------------

W	3W
Lm/D	/B
AFALED/OA/3NM/ST	152lm 142lm
AFALED/ER/3NM/ST	138lm 116lm
CCT	6500K
V	220V-240V
Hz	50-60Hz
Temp	0C° to 40C°



LED Emergency Lighting Pack

104




ACFLP/3

ACFLP/3 LED - Mantenido / Non Mantenido

Comfort CCT LED Surface Downlight



105

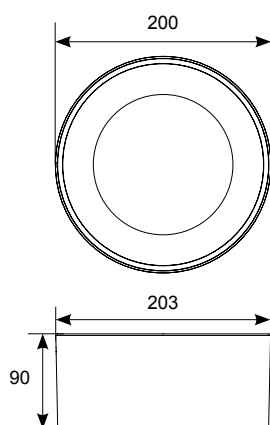

Powered by
TRIDONIC
▼ enlightening your ideas





W	21W	26W
Lm/D		
4000K	1931lm	2430lm
3000K	1796lm	2352lm
Lm/W 4000K	92lm	94lm
Lm/W 3000K	85lm	91lm
CRI	Ra 80	
CCT	3000K	
	4000K	
V	230V	
Hz	50/60Hz	
Temp	-20°C to 50°C	

ASCOLED/1/CCT	LED	21W - 4000K/3000K
ASCOLED/2/CCT	LED	26W - 4000K/3000K

/OCTO		
/DD		(DD1/DD2/DD3/DD4)



Freska Surface LED Downlight




ASFRLED230/CW LED 18W 4000K



ASFRLED230/WW LED 18W 3000K

W	18W
Lm/D	
4000K	1368lm
3000K	1273lm
Lm/W 4000K	76lm
Lm/W 3000K	70lm
CRI	Ra 80
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 40°C

Rieti Surface LED Downlight



107







W	8W
Lm/D	
4000K	659lm
3000K	607lm
Lm/W 4000K	82lm
Lm/W 3000K	76lm
CRI	Ra 90
CCT	4000K
	3000K
V	230V
Hz	50Hz
Temp	-20°C to 25°C

ARIELED/CW	LED	8W - 4000K
ARIELED/WW	LED	8W - 3000K




Uni LED

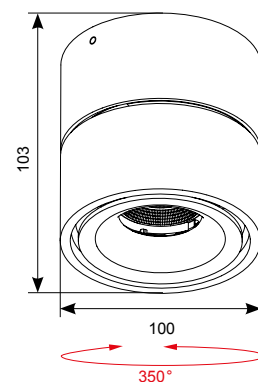

W	9W
Lm/D	645lm
Lm/W	72lm
CRI	Ra 80
CCT	3000K
V	220V-240V
Hz	50-60Hz
Temp	-10°C to 40°C

AUNIVLED LED 9W 3000K


Novara Surface GU10



109




ANSGU10/SC

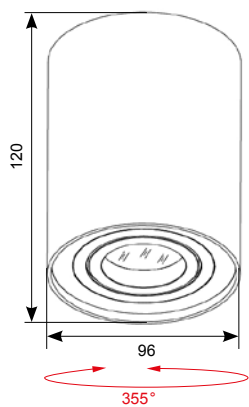

ANSGU10/W

ANSGU10/W	GU10	50W	 W
ANSGU10/SC	GU10	50W	 SC

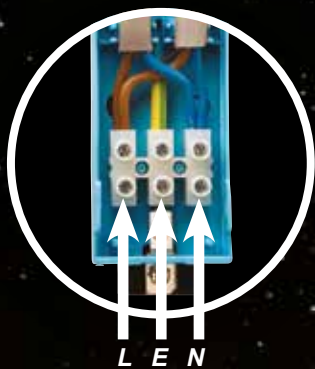

POLY





INNOVADORA ACCIÓN INTUMESCENTE

Este diseño registrado y patentado incorpora una reacción intumescente única que permite un concepto totalmente nuevo como una luminaria en jaula.


En comparación con los diseños actuales en cajas cerradas con clasificación contra el fuego, iCage Mini y sus componentes funcionan en un entorno más fresco y no dependen de bombillas con disipación delantera del calor para proporcionar unas temperaturas más bajas de funcionamiento.



Normal Operation



Activated Intumescent

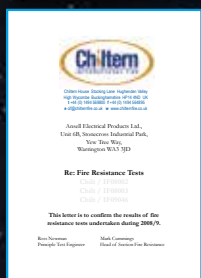

Part B
Test Nos.
30 Minutes Chilt/A/12229
60 Minutes Chilt/A/12230
90 Minutes Chilt/A/12231

Part C
Test Nos.
P100567

Part E
Test No.
BRE/254782



Blanco mate



Blanco



Latón



Cromo



Cromo satinado




Latón envejecido



Negro

iCage Mini

50W GU10 Die-Cast Downlight



AMICD/W



AMICD/MW



AMICD/BR



AMICD/CH





AMICD/SC



AMICD/AB



AMICD/BLC

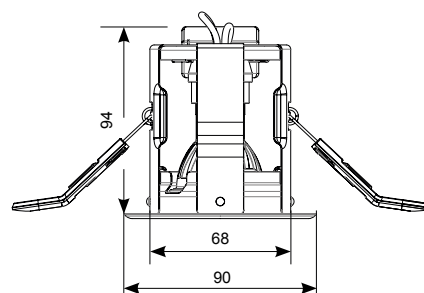


AMICD/W	GU10	50W	W
AMICD/MW	GU10	50W	MW
AMICD/BR	GU10	50W	BR
AMICD/CH	GU10	50W	CH
AMICD/SC	GU10	50W	SC
AMICD/AB	GU10	50W	AB
AMICD/BLC	GU10	50W	BLC



iCage Mini

50W GU10 Die-Cast Gimbal



AMICG/W



AMICG/MW




AMICG/BR




AMICG/CH




AMICG/SC

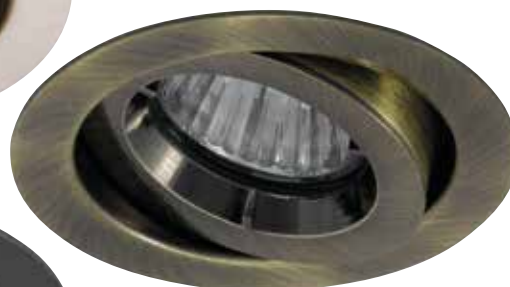

AMICG/AB

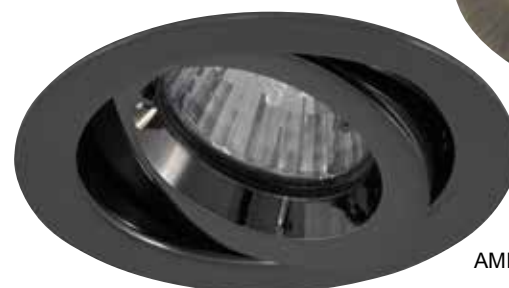


AMICG/BLC



GU10 LED

GU10 Halogen

AMICG/W	GU10	50W	W
AMICG/MW	GU10	50W	MW
AMICG/BR	GU10	50W	BR
AMICG/CH	GU10	50W	CH
AMICG/SC	GU10	50W	SC
AMICG/AB	GU10	50W	AB
AMICG/BLC	GU10	50W	BLC

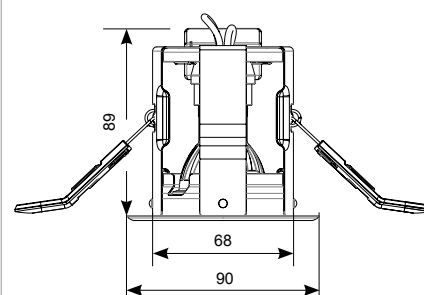


iCage Mini

IP65 50W GU10 Die-Cast Downlight



115



AMICD/IP65/W



AMICD/IP65/MW



AMICD/IP65/BR



AMICD/IP65/CH




AMICD/IP65/SC



AMICD/IP65/AB



AMICD/IP65/BLC

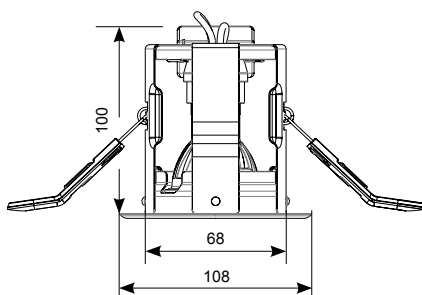

AMICD/IP65/W	GU10	50W		W
AMICD/IP65/MW	GU10	50W		MW
AMICD/IP65/BR	GU10	50W		BR
AMICD/IP65/CH	GU10	50W		CH
AMICD/IP65/SC	GU10	50W		SC
AMICD/IP65/AB	GU10	50W		AB
AMICD/IP65/BLC	GU10	50W		BLC



Part B
Test Nos.
90 Minutes - Exova 376484/B



bre

Part C
Air Tightness

Part C
Test Nos.
BRE P107853-1001



bre



Part E
Passage of Sound
- Acoustics

Part E
Test No.
BRE P107853-1000



bre

EXOVA

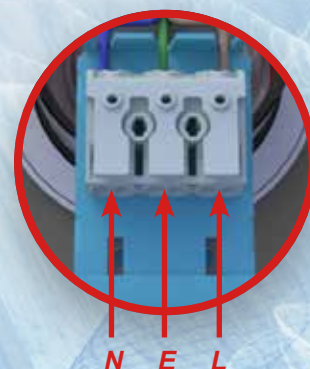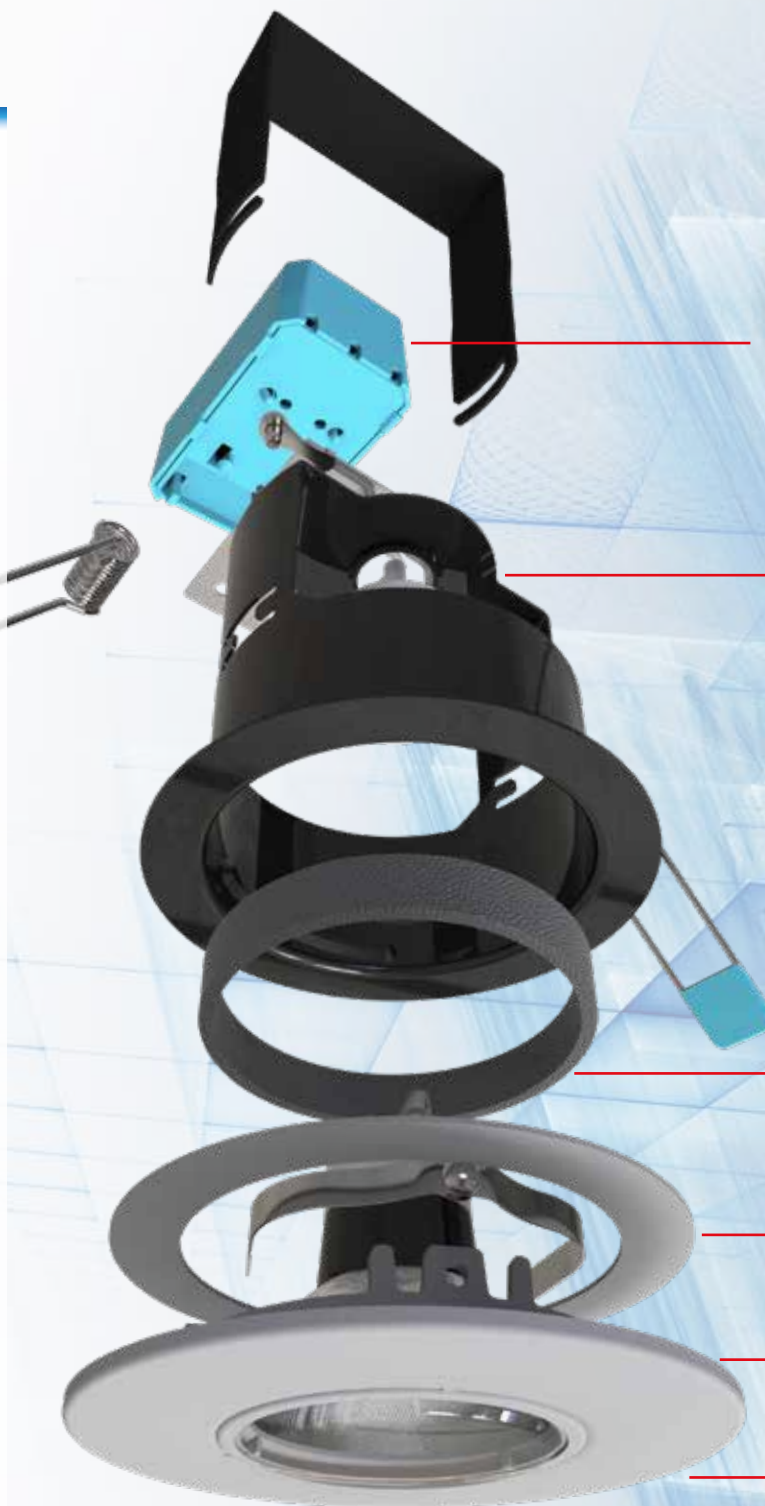

N E L



GU10 LED



30 60 90



PART E



PART C



IP65 Downlight



IP20 Gimbal



AEFRD/MW




AEFRD/CH



AEFRD/SC



GU10 LED GU10 Halogen



AEFRD/MW	GU10	50W		MW
AEFRD/CH	GU10	50W		CH
AEFRD/SC	GU10	50W		SC

Acesorios

AEFRISD

Soporte de aislamiento para downlight

Edge GU10 Fire Rated Gimbal



AEFRG/MW



AEFRG/CH




AEFRG/SC




AEFRG/MW	GU10	50W		MW
AEFRG/CH	GU10	50W		CH
AEFRG/SC	GU10	50W		SC

Acesorios

AEFRISG	Soporte de aislamiento del cardán
----------------	-----------------------------------

EDGE™
GU10/FRO

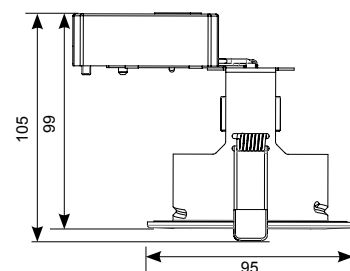

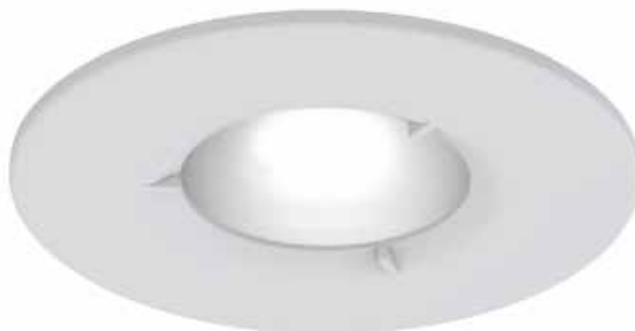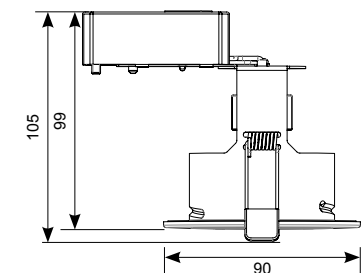

AEFRD/IP65/MW



AEFRD/IP65/CH



AEFRD/IP65/SC

AEFRD/IP65/MW	GU10	50W -	MW
AEFRD/IP65/CH	GU10	50W -	CH
AEFRD/IP65/SC	GU10	50W -	SC

Acesorios

AEFRISD	Soporte de aislamiento para downlight
----------------	---------------------------------------

Lyric GU10

120



ALGU10/1



ALGU10/1/MW



ALGU10/2/MW



ALGU10/2



ALGU10/3



ALGU10/3/MW



90x90
ALGU10/1



170x90
ALGU10/2



250x90
ALGU10/3






GU10 LED



GU10 Halogen



AL

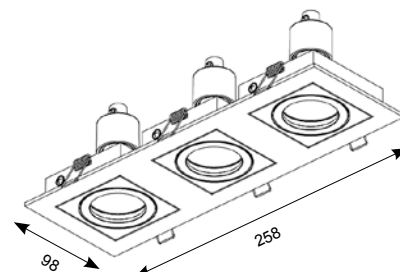



Depth less stirrup bracket: 24
Depth with stirrup fitted: 125

ALGU10/1	GU10	1 x 50W	BS
ALGU10/2	GU10	2 x 50W	BS
ALGU10/3	GU10	3 x 50W	BS

ALGU10/1/MW	GU10	1 x 50W	MW
ALGU10/2/MW	GU10	2 x 50W	MW
ALGU10/3/MW	GU10	3 x 50W	MW

IP65 GU10/MR16 Die-Cast Bathroom Downlight



121




ABD/W



ABD/CH




ABD/SC



ABD/W	GU10/MR16	50W	W
ABD/CH	GU10/MR16	50W	CH
ABD/SC	GU10/MR16	50W	SC

Converter Kit Low Voltage and GU10




ACP/W




ACP/CH




ACP/SC

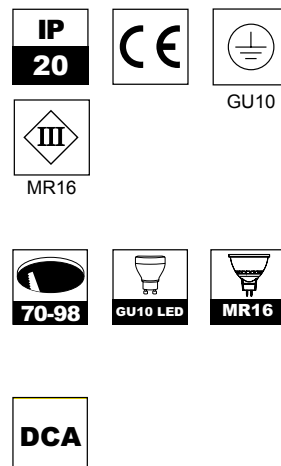

ACP/W	MR16 or GU10	50W	● W
ACP/CH	MR16 or GU10	50W	● CH
ACP/SC	MR16 or GU10	50W	● SC



Fire Hoods



ADLC/*

Al seleccionar el tamaño de fuego requerido, asegúrese que deja los siguientes espacios libres mínimos requeridos alrededor del foco:


*Horizontal: 40 mm
Vertical: 15mm*



ADLC

	A	B
ADLC/0	150 x 120	
ADLC/1	130 x 70	
ADLC/2	130 x 100	
ADLC/4	180 x 130	
ADLC/5	180 x 170	
ADLC/6	260 x 120	
ADLC/7	260 x 230	
ADLC/8	300 x 170	
ADLC/9	350 x 230	

Portalámparas

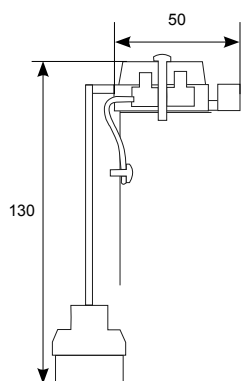

ASGU10L



ASGU10L

ASGU10L	GU10 Lampholder
----------------	-----------------

Circuito simple

Sistema de orugas y superficies con ajuste push y conexión de bloqueo


GU10 Mains Voltage
Track Pack

111



Mains Track and
Accessories

113

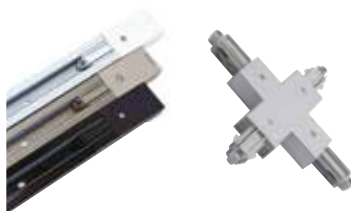

Unity 0 LED Mains

117



Unity 1 LED Mains

118



Unity 2 LED Mains

119



Unity 3 LED Mains

121



Unity 4 LED Mains

122



Unity Wallwash LED
Mains

124



Como 50W GU10 Mains

126



Dara 50W GU10 Mains

127



Zita 50W GU10 Mains

128





Lanzia 50W GU10 Mains

129



Single Circuit GU10 Mains Voltage Track Pack


125



AMTP1/W



AMTP1/SS

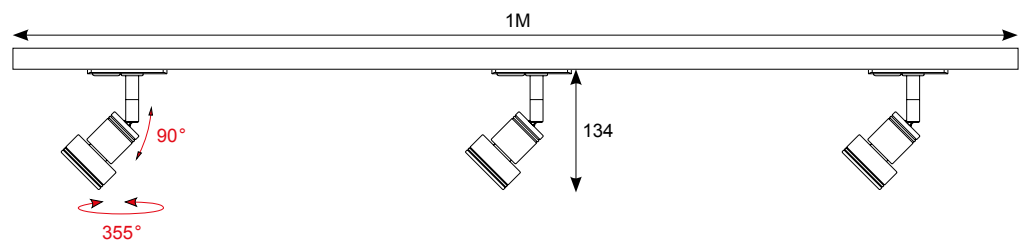

AMTP1/W	GU10	3 x 50W	W
AMTP1/SS	GU10	3 x 50W	SS



Mains Voltage 16A Single Circuit Track


Circuito simple



127




DCA

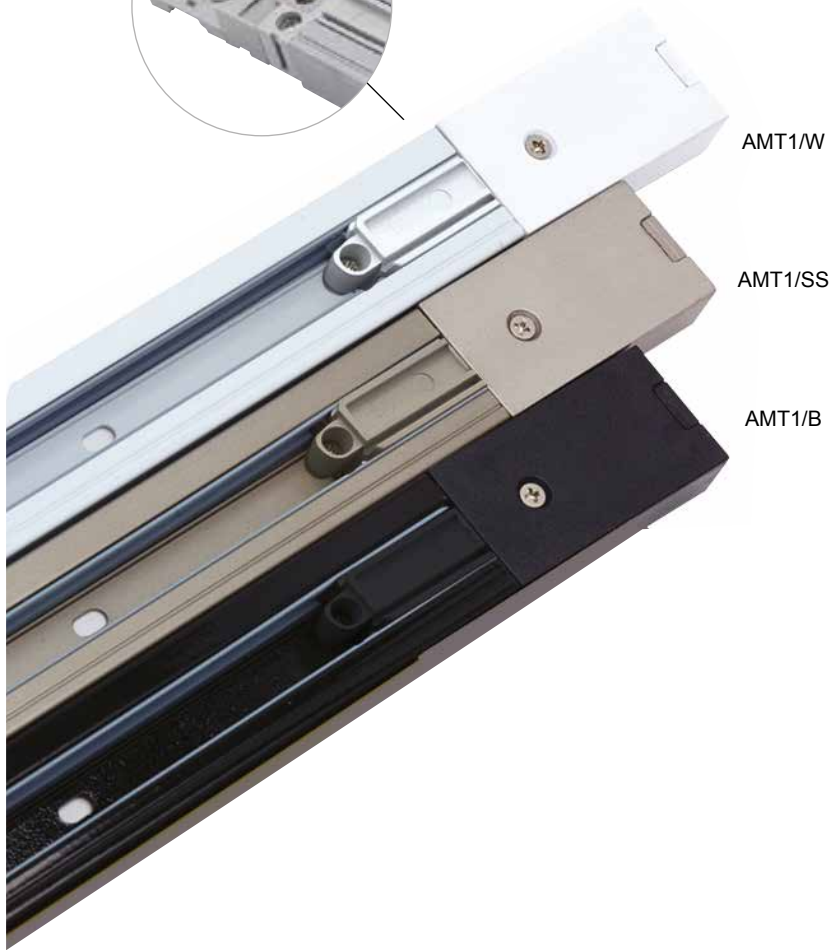

AMTLE/PL/SS



AMTDE/SS



1m	AMT1/W	W
	AMT1/B	B
	AMT1/SS	SS

2m	AMT2/W	W
	AMT2/B	B
	AMT2/SS	SS

Acesorios

2m	AMTINS/W	W
	AMTINS/B	B
	AMTINS/SS	SS



Mains Voltage 16A Single Circuit Track Accessories



Flexible incoming wiring access



Extremo con corriente:
toma de tierra izquierda

AMTLE/PL/W	W
AMTLE/PL/B	B
AMTLE/PL/SS	SS



Extrémité sous tension
- Mise à la terre à droite

AMTLE/PR/W	W
AMTLE/PR/B	B
AMTLE/PR/SS	SS



Conector de tope

AMTBC/W	W
AMTBC/B	B
AMTBC/SS	SS



Conector recto

AMTSC/W	W
AMTSC/B	B
AMTSC/SS	SS



Extremo sin corriente

AMTXC/W	W
AMTXC/B	B
AMTXC/SS	SS

AMTDE/W	W
AMTDE/B	B
AMTDE/SS	SS



AULEDS3/SS

Mains Voltage 16A Single Circuit Track Accessories



129



Conector L: toma de tierra dentro

AMTLC/PI/W	W
AMTLC/PI/B	B
AMTLC/PI/SS	SS



Conector L: toma de tierra fuera

AMTLC/PO/W	W
AMTLC/PO/B	B
AMTLC/PO/SS	SS



Adaptador de rail de 6A con abrazadera para el cable

AMTTC/PI/W	W
AMTTC/PI/B	B
AMTTC/PI/SS	SS

Conector T: toma de tierra fuera

AMTTC/PO/W	W
AMTTC/PO/B	B
AMTTC/PO/SS	SS



Conector flexible

AMTFC/W	W
AMTFC/B	B
AMTFC/SS	SS



Kit de suspensión

AMTSK



Monopunto de superficie

AMON/GU10/W	W
AMON/GU10/B	B
AMON/GU10/SS	SS

(Diameter 120mm x Depth 25mm)

Sistema de planificación para raíles de circuito simple



AMTLE/PL/




AMTLE/PR/



AMTLC/PO/




AMTLC/PI/






AMTTC/PI/



AMTTC/PO/

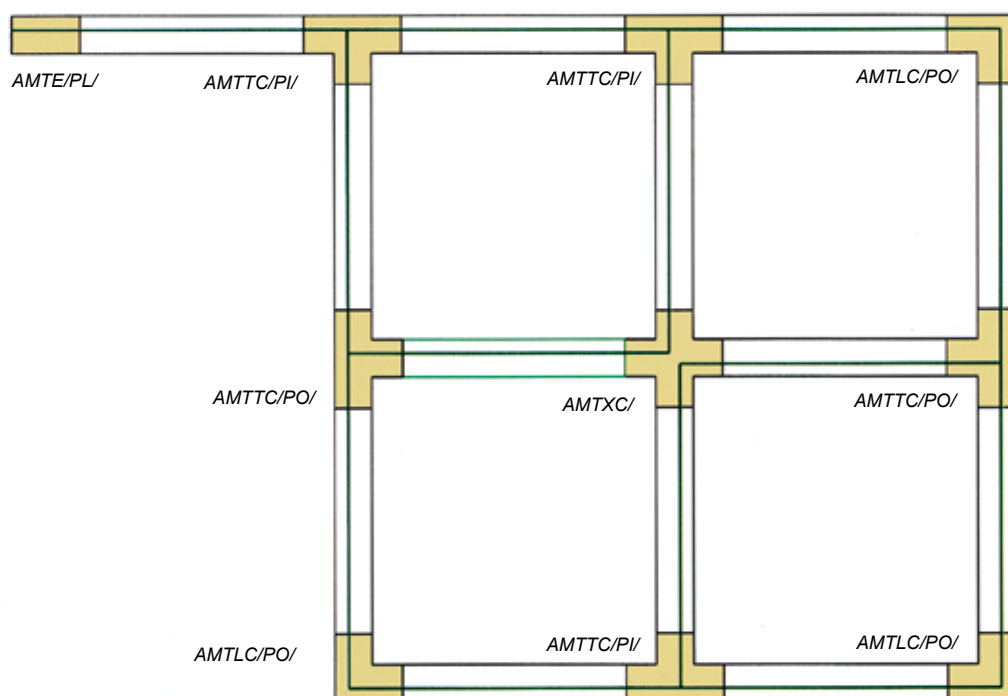

Single Circuit Unity 0 LED Mains

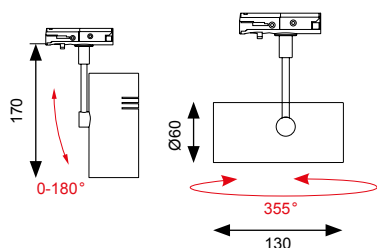

W	10W
Lm/D	
4000K	691lm
3000K	629lm
Lm/W 4000K	69lm
Lm/W 3000K	63lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50Hz
Temp	-20°C to 25°C



131



AULEDS0/CW/W



AULEDS0/CW/B



AULEDS0/CW/SS

AULEDS0/CW/W	LED	10W 4000K	W
AULEDS0/CW/B	LED	10W 4000K	B
AULEDS0/CW/SS	LED	10W 4000K	SS

AULEDS0/WW/W	LED	10W 3000K	W
AULEDS0/WW/B	LED	10W 3000K	B
AULEDS0/WW/SS	LED	10W 3000K	SS

Acesorios

AMON/GU10/W	W
AMON/GU10/B	B
AMON/GU10/SS	SS

International: +44 (0) 1942 433343
Warrington: +44 (0) 1942 433333
Belfast: +44 (0) 2890 773750



Single Circuit Unity 1 LED Mains




AULEDS1/W



AULEDS1/B



AULEDS1/SS

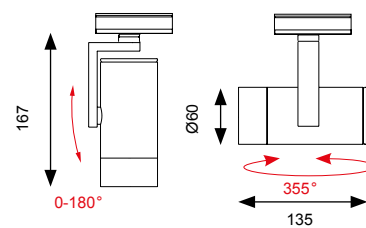

AULEDS1/W	LED	15W 4000K	W
AULEDS1/B	LED	15W 4000K	B
AULEDS1/SS	LED	15W 4000K	SS

AULEDS1/WW/W	LED	15W 3000K	W
AULEDS1/WW/B	LED	15W 3000K	B
AULEDS1/WW/SS	LED	15W 3000K	SS

Acesorios

AMON/GU10/W	W
AMON/GU10/B	B
AMON/GU10/SS	SS

W	15W
Lm/D	
4000K	941lm
3000K	938lm
Lm/W 4000K	63lm
Lm/W 3000K	63lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C



Single Circuit Unity 2 LED Mains

134



AULEDS2/W



Powered by
TRIDONIC
enlightening your ideas



AULEDS2/SS



AULEDS2/B

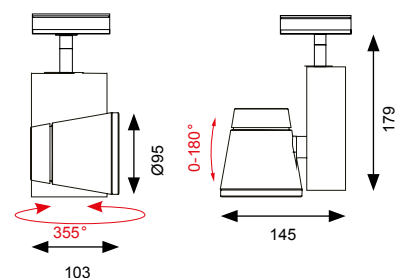

AULEDS2/W	LED	29W 4000K	W
AULEDS2/B	LED	29W 4000K	B
AULEDS2/SS	LED	29W 4000K	SS


AULEDS2/WW/W	LED	29W 3000K	W
AULEDS2/WW/B	LED	29W 3000K	B
AULEDS2/WW/SS	LED	29W 3000K	SS

Acesorios

AMON/GU10/W	W
AMON/GU10/B	B
AMON/GU10/SS	SS

W	29W
Lm/D	
4000K	2699lm
3000K	2497lm
Lm/W 4000K	93lm
Lm/W 3000K	86lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C

Single Circuit Unity 3 LED Mains

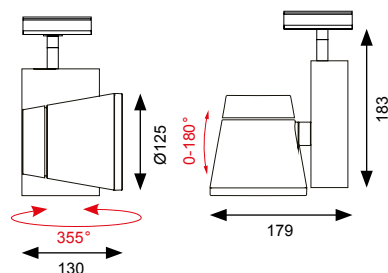

W	37W
Lm/D	
4000K	3239lm
3000K	2887lm
4000K Lm/W	88lm
3000K Lm/W	78lm
CRI	Ra 90
CCT	4000K 3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C



135



AULEDS3/W

Powered by
TRIDONIC
enlightening your ideas



AULEDS3/B



AULEDS3/SS

AULEDS3/W	LED	37W 4000K	W
AULEDS3/B	LED	37W 4000K	B
AULEDS3/SS	LED	37W 4000K	SS

AULEDS3/WW/W	LED	37W 3000K	W
AULEDS3/WW/B	LED	37W 3000K	B
AULEDS3/WW/SS	LED	37W 3000K	SS

Acesorios

AMON/GU10/W	W
AMON/GU10/B	B
AMON/GU10/SS	SS



Single Circuit Unity 4 LED Mains



AULEDS4/W



AULEDS4/B





AULEDS4/SS

AULEDS4/W	LED	42W 4000K	W
AULEDS4/B	LED	42W 4000K	B
AULEDS4/SS	LED	42W 4000K	SS

AULEDS4/WW/W	LED	42W 3000K	W
AULEDS4/WW/B	LED	42W 3000K	B
AULEDS4/WW/SS	LED	42W 3000K	SS

Acesorios

AMON/GU10/W	W
AMON/GU10/B	B
AMON/GU10/SS	SS

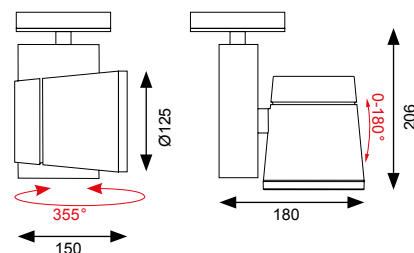


W	42W
Lm/D	
4000K	3922lm
3000K	3709lm
4000K Lm/W	93lm
3000K Lm/W	88lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C



Single Circuit Unity Wallwash LED Mains


138



AULEDSW/CW/W



AULEDSW/WW/B



AULEDSW/CW/W	LED	17W 4000K	W
AULEDSW/CW/B	LED	17W 4000K	B
AULEDSW/WW/W	LED	17W 3000K	W
AULEDSW/WW/B	LED	17W 3000K	B


Acesorios

AMON/GU10/W	W
AMON/GU10/B	B

W	17W
Lm/D	
4000K	529lm
3000K	487lm
Lm/W 4000K	31lm
Lm/W 3000K	28lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50Hz
Temp	-20°C to 25°C



Single Circuit Como 50W GU10 Mains



ACOGU10S/SS



ACOGU10S/W




ACOGU10S/B

ACOGU10S/W	GU10	50W	● W
ACOGU10S/B	GU10	50W	● B
ACOGU10S/SS	GU10	50W	● SS

Acesorios

AMON/GU10/W	● W
AMON/GU10/B	● B
AMON/GU10/SS	● SS



AMT1/**





AMON/GU10/**



Single Circuit Dara 50W GU10 Mains

141



ADGU10S/SS



ADGU10S/W



ADGU10S/B


ADGU10S/W	GU10	50W	● W
ADGU10S/B	GU10	50W	● B
ADGU10S/SS	GU10	50W	● SS

Acesorios

AMON/GU10/W	● W
AMON/GU10/B	● B
AMON/GU10/SS	● SS




Single Circuit Zita 50W GU10 Mains



AZGU10S/W

AZGU10S/SS



AMT1/**



AMON/GU10/**



AZGU10S/W	GU10	50W	● W
AZGU10S/SS	GU10	50W	● SS


Acesorios

AMON/GU10/W	● W
AMON/GU10/SS	● SS

AZTR/W	● W
AZTR/SS	● SS

Single Circuit Lanzia 50W GU10 Mains

143



ALGU10S/B



ALGU10S/SS



ALGU10S/W

AMT1/**



AMON/GU10/**



ALGU10S/W	GU10	50W	W
ALGU10S/B	GU10	50W	B
ALGU10S/SS	GU10	50W	SS

Acesorios

AMON/GU10/W	W
AMON/GU10/B	B
AMON/GU10/SS	SS



Circuito triple

Sistema de orugas y superficies con ajuste push y conexión de bloqueo

Mains Track and Accessories



131

Unity 0 LED Mains



135

Unity 1 LED Mains



136

Unity 2 LED Mains



137

Unity 3 LED Mains



138

Unity 4 LED Mains



139

Mains Voltage 16A Three Circuit Track



145




DCA



A/3MTLE/PL/SS



A/3MTDE/SS



1m	A/3MT1/W	W
	A/3MT1/B	B
	A/3MT1/SS	SS


2m	A/3MT2/W	W
	A/3MT2/B	B
	A/3MT2/SS	SS

Acesorios

2m	AMTINS/W	W
	AMTINS/B	B
	AMTINS/SS	SS



Mains Voltage 16A Three Circuit Track Accessories



Extremo con corriente:
toma de tierra izquierda

A/3MTLE/PL/W	W
A/3MTLE/PL/B	B
A/3MTLE/PL/SS	SS



Extrémité sous tension
- Mise à la terre à droite

A/3MTLE/PR/W	W
A/3MTLE/PR/B	B
A/3MTLE/PR/SS	SS



Conector de tope

A/3MTBC/W	W
A/3MTBC/B	B
A/3MTBC/SS	SS



Conector recto

A/3MTSC/W	W
A/3MTSC/B	B
A/3MTSC/SS	SS

Conector X

A/3MTXC/W	W
A/3MTXC/B	B
A/3MTXC/SS	SS



Extremo sin corriente

A/3MTDE/W	W
A/3MTDE/B	B
A/3MTDE/SS	SS

Mains Voltage 16A Three Circuit Track Accessories



147



Conector L: toma de tierra dentro

A/3MTLC/PI/W	W
A/3MTLC/PI/B	B
A/3MTLC/PI/SS	SS



Conector L: toma de tierra fuera

A/3MTLC/PO/W	W
A/3MTLC/PO/B	B
A/3MTLC/PO/SS	SS



Adaptador de rail de 6A con abrazadera para el cable

A/3MTTC/PI/W	W
A/3MTTC/PI/B	B
A/3MTTC/PI/SS	SS

Conector T: toma de tierra fuera

A/3MTTC/PO/W	W
A/3MTTC/PO/B	B
A/3MTTC/PO/SS	SS



Conector flexible

A/3MTA/W	W
A/3MTA/B	B
A/3MTA/SS	SS

A/3MTFC/W	W
A/3MTFC/B	B
A/3MTFC/SS	SS



Kit de suspensión

A/3MTSK



Monopunto de superficie

A/3MON/GU10/W	W
A/3MON/GU10/B	B
A/3MON/GU10/SS	SS

(Diameter 125mm x Depth 32mm)

Sistema de planificación para raíles de circuito triple

148



A/3MTLE/PL




A/3MTLE/PR




A/3MTLC/PO




A/3MTLC/PI





A/3MTTC/PI



A/3MTTC/PO

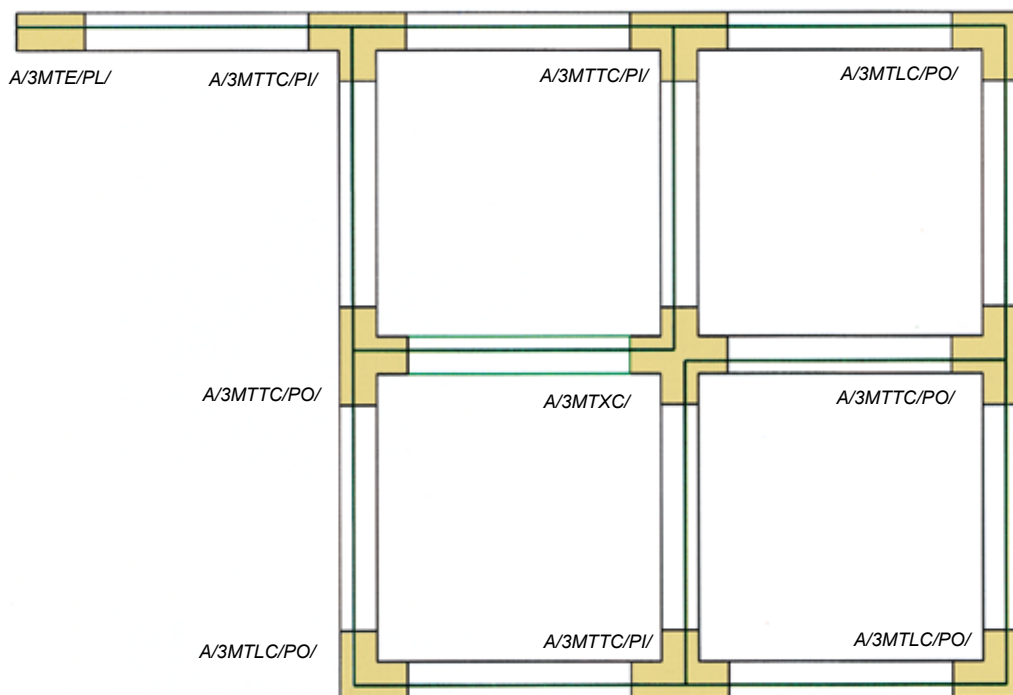

Three Circuit Unity 0 LED Mains



W	10W
Lm/D	
4000K	691lm
3000K	629lm
Lm/W 4000K	69lm
Lm/W 3000K	63lm
CRI	Ra 90
CCT	4000K 3000K
V	220V-240V
Hz	50Hz
Temp	-20°C to 25°C



149



A/3ULEDS0/CW/W



A/3ULEDS0/CW/B



A/3ULEDS0/CW/SS

A/3ULEDS0/CW/W	LED	10W 4000K	W
A/3ULEDS0/CW/B	LED	10W 4000K	B
A/3ULEDS0/CW/SS	LED	10W 4000K	SS

A/3ULEDS0/WW/W	LED	10W 3000K	W
A/3ULEDS0/WW/B	LED	10W 3000K	B
A/3ULEDS0/WW/SS	LED	10W 3000K	SS




Acesorios

A/3MON/GU10/W	W
A/3MON/GU10/B	B
A/3MON/GU10/SS	SS



Three Circuit Unity 1 LED Mains

150

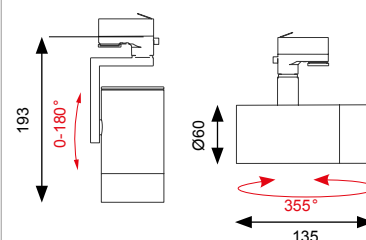

W	15W
Lm/D	
4000K	946lm
3000K	938lm
Lm/W 4000K	63lm
Lm/W 3000K	63lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C

Powered by

HEP

A/3ULEDS1/W

A/3ULEDS1/B

A/3ULEDS1/SS




A/3ULEDS1/W	LED	15W 4000K	W
A/3ULEDS1/B	LED	15W 4000K	B
A/3ULEDS1/SS	LED	15W 4000K	SS

A/3ULEDS1/WW/W	LED	15W 3000K	W
A/3ULEDS1/WW/B	LED	15W 3000K	B
A/3ULEDS1/WW/SS	LED	15W 3000K	SS

Acesorios

A/3MON/GU10/W	W
A/3MON/GU10/B	B
A/3MON/GU10/SS	SS

Three Circuit Unity 2 LED Mains

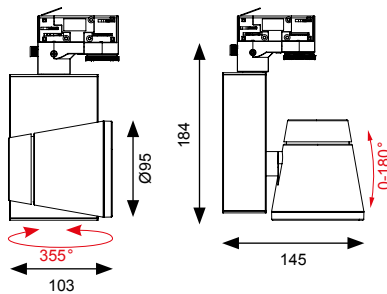

W	29W
Lm/D	
4000K	2699lm
3000K	2497lm
Lm/W 4000K	93lm
Lm/W 3000K	86lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C



151



A/3ULEDS2/W

Powered by
TRIDONIC
enlightening your ideas



A/3ULEDS2/B



A/3ULEDS2/SS

A/3ULEDS2/W	LED	29W 4000K	W
A/3ULEDS2/B	LED	29W 4000K	B
A/3ULEDS2/SS	LED	29W 4000K	SS

A/3ULEDS2/WW/W	LED	29W 3000K	W
A/3ULEDS2/WW/B	LED	29W 3000K	B
A/3ULEDS2/WW/SS	LED	29W 3000K	SS

Acesorios

A/3MON/GU10/W	W
A/3MON/GU10/B	B
A/3MON/GU10/SS	SS



Three Circuit Unity 3 LED Mains



A/3ULEDS3/W

Powered by
TRIDONIC
enlightening your ideas



A/3ULEDS3/B






A/3ULEDS3/SS

A/3ULEDS3/W	LED	37W 4000K	● W
A/3ULEDS3/B	LED	37W 4000K	● B
A/3ULEDS3/SS	LED	37W 4000K	● SS

A/3ULEDS3/WW/W	LED	37W 3000K	● W
A/3ULEDS3/WW/B	LED	37W 3000K	● B
A/3ULEDS3/WW/SS	LED	37W 3000K	● SS



Acesorios

A/3MON/GU10/W	● W
A/3MON/GU10/B	● B
A/3MON/GU10/SS	● SS

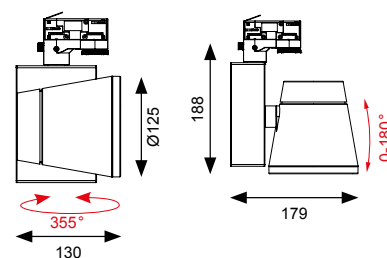

W	37W
Lm/D	
4000K	3239lm
3000K	2887lm
4000K Lm/W	88lm
3000K Lm/W	78lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C

Three Circuit Unity 4 LED Mains

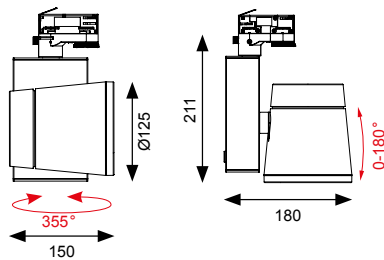

W	42W
Lm/D	
4000K	3922lm
3000K	3709lm
4000K Lm/W	93lm
3000K Lm/W	88lm
CRI	Ra 90
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 25°C



153



A/3ULEDS4/W



A/3ULEDS4/B



A/3ULEDS4/SS

A/3ULEDS4/W	LED	42W 4000K	W
A/3ULEDS4/B	LED	42W 4000K	B
A/3ULEDS4/SS	LED	42W 4000K	SS

A/3ULEDS4/WW/W	LED	42W 3000K	W
A/3ULEDS4/WW/B	LED	42W 3000K	B
A/3ULEDS4/WW/SS	LED	42W 3000K	SS

Acesorios

A/3MON/GU10/W	W
A/3MON/GU10/B	B
A/3MON/GU10/SS	SS



Unity 0 Surface LED Mains

154



ASSULED0/CW/W




ASSULED0/CW/B



ASSULED0/CW/SS

ASSULED0/CW/W	LED	10W 4000K	W
ASSULED0/CW/B	LED	10W 4000K	B
ASSULED0/CW/SS	LED	10W 4000K	SS


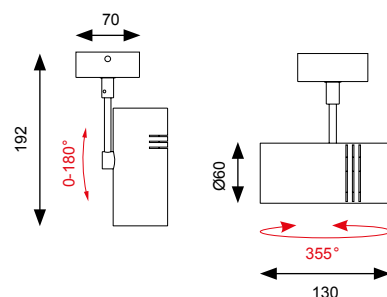


W	10W
Lm/D	691lm
Lm/W	69lm
CRI	Ra 90
CCT	4000K
V	220V-240V
Hz	50Hz
Temp	-20°C to 25°C




Druzy LED

156

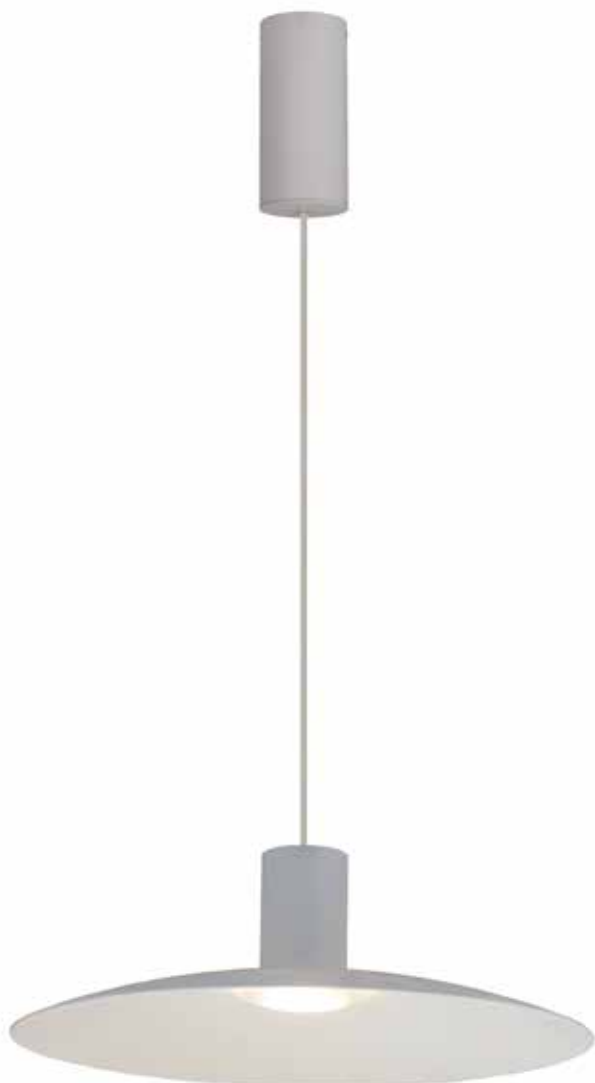



ADRLEDP/WW/W


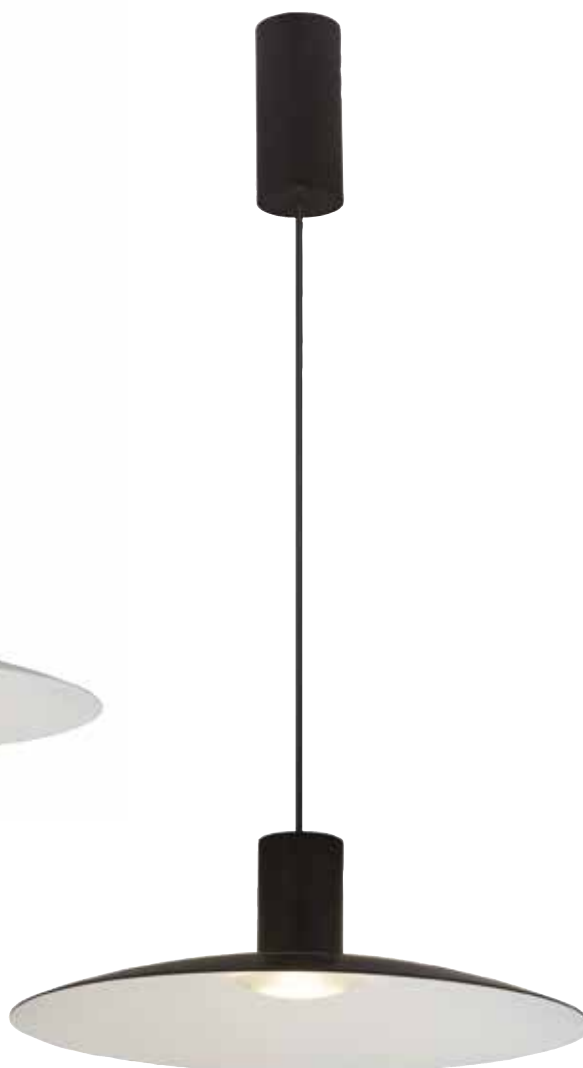


ADRLEDP/WW/B


ADRLEDP/WW/W	LED	11.6W 3000K	 W
ADRLEDP/WW/B	LED	11.6W 3000K	 B

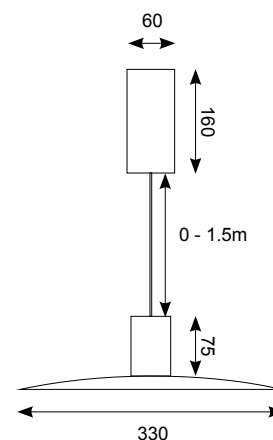

W	11.6W
Lm/D	734lm
Lm/W	61lm
CRI	Ra 90
CCT	3000K
V	220V-240V
Hz	50-60Hz
Temp	-10°C to 30°C

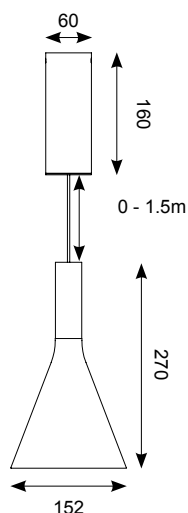

AJSLEDP/WW/W

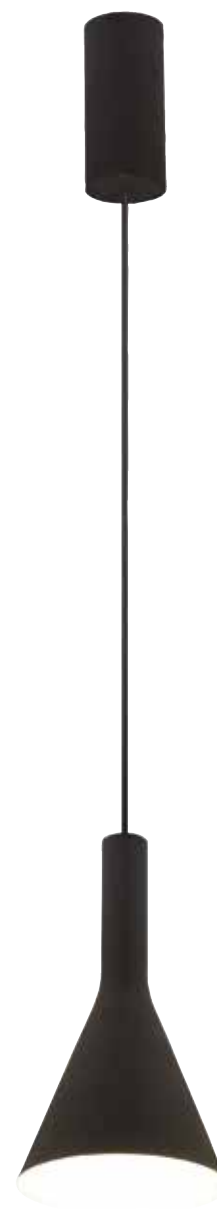


AJSLEDP/WW/B

W	10W
Lm/D	452lm
Lm/W	45lm
CRI	Ra 93
CCT	3000K
V	230V
Hz	50-60Hz
Temp	-10°C to 30°C

AJSLEDP/WW/W	LED	10W 3000K	W
AJSLEDP/WW/B	LED	10W 3000K	B

Jade LED

158




Powered by


HEP



AJLEDP/WW/W




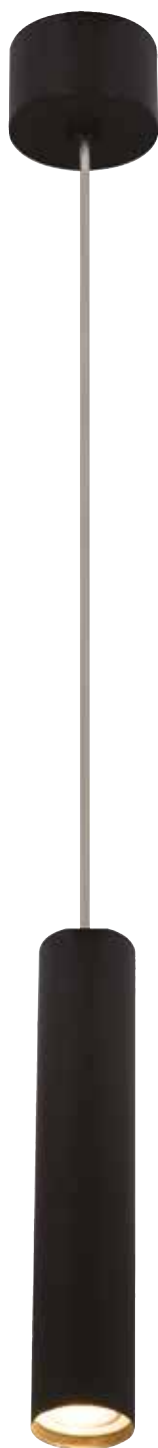


AJLEDP/WW/B

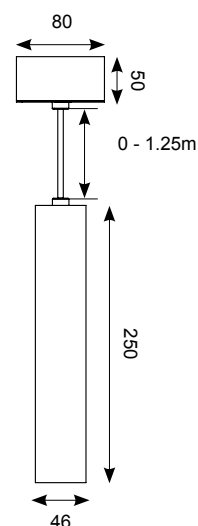

AJLEDP/WW/W	LED	7W 3000K	W
AJLEDP/WW/B	LED	7W 3000K	B

W	7W
Lm/D	512lm
Lm/W	73lm
CRI	Ra 80
CCT	3000K
V	230V
Hz	50Hz
Temp	-20°C to 25°C

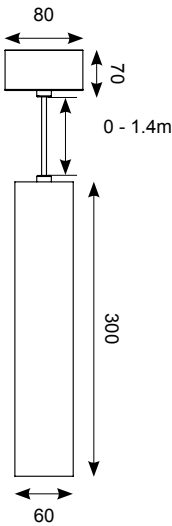

ARULEDP/WW/W



ARULEDP/WW/B


W	16W
Lm/D	1029lm
Lm/W	64lm
CRI	Ra 80
CCT	3000K
V	230V
Hz	50Hz
Temp	-20°C to 25°C

ARULEDP/WW/W	LED	16W 3000K	W
ARULEDP/WW/B	LED	16W 3000K	B



Secco LED

160






ASEC/G125/BLC



ASEC/G125/AB

Opciones de suspensión

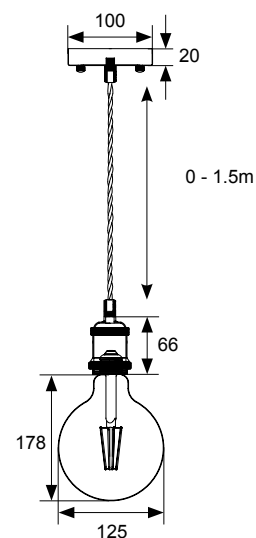
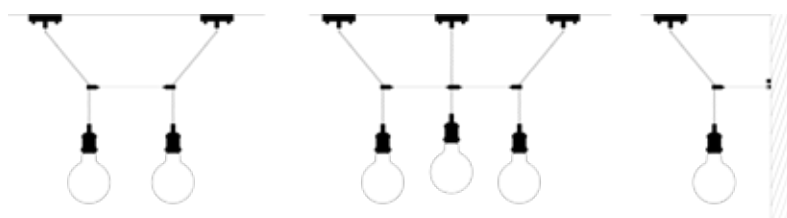


ASEC/G125/BLC	LED	7.5W 2500K	 BLC
ASEC/G125/AB	LED	7.5W 2500K	 AB

Acesorios

ALED/6W/G125/2500K	Lamp
---------------------------	------

W	7.5W
Lm/D	779lm
CRI	Ra 80
CCT	2500K
V	230V
Hz	50Hz

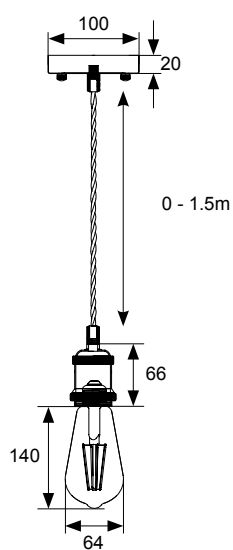


ASEC/ST64/AB



ASEC/ST64/BLC

Opciones de suspensión

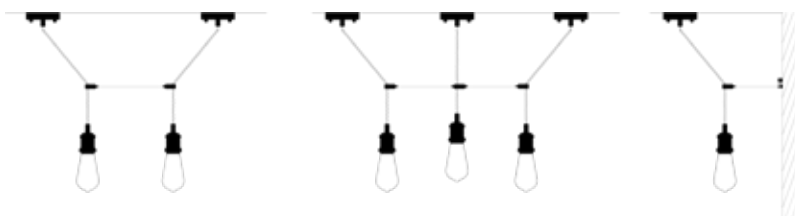



W	7.5W
Lm/D	696lm
CRI	Ra 80
CCT	2500K
V	230V
Hz	50Hz

ASEC/ST64/BLC	LED	7.5W 2500K	 BLC
ASEC/ST64/AB	LED	7.5W 2500K	 AB

Acesorios

ALED/6W/ST64/2500K	Lamp
--------------------	------



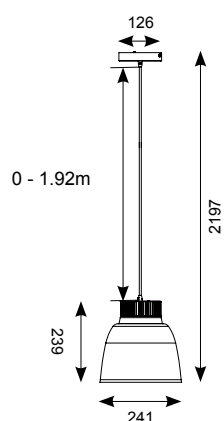

W	21W 40W
Lm/D	
21W	1784lm
40W	3595lm
Lm/W 21W	85lm
Lm/W 40W	90lm
CRI	Ra 80
CCT	3000K
V	230V
Hz	50-60Hz
Temp	-20°C to 35°C

ADEPLED	LED	21W 3000K
ADEPLED/HP	LED	40W 3000K

Deco High Bay LED

164






ADHBLED1/PC

Powered by
TRIDONIC
enlightening your ideas



ADHBLED2/ALU

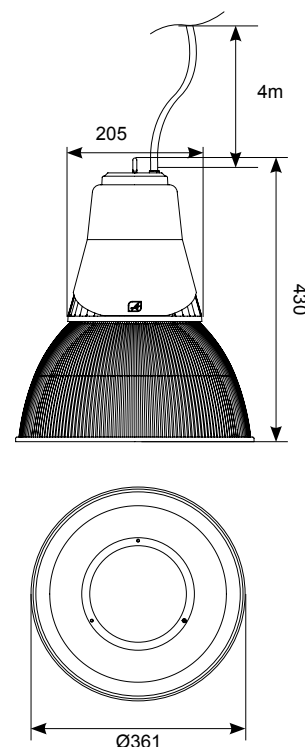

ADHBLED1/PC	LED	41W	POLY
ADHBLED2/PC	LED	96W	POLY

ADHBLED1/ALU	LED	41W	AL
ADHBLED2/ALU	LED	96W	AL

/DD		(DD1/DD2/DD3/DD4)
-----	--	-------------------

Acesorios

ADHBLED/PC/BC	PC Bottom Cover (360mm)
ADHBLED/SK	Suspension Kit

W	41W	96W
Lm/D		
/ALU	4760lm	10437lm
/PC	4678lm	10375lm
Lm/W		
/ALU	114lm	109lm
/PC	116lm	108lm
CRI	Ra 80	
CCT	4000K	
V	230V	
Hz	50/60Hz	
Temp	-20°C to 25°C	



Instalación con montura de gancho

DCA

ST

DCA

 **LUMILEDS**

AL

POLY

AL

POLY

Powered by
TRIDONIC
▼ enlightening your ideas



Lente de Fresnel texturizada para optimizar
la salida y uniformidad de la luz



Elite LED




Soporte de instalación inclinable y ajustable

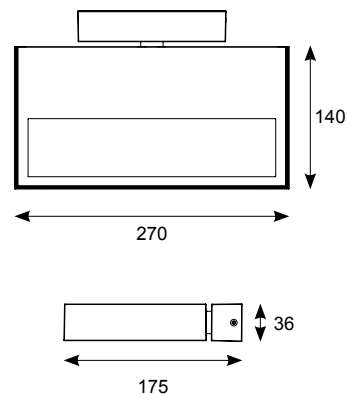

W	33W
Lm/W	
4000K	2549lm
3000K	2122lm
Lm/W	
4000K	77lm
3000K	64lm
CRI	Ra 90
CCT	4000K
	3000K
V	230V
Hz	50Hz
Temp	-20°C to 25°C

AELLED/WL/CW LED 33W 4000K

AELLED/WL/WW LED 33W 3000K


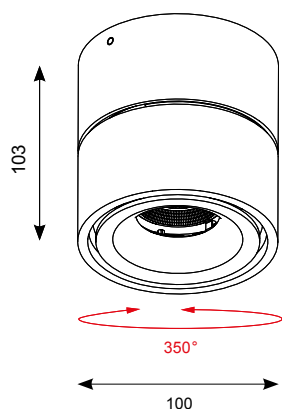


W	9W
Lm/D	645lm
Lm/W	72lm
CRI	Ra 80
CCT	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 40°C



AUNIVLED	LED	9W 3000K
----------	-----	----------



Riola

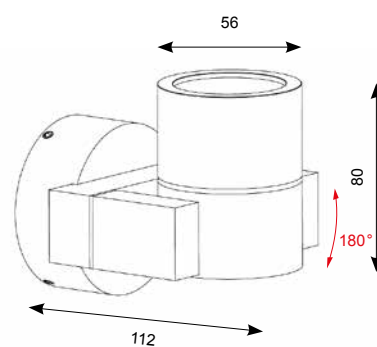

ARGU10

GU10

35W

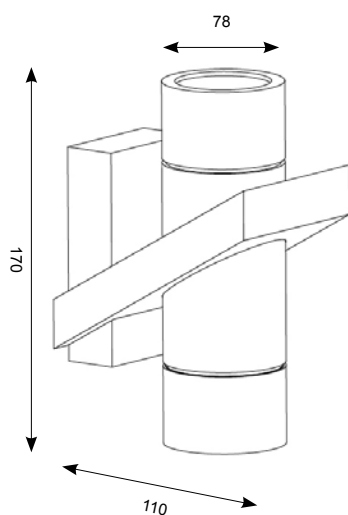

ACO2X35

GU10

2x35W

Mitre LED

170





AFAMIWL/BASE + AMIFC/W



AFAMIWL/BASE + AMIFC/OAK




AFAMIWL/BASE + AMIFC/WAL



AFAMIWL/BASE	LED	9W 3000K
Acesorios		
AMIFC/W	W	
AMIFC/OAK	OAK	
AMIFC/WAL	WAL	

W	9W
Lm/D	680lm
Lm/W	76lm
CRI	Ra 90
CCT	3000K
V	220V-240V
Hz	50-60Hz
Temp	-10°C to 30°C




AFAMIWL/BASE + AFAFC/W



AFAMIWL/BASE + AFAFC/OAK



AFAMIWL/BASE + AFAFC/WAL

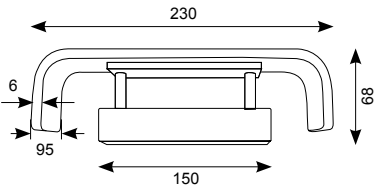


W	9W
Lm/D	680lm
Lm/W	76lm
CRI	Ra 90
CCT	3000K
V	220V-240V
Hz	50-60Hz
Temp	-10°C to 30°C

AFAMIWL/BASE	LED	9W -3000K
Acesorios		
AFAFC/W		W
AFAFC/OAK		OAK
AFAFC/WAL		WAL




Facet LED

172


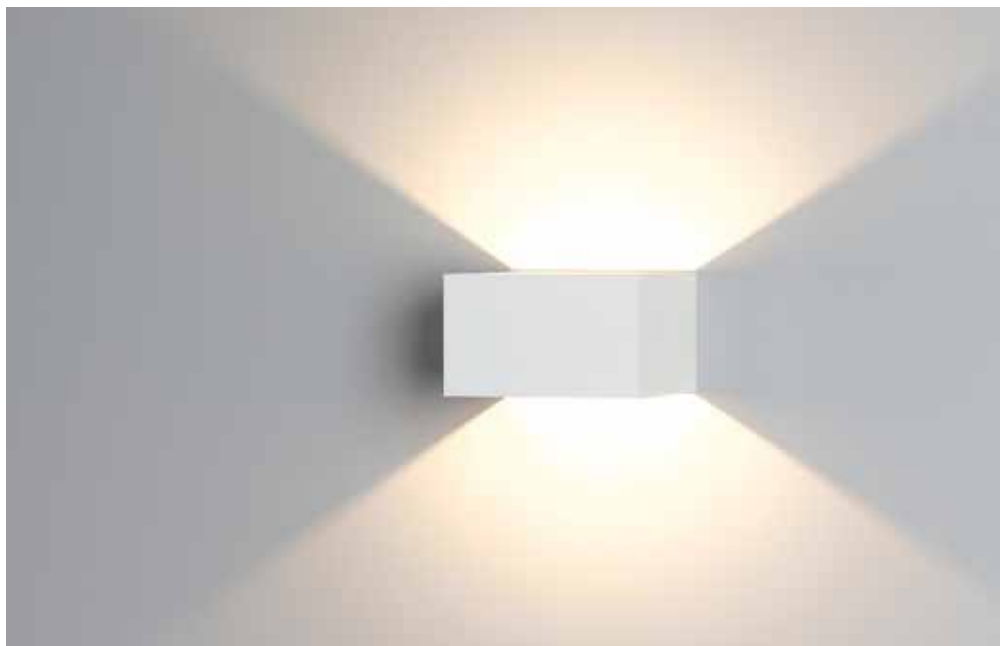


AFWLED/W

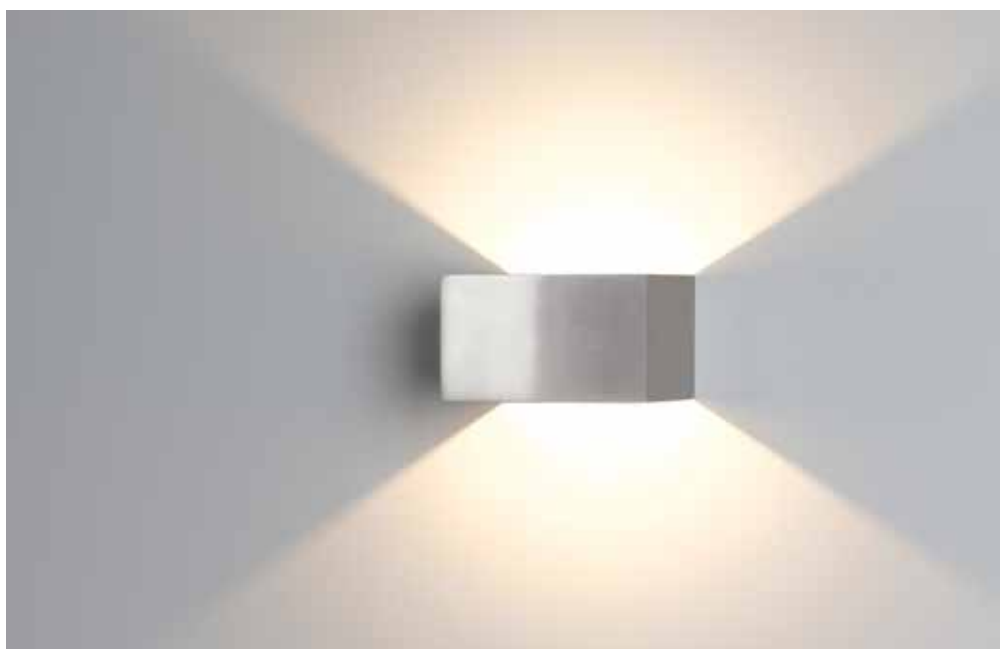


AFWLED/SC

AFWLED/W	LED	6.5W 3000K	 W
AFWLED/SC	LED	6.5W 3000K	 SC





W	6.5W
Lm/D	183lm
Lm/W	46lm
CRI	Ra 93
CCT	3000K
V	100V-240V
Hz	50-60Hz
Temp	-20°C to 45°C

Spectrum LED Gooseneck Wall Light



173



W	2W
Lm/D	29lm
Lm/W	15lm
CRI	Ra 80
CCT	3000K
V	100V-240V
Hz	50-60Hz
Temp	-10°C to 30°C

ASPGN/1LED/WHI LED 2W 3000K ● SS



LED Drivers

Constant Voltage Non-Dimmable



Voltaje constante a 12 V



AD30W/12V



AD75W/12V

Voltaje constante a 24 V



ADK15W/24V



ADK60W/24V



ADK120W/24V

IP
65



ADK200W/24V

IP
65



ADK320W/24V

			A	B	C
12V	AD30W/12V	30W	166	24	52
	AD75W/12V	75W	180	30	52
24V	ADK15W/24V	15W	123	45	19
	ADK60W/24V	60W	180	52	36
	ADK120W/24V	120W	300	40	30
	ADK200W/24V	200W	207	37	68.5
	ADK320W/24V	320W	249	40	70

A = L B = H C = W



DIM




LED Drivers


Constant Current Non-Dimmable




175




AD3W/350



AD9W/350

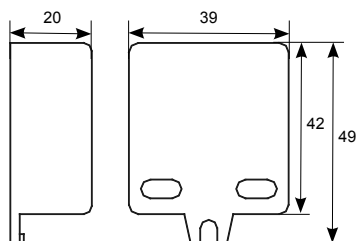

AD3W/700



ADK20W/350
ADK12W/700
ADK20W/700



AD3W/350



AD9W/350



ADK20W/350



AD3W/700



ADK12W/700



ADK20W/700

			A	B	C
350mA	AD3W/350	1-3W 350mA	56	20	39
	AD9W/350	1-9W 350mA	85	22	40
	ADK20W/350	6W-20W 350mA	123	45	19
700mA	AD3W/700	1-3W 700mA	56	20	39
	ADK12W/700	3W-12W 700mA	123	45	19
	ADK20W/700	6W-20W 700mA	123	45	19

A = L B = H C = W



12V LED Triac Dimmable Drivers



ADDIM50W/12V



ADDIM100W/12V

Code	Description	A	B	C	D
ADDIM50W/12V	50W	166	24	52	174
ADDIM100W/12V	100W	210	34	67	220

A = Length B = Height C = Width D = Fixing Centres


12V LED 1-10V and Switch Dim Dimmable Driver




ADDIM75W/12V

Code	Description	A	B	C	D
ADDIM75W/12V	75W	220	42	58	190

A = Length B = Height C = Width D = Fixing Centres

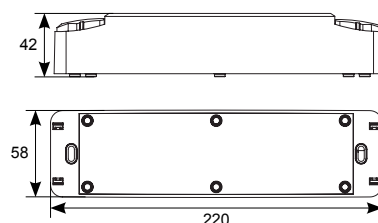


Multicurrent and Voltage Dimmable



177




AMCD25W



AMCD25W



AMCD50W



AMCD50W

Code	350mA	500mA	700mA	900mA	1050mA	10V	12V	24V	48V
AMCD25W	0-15W	0-22W	0-25W			0-9W	0-10W	0-20W	
AMCD50W	0-25W	0-35W	0-50W	0-50W	0-50W				0-50W

Code	Description	A	B	C	D
AMCD25W	25W	103	21	67	94
AMCD50W	50W	125	22	79	111

A = Length B = Height C = Width D = Fixing Centres



Aluminium Profiles for LED Strip

178



AALU/SP/CO



AALU/AP/CO



AALU/RP/CO



AALU/SP/CO

2 Metre

AALU/AP/CO

2 Metre


AALU/RP/CO

2 Metre


IP
20

CE


AL



AALU/SP/CO



AALU/AP/CO



AALU/RP/CO





LED Strip Made Easy...



Paso 1:

Pelar el adhesivo de nuevo de la tira LED y colocar hacia abajo en una superficie limpia y uniforme, asegurando que toda la longitud está firmemente pegada.



Paso 2:

Utilizando las conexiones plug y play, conecte el extremo de la tira LED a un cable de red (se vende por separado).



Paso 3:

Conecte el cable de red al controlador LED (el controlador dependerá de la longitud de la tira LED que se instala por separado) y asegúrese de que el controlador LED esté conectado a la red eléctrica.



Paso 4:

Encienda la alimentación y disfrute de su nueva iluminación de tira LED.



No Se requieren Herramientas

Todas nuestras gamas de tiras LED se suministran con un de nuevo, lo que significa que no se requiere ningún adhesivo o fijaciones para aplicar la tira para limpiar las superficies secas. Además, todas las tiras están con conexiones plug and play, por lo que no hay soldadura o herramientas necesario, ayudando aún



Longitudes Pre-cortadas

La tira viene en varias longitudes pre-cortadas de 100mm a 5 metros, ofreciendo una versatilidad completa y asegurando una instalación rápida y fácil. Esto, junto con puntos de corte designados permite una flexibilidad total para cada instalación.



Personalización Completa



La amplia gama de diferentes opciones de tiras es complementada por una selección igualmente impresionante de accesorios. Nuestra amplia gama de conectores opciones permiten una fácil instalación incluso para los complejo de configuraciones.



Conectado

El controlador inteligente Bluetooth OCTO 12-24V proporciona a los usuarios con opciones para RGBW, RGB, blanco ajustable y color. Los ajustes son fácilmente comisionados por un dispositivo a través de la aplicación OCTO, esto incluye control total, atenuación, ajuste de escena y temporizadores preconfigurados.

Krait 24V LED Plug and Play Flexible Strip **7.2W per M**

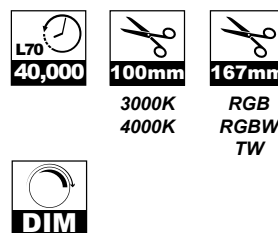

AKRLED/100/CW	LED	100mm - 4000K
AKRLED/100/WW	LED	100mm - 3000K
AKRLED/100/RGB	LED	170mm - RGB
AKRLED/100/RGBW	LED	170mm - RGBW
AKRLED/100/TW	LED	170mm - Tunable White


AKRLED/300/CW	LED	300mm - 4000K
AKRLED/300/WW	LED	300mm - 3000K
AKRLED/300/RGB	LED	330mm - RGB
AKRLED/300/RGBW	LED	330mm - RGBW
AKRLED/300/TW	LED	330mm - Tunable White

AKRLED/500/CW	LED	500mm - 4000K
AKRLED/500/WW	LED	500mm - 3000K
AKRLED/500/RGB	LED	500mm - RGB
AKRLED/500/RGBW	LED	500mm - RGBW
AKRLED/500/TW	LED	500mm - Tunable White

AKRLED/1000/CW	LED	1m - 4000K
AKRLED/1000/WW	LED	1m - 3000K
AKRLED/1000/RGB	LED	1m - RGB
AKRLED/1000/RGBW	LED	1m - RGBW
AKRLED/1000/TW	LED	1m - Tunable White

AKRLED/2000/CW	LED	2m - 4000K
AKRLED/2000/WW	LED	2m - 3000K
AKRLED/2000/RGB	LED	2m - RGB
AKRLED/2000/RGBW	LED	2m - RGBW
AKRLED/2000/TW	LED	2m - Tunable White

AKRLED/5000/CW	LED	5m - 4000K
AKRLED/5000/WW	LED	5m - 3000K
AKRLED/5000/RGB	LED	5m - RGB
AKRLED/5000/RGBW	LED	5m - RGBW
AKRLED/5000/TW	LED	5m - Tunable White

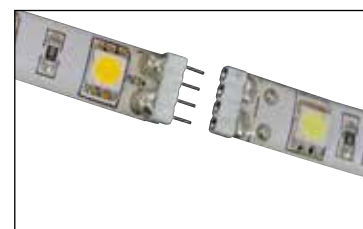

W	7.2W per m
Lm/D per m	
4000K	693lm
3000K	619lm
Lm/W 4000K	99lm
Lm/W 3000K	88lm
CRI	Ra 90
CCT	4000K
	3000K
	RGB
V	24V



ACLED/90B



ACLED/TC



ACLED/XC



AMLED/LC



ACLED/90/FB



ACLED/AMP/TOUCH



ACLED/RC/TOUCH



AOCTO/RGBW/BTC

ACLED/90B	90° Bend
ACLED/90/FB	90° Flat Bend
ACLED/TC	T Connector
ACLED/XC	X Connector

ACLED100/LL	100mm Link Lead (White and RGB)
ACLED500/LL	500mm Link Lead (White and RGB)
ACLED1000/LL	1000mm Link Lead (White and RGB)

ACLED/ML	1000mm Mains Lead
ACLED/ML/RGB	1000mm Mains Lead RGB
ABOLED/ML/TW	1000mm Mains Lead
ABOLED/ML/RGBW	1000mm Mains Lead RGB


ACLED/RC/TOUCH	Touch RGB RF Remote Control
ACLED/AMP/TOUCH	Touch RGB Amplifier (Repeater)

AMLED/LC	Flexible Quick-fit Joint
ABOLED/LC/RGBW	500mm Link Lead (RGBW)

AOCTO/RGBW/BTC	12 - 24V Single CCT/RGBW Controller
-----------------------	-------------------------------------

Controladores

ADK200W/24V	200W 24V Constant Voltage Driver
ADK320W/24V	320W 24V Constant Voltage Driver



Boa 24V LED Plug and Play Flexible Strip

13W per M
Supplied Less Driver

3000K
4000K

RGB
RGBW
TW


ABOLED/100/CW	LED	100mm - 4000K
ABOLED/100/WW	LED	100mm - 3000K
ABOLED/100/RGB	LED	100mm - RGB
ABOLED/100/RGBW	LED	100mm - RGBW
ABOLED/100/TW	LED	100mm - Tunable White


ABOLED/300/CW	LED	300mm - 4000K
ABOLED/300/WW	LED	300mm - 3000K
ABOLED/300/RGB	LED	300mm - RGB
ABOLED/300/RGBW	LED	300mm - RGBW
ABOLED/300/TW	LED	300mm - Tunable White

ABOLED/500/CW	LED	500mm - 4000K
ABOLED/500/WW	LED	500mm - 3000K
ABOLED/500/RGB	LED	500mm - RGB
ABOLED/500/RGBW	LED	500mm - RGBW
ABOLED/500/TW	LED	500mm - Tunable White


ABOLED/1000/CW	LED	1m - 4000K
ABOLED/1000/WW	LED	1m - 3000K
ABOLED/1000/RGB	LED	1m - RGB
ABOLED/1000/RGBW	LED	1m - RGBW
ABOLED/1000/TW	LED	1m - Tunable White

ABOLED/2000/CW	LED	2m - 4000K
ABOLED/2000/WW	LED	2m - 3000K
ABOLED/2000/RGB	LED	2m - RGB
ABOLED/2000/RGBW	LED	2m - RGBW
ABOLED/2000/TW	LED	2m - Tunable White

ABOLED/5000/CW	LED	5m - 4000K
ABOLED/5000/WW	LED	5m - 3000K
ABOLED/5000/RGB	LED	5m - RGB
ABOLED/5000/RGBW	LED	5m - RGBW
ABOLED/5000/TW	LED	5m - Tunable White

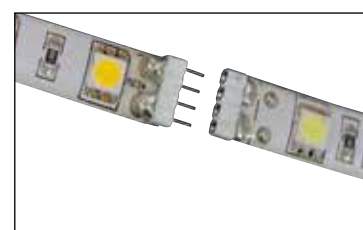


W	13W per m
Lm/D per m	
4000K	1203lm
3000K	1127lm
Lm/W 4000K	93lm
Lm/W 3000K	87lm
CRI	Ra 90
CCT	4000K
	3000K
	Tunable White
	RGB
	RGBW
V	24V



- **ACLED/RC/TOUCH**
RC = Max. 20m
- **ACLED/AMP/TOUCH**
AMP = 1 per 5m Length

- **AOCTO/RGBW/BTC**
12-24V Bluetooth Smart Controller



ACLED/90B



ACLED/TC



ACLED/XC



AMLED/LC



ACLED/90/FB



ACLED/AMP/TOUCH



ACLED/RC/TOUCH



AOCTO/RGBW/BTC

ACLED/90B	90° Bend
ACLED/90/FB	90° Flat Bend
ACLED/TC	T Connector
ACLED/XC	X Connector

ACLED100/LL	100mm Link Lead (White and RGB)
ACLED500/LL	500mm Link Lead (White and RGB)
ACLED1000/LL	1000mm Link Lead (White and RGB)

ACLED/ML	1000mm Mains Lead
ACLED/ML/RGB	1000mm Mains Lead RGB
ABOLED/ML/TW	1000mm Mains Lead
ABOLED/ML/RGBW	1000mm Mains Lead RGB

ACLED/RC/TOUCH	Touch RGB RF Remote Control
ACLED/AMP/TOUCH	Touch RGB Amplifier (Repeater)

AMLED/LC	Flexible Quick-fit Joint
ABOLED/LC/RGBW	500mm Link Lead (RGBW)


AOCTO/RGBW/BTC	12 - 24V Single CCT/RGBW Controller
-----------------------	-------------------------------------

Controladores

ADK200W/24V	200W 24V Constant Voltage Driver
ADK320W/24V	300W 24V Constant Voltage Driver

Adder LED

Plug and Play Flexible Strip **7.2W per M**



4000K



3000K



AADLED/100/CW	LED	100mm 4000K
AADLED/100/WW	LED	100mm 3000K
AADLED/100/RGB	LED	100mm RGB

AADLED/300/CW	LED	300mm 4000K
AADLED/300/WW	LED	300mm 3000K
AADLED/300/RGB	LED	300mm RGB

AADLED/500/CW	LED	500mm 4000K
AADLED/500/WW	LED	500mm 3000K
AADLED/500/RGB	LED	500mm RGB



AADLED/1000/CW	LED	1m 4000K
AADLED/1000/WW	LED	1m 3000K
AADLED/1000/RGB	LED	1m RGB

AADLED/2000/CW	LED	2m 4000K
AADLED/2000/WW	LED	2m 3000K
AADLED/2000/RGB	LED	2m RGB


AADLED/5000/CW	LED	5m 4000K
AADLED/5000/WW	LED	5m 3000K
AADLED/5000/RGB	LED	5m RGB




ADDIM75W/12V

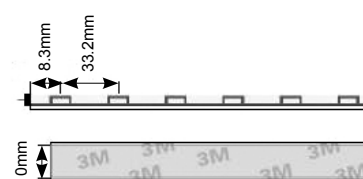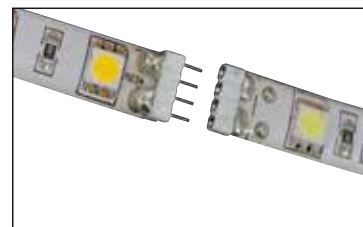

W	7.2W per m
Lm/D per m	
4000K	520lm
3000K	495lm
Lm/W 4000K	80lm
Lm/W 3000K	75lm
CRI	Ra 80
CCT	4000K
	3000K
	RGB
V	12V



- **ACLED/RC/TOUCH**
RC = Max. 20m
- **ACLED/AMP/TOUCH**
AMP = 1 per 5m Length
- **AOCTO/RGBW/BTC**
12-24V Bluetooth Smart Controller



ACLED100LL




ACLED/90



ACLED/TC



ACLED/XC



AMLED/LC



ACLED/90/FB



ACLED/RC/AMP



ACLED/RC/TOUCH



AOCTO/RGBW/BTC

ACLED/90B

ACLED/90/FB

ACLED/TC

ACLED/XC

ACLED100/LL

100mm 4000K/3000K/RGB

ACLED500/LL

500mm 4000K/3000K/RGB

ACLED1000/LL

1000mm 4000K/3000K/RGB

ACLED/ML

1000mm 4000K/3000K

ACLED/ML/RGB

1000mm RGB

ACLED/RC/TOUCH

Touch RGB RF Remote Control

ACLED/AMP/TOUCH

Touch RGB Amplifier (Repeater)

AMLED/LC

Flexible Quick-fit Joint

AOCTO/RGBW/BTC

12V - 24V Single CCT / RGB Controller

Controladores

AD30W/12V

30W 12V Constant Voltage Driver

AD75W/12V


75W 12V Constant Voltage Driver

ADDIM75W/12V

75W 12V Dimmable (1-10V or Switch Dim)

Cobra LED

Plug and Play Flexible Strip **14.4W per m**



4000K



3000K



ACLED/100/CW	LED	100mm 4000K
ACLED/100/WW	LED	100mm 3000K
ACLED/100/RGB	LED	100mm RGB

ACLED/300/CW	LED	300mm 4000K
ACLED/300/WW	LED	300mm 3000K
ACLED/300/RGB	LED	300mm RGB

ACLED/500/CW	LED	500mm 4000K
ACLED/500/WW	LED	500mm 3000K
ACLED/500/RGB	LED	500mm RGB



ACLED/1000/CW	LED	1 Metre 4000K
ACLED/1000/WW	LED	1 Metre 3000K
ACLED/1000/RGB	LED	1 Metre RGB

ACLED/2000/CW	LED	2 Metre 4000K
ACLED/2000/WW	LED	2 Metre 3000K
ACLED/2000/RGB	LED	2 Metre RGB


ACLED/5000/CW	LED	5 Metre 4000K
ACLED/5000/WW	LED	5 Metre 3000K
ACLED/5000/RGB	LED	5 Metre RGB




ADDIM75W/12V

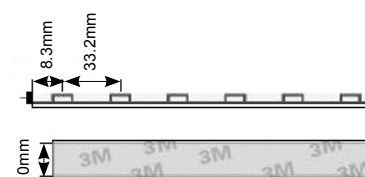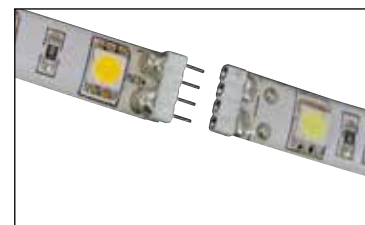

W	14.4W per m
Lm/D per m	
4000K	1000lm
3000K	950lm
Lm/W 4000K	76lm
Lm/W 3000K	73lm
CRI	Ra 80
CCT	4000K
	3000K
	RGB
V	12V



- **ACLED/RC/TOUCH**
RC = Max. 20m
- **ACLED/AMP/TOUCH**
AMP = 1 per 5m Length
- **AOCTO/RGBW/BTC**
12-24V Bluetooth Smart Controller



ACLED100LL




ACLED/90



ACLED/TC



ACLED/XC



AMLED/LC



ACLED/90/FB



ACLED/RC/AMP



ACLED/RC/TOUCH



AOCTO/RGBW/BTC

ACLED/90B

ACLED/90/FB

ACLED/TC

ACLED/XC

ACLED100/LL

100mm 4000K/3000K/RGB

ACLED500/LL

500mm 4000K/3000K/RGB

ACLED1000/LL

1000mm 4000K/3000K/RGB

ACLED/ML

1000mm 4000K/3000K

ACLED/ML/RGB

1000mm RGB

ACLED/RC/TOUCH

Touch RGB RF Remote Control

ACLED/AMP/TOUCH

Touch RGB Amplifier (Repeater)

AMLED/LC

Flexible Quick-fit Joint

AOCTO/RGBW/BTC

12V - 24V Single CCT / RGB Controller

Controladores

AD30W/12V

30W 12V Constant Voltage Driver


AD75W/12V

75W 12V Constant Voltage Driver

ADDIM75W/12V

75W 12V Dimmable (1-10V or Switch Dim)

Python White Flexible LED Strip Kit



APYLED/KIT/CW	LED	5M 30W 4000K
APYLED/KIT/WW	LED	5M 30W 3000K

Acesorios

AMLED/LC	Flexible Quick-fit Joint
----------	--------------------------




W	30W
Lm/D	
4000K	1800lm
3000K	1600lm
Lm/W 4000K	80lm
Lm/W 3000K	75lm
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 45°C

Viper RGB Flexible LED Strip Kit



191



W	36W
CCT	RGB
V	100V-240V
Hz	50-60Hz
Temp	-20°C to 45°C

AVLED/KIT	LED	5M 36W RGB
Acesorios		
AMLED/LC	Flexible Quick-fit Joint	



Mamba Tunable White Flexible LED Strip Kit



AMLED/KIT/TUNE LED 5M 30W 2500K ↔ 6500K

Acesorios

AMLED/LC Flexible Quick-fit Joint



W	30W
CCT	2500K to 6500K
V	100V-240V
Hz	50-60Hz
Temp	-20°C to 45°C

Concho

193



- 4000K - 3000K Max. 50m
- RGB - Max. 30m
- 1000lm per m 3000K
- 1100lm per m 4000K
- 100lm/W

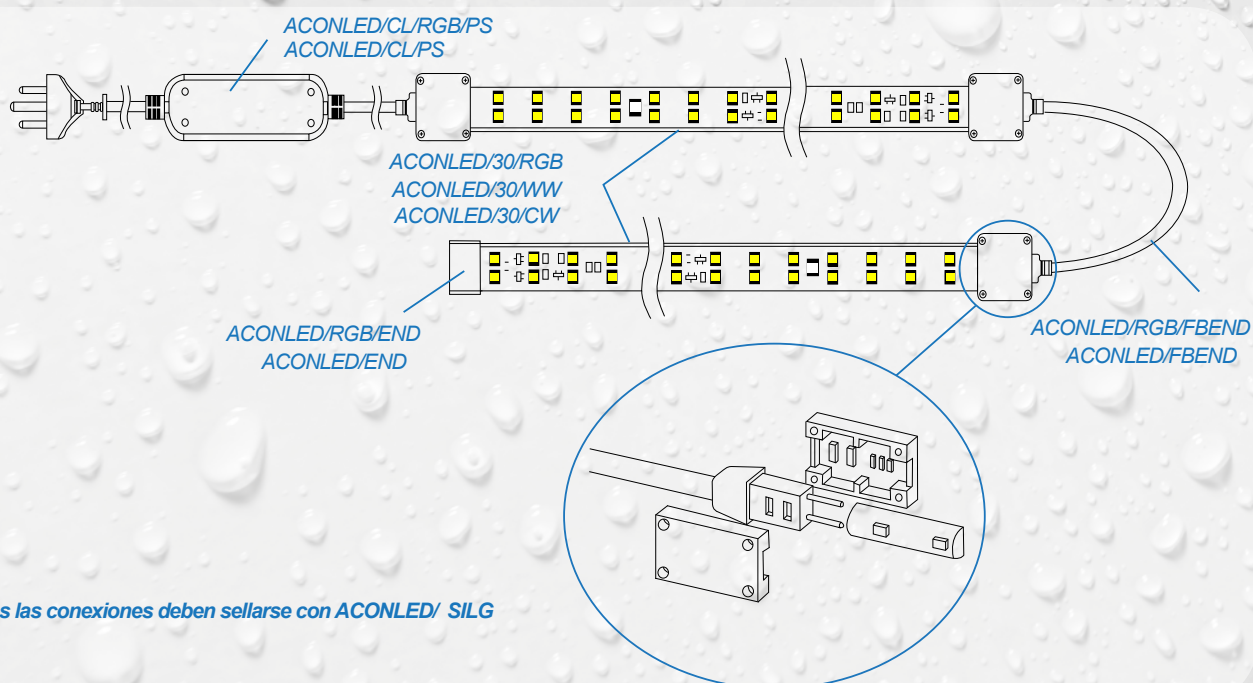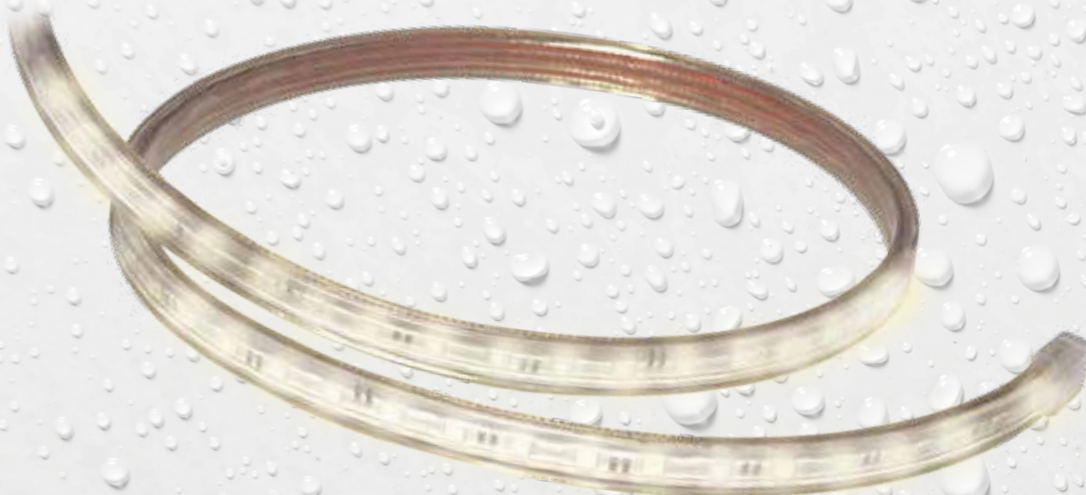


ACONLED/CL/PS




ACONLED/CL/RGB/PS



ACONLED/FBEND



ACONLED/CLIPS



ACONLED/END



ACONLED/SILG

IP65 Concho AC LED Strip (1100lm per m)



3000K



4000K



R



G



B

White LED Cut-Lengths (1 Metre Multiples)

ACONLED/CL/WW	LED	3000K (Per Metre c/w 3 Fixing Clips)
ACONLED/CL/CW	LED	4000K (Per Metre c/w 3 Fixing Clips)
ACONLED/CL/PS	LED	Power Supply (1 Required Per Cut Length)

RGB LED Cut-Lengths (1 Metre Multiples)

ACONLED/CL/RGB	LED	RGB (Per Metre c/w 3 x Clips)
ACONLED/CL/RGB/PS	LED	RGB Power Supply and Touch RF Control (1 Required Per Cut Length)

White LED 50 Metre Drums

ACONLED/50/WW	LED	3000K
ACONLED/50/CW	LED	4000K
ACONLED/50/PS	LED	Power Supply
ACONLED/END	LED	End Cap
ACONLED/SILG	LED	100ml Silicon Glue
ACONLED/CLIPS	LED	3 x Fixing Clips
ACONLED/FBEND	LED	200mm Flexi Bend

RGB LED 30 Metre Drums

ACONLED/30/RGB	LED	RGB
ACONLED/30/RGB/PS	LED	RGB Power Supply (1 Required Per Length)
ACONLED/RGB/FBEND	LED	RGB 200mm Flexi Bend
ACONLED/SILG	LED	100ml Silicon Glue
ACONLED/RGB/END	LED	RGB End Cap
ACONLED/RGB/CLIPS	LED	3 x RGB Fixing Clips




CW-WW


RGB



RGB



White



W	
WH	11W per m
RGB	10W per m
CRI	Ra 80
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 45°C



Matrix LED

196



	=			=	
3W LED		3W T5	7W LED		7W T5
	=			=	
13W LED		13W T5	18W LED		18W T5





				L	W	D
AMALED20/CCT	LED	3W - 4000K/3000K		220	22.8	38.4
AMALED50/CCT	LED	7W - 4000K/3000K		525	22.8	38.4
AMALED80/CCT	LED	13W - 4000K/3000K		858	22.8	38.4
AMALED120/CCT	LED	18W - 4000K/3000K		1158	22.8	38.4

Acesorios

A250TLL/T5	250mm Link Lead
A500TLL/T5	500mm Link Lead
A1000TLL/T5	1000mm Link Lead

	4000K	3000K
W	3W	
	7W	
	13W	
	18W	
Lm/D	290lm	272lm
	712lm	696lm
	1320lm	1268lm
	1844lm	1724lm
Lm/W	97lm	91lm
	102lm	99lm
	102lm	98lm
	102lm	96lm
CRI	Ra 80	
CCT	4000K	
	3000K	
V	230V	
Hz	50/60Hz	
Temp	-10°C to 40°C	



	4000K	3000K
W	6W 10W 16W 22W	
Lm/D	535lm 928lm 1660lm 2205lm	531lm 871lm 1373lm 2090lm
Lm/W	89lm 103lm 111lm 100lm	89lm 87lm 92lm 95lm
CRI	Ra 80	
CCT	4000K 3000K	
V	230V	
Hz	50-60Hz	
Temp	-5°C to 40°C	

				L	W	D
4000K	ALEDKL/30	LED	6W 4000K	321	29	39
	ALEDKL/60	LED	10W 4000K	550	29	39
	ALEDKL/90	LED	16W 4000K	883	29	39
	ALEDKL/120	LED	22W 4000K	1183	29	39
3000K	ALEDKL/30/WW	LED	6W 3000K	321	29	39
	ALEDKL/60/WW	LED	10W 3000K	550	29	39
	ALEDKL/90/WW	LED	16W 3000K	883	29	39
	ALEDKL/120/WW	LED	22W 3000K	1183	29	39

Acesorios


A250TLL/T5	250mm
A500TLL/T5	500mm
A1000TLL/T5	1000mm



Reveal AC LED Cabinet Light



199



ARCLED/CW/W



ARCLED/CW/SS

W	2W
Lm/D	
4000K	146lm
3000K	132lm
Lm/W 4000K	73lm
Lm/W 3000K	66lm
CRI	Ra 80
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-10°C to 40°C

ARCLED/CW/W	LED	2W 4000K	W
ARCLED/CW/SS	LED	2W 4000K	SS
ARCLED/WW/W	LED	2W 3000K	W
ARCLED/WW/SS	LED	2W 3000K	SS




Reveal AC LED Tri-Light



ARLEDTL/CW



ARLEDTL/WW


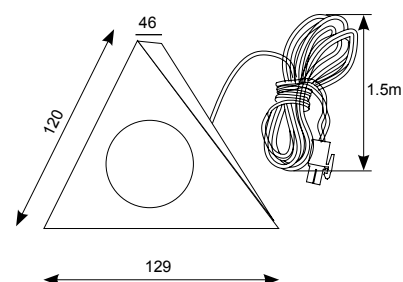


ARLEDTL/CW	LED	2W 4000K	SC
ARLEDTL/WW	LED	2W 3000K	SC

W	2W
Lm/D	
4000K	123lm
3000K	111lm
Lm/W 4000K	61lm
Lm/W 3000K	56lm
CRI	Ra 80
CCT	4000K
	3000K
V	220V-240V
Hz	50-60Hz
Temp	-10°C to 40°C

Trio LED Cabinet Light Kit

201

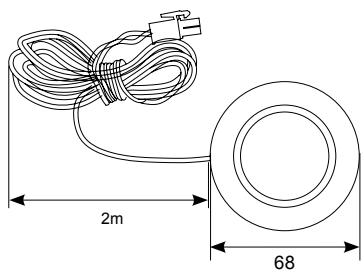

Caja de conexión

W	3 x 3W
Lm/D	3 x 80lm
Lm/W	27lm
CRI	Ra 80
CCT	3000K
V	220V-240V
Hz	50-60Hz
Temp	-20°C to 40°C



ATCKLED/W
(Kit)



ATCKLED/SI
(Kit)



ATCSLED/W
(Individual)



ATCSLED/SI
(Individual)

Kit

ATCKLED/W	LED	3 x 3W 3000K Kit	W
ATCKLED/SI	LED	3 x 3W 3000K Kit	SS

Individual

ATCSLED/W	LED	1 x 3W 3000K Single	W
ATCSLED/SI	LED	1 x 3W 3000K Single	SS



Gamma Mini LED




AMGAMLED



AMGAMLED + AMGAMLEDBZ/CH



50mm





AMGAMLED	LED	11W 4000K
AMGAMLED/WW	LED	11W 3000K

/M3	
/MWS	
/MWS/M3	

Acesorios

AMGAMLEDBZ/CH	CH
----------------------	-----------

W	11W
Lm/D	
4000K	1031lm
3000K	971lm
Lm/W 4000K	94lm
Lm/W 3000K	88lm
CRI	Ra 80
CCT 4000K	4000K
CCT 3000K	3000K
V	220V-240V
Hz	50Hz
Temp	-5°C to 35°C



AGAMLED



AGAMLED + AGAMLEDBZ/CH



W	18W
Lm/D	
4000K	1675lm
3000K	1551lm
Lm/W 4000K	93lm
Lm/W 3000K	86lm
CRI	Ra 80
CCT 4000K	4000K
CCT 3000K	3000K
V	220V-240V
Hz	50Hz
Temp	-5°C to 35°C




AGAMLED	LED	18W 4000K
AGAMLED/WW	LED	18W 3000K

/M3	
/MWS	
/MWS/M3	

Acesorios

AGAMLEDBZ/CH	CH
--------------	----

Beta LED



ABELED/WV

LED



5W 4000K

W	5W
Lm/D	436lm
Lm/W	87lm
CRI	Ra 70
CCT	4000K
V	220V-240V
Hz	50Hz
Temp	0°C to 25°C

Disco Slim LED CCT


Supplied c/w Integral Driver

205




ADSILED1/CCT

IP65



ADSILED1/CCT



ADSILED2/CCT



ADSILED1/CCT +
ADSILED1BZ/CH



ADSILED1/CCT +
ADSILED1BZ/GR

ADSILED1/CCT	LED	7W - 4000K/3000K
ADSILED2/CCT	LED	13W - 4000K/3000K

/M3		(13W only)
/MWS		(13W only)

Acesorios

ADSILED1BZ/CH		(8W)
ADSILED1BZ/GR		(8W)
ADSILED2BZ/CH		(13W)
ADSILED2BZ/GR		(13W)

	4000K	3000K
W	7W	13W
Lm/D	643lm	575lm
	1083lm	1027lm
Lm/W	92lm	82lm
	83lm	79lm
CRI	Ra 80	
CCT	4000K	
	3000K	
V	230V	
Hz	50Hz	
Temp	-10°C to 25°C	



Disco Slim LED

206



ADSILED2



ADSILED1 + ADSILED/1BZ/CH



ADSILED1 + ADSILED/1BZ/GR



ADSILED1	LED	8W 4000K
ADSILED1/WW	LED	8W 3000K

ADSILED2	LED	13W 4000K
ADSILED2/WW	LED	13W 3000K


/M3		(13W only)
/MWS		(13W only)
/MWS/M3/CF		(13W only)

Acesorios

ADSILED/1BZ/CH		CH	(8W)
ADSILED/1BZ/GR		GR	(8W)
ADSILED/2BZ/CH		CH	(13W)
ADSILED/2BZ/GR		GR	(13W)




ADSILED1




ADSILED2

	4000K	3000K
W	8W	13W
Lm/D	584lm	547lm
	1021lm	979lm
Lm/W	73lm	68lm
	79lm	75lm
CRI	Ra 80	
CCT 4000K	4000K	
CCT 3000K	3000K	
V	220V-240V	
Hz	50Hz	
Temp	-10°C to 25°C	

Disco Slim Halo LED



ADSIHLED1



ADSIHLED2

4000K 3000K

W	8W	13W
Lm/D	687lm	605lm
	1198lm	1064lm
Lm/W	86lm	87lm
	92lm	82lm
CRI	Ra 80	
CCT 4000K	4000K	
CCT 3000K	3000K	
V	220V-240V	
Hz	50Hz	
Temp	-10°C to 25°C	



207



ADSIHLED2



ADSIHLED1 + ADSILED/1BZ/CH



ADSIHLED1 + ADSILED/1BZ/GR

ADSIHLED1	LED	8W 4000K
ADSIHLED1/WW	LED	8W 3000K

ADSIHLED2	LED	13W 4000K
ADSIHLED2/WW	LED	13W 3000K

/M3		(13W only)
/MWS		(13W only)
/MWS/M3/CF		(13W only)

Acesorios

ADSILED/1BZ/CH		(8W)
ADSILED/1BZ/GR		(8W)
ADSILED/2BZ/CH		(13W)
ADSILED/2BZ/GR		(13W)



Disco LED

208



ADILED1



ADILED2

ADILED1	LED	8W 4000K
ADILED2	LED	14W 4000K


/M3		(14W only)
/MWS		(14W only)
/MWS/M3/CF		(14W only)

Acesorios

ADI28BZ/BR		BR	(14W)
ADI28BZ/CH		CH	(14W)
ADI28BZ/SG		SG	(14W)




275



ADILED1





326



ADILED2

W	8W
	14W
Lm/D	539lm
	860lm
Lm/W	67lm
	61lm
CRI	Ra 70
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	-10°C to 25°C



AJALED



AJALED + AJALED BZ/CH

W	14W
Lm/D	993lm
Lm/W	66lm
CRI	Ra 80
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	0°C to 25°C

AJALED	LED	14W 4000K
--------	-----	-----------


/M3	
/MWS	
/MWS/M3/CF	

Acesorios

AJALED BZ/CH	CH
--------------	----



Profile Dual Voltage LED Razor Light




Interrupor de configuración
SELV



W	8W
Lm/D	
FP	436lm
NL	33lm
Lm/W	55lm
CRI	Ra 70
CCT	4000K
V	220V-240V
Hz	50-60Hz
Temp	0°C to 40°C

APLEDDVRL LED 8W 4000K

Dual Voltage
Razor Light



211



			L	W	D
ADVRL	284mm	60W White	493	60	71

Dual Voltage Shaver Socket



ADVSS

ADVSS	Dual Voltage Shaver Socket
-------	----------------------------

