





Guardian LED

p413

411



Aplique IP65

420



Cajas de salida

424



Borde suspendido


426



Borde de superficie IP65



Foco doble

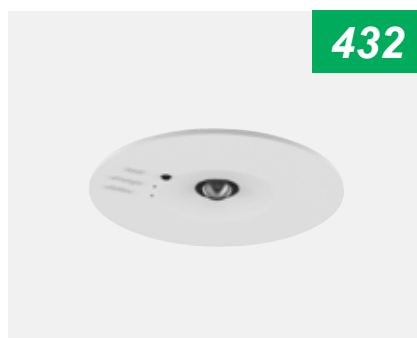

*Downlight de emergencia
LED*



Panel Pod emergencia





Diseñado para
Entregar...

Swift LED Bulkhead



411



Escape route 2 metres wide (1 Lux minimum) *					

Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	1.48	5.9	1.48	5.8	
4	1.2	4	0.72	4.5	
6	-	-	-	-	

Open (Anti-Panic) area (0.5 Lux Minimum) **					

Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	2.35	6	1.98	6	
4	2.24	7.5	1.98	6	
6	2.24	5.9	1.98	5.79	

Normas del Reino Unido mostradas

W	3W
Lm/D	
E Mode	69lm
S Mode	163lm
CCT	6500K
V	220V-230V
Hz	50-60Hz
Temp	0C° to 40C°

ASWTLED/3M	LED	3W Mantenido / Non Mantenido
Bateria		
ASBP/1	3.6V 600mAh Ni-Cd Replacement Battery	



Monarch LED Lithium Bulkhead



M3 =




Escape route 2 metres wide (1 Lux minimum) *					

Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	1.9	5	1.8	5	
4	0.6	2.8	0.5	2.8	
6	-	-	-	-	

Open (Anti-Panic) area (0.5 Lux Minimum) **					

Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	2.2	5.5	2.2	5.5	
4	2.8	6	2.8	6	
6	1.5	6	1.5	6	

Normas del Reino Unido mostradas

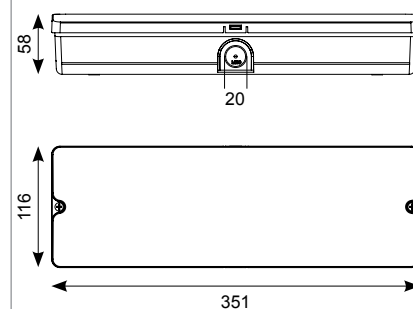

	AMOLED/LI/3M/ST	LED	3W Mantenido / Non Mantenido
--	-----------------	-----	------------------------------

Batería

ASBP/18	3.2V 1500mAh Li-FePO4 Lithium Replacement Battery
---------	---

W	3W
Lm/D	
E Mode	77lm
S Mode	119lm
CCT	6000K
V	220-240V
Hz	50Hz
Temp	5C° to 40C°

Guardian LED Bulkhead



413




M3 =



AGLED/KIT + AGLED/3M

352



Escape route 2 metres wide (1 Lux minimum) *				
***	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
Mounting Height (M)				
2.5	1.7	5.7	2.9	6
4	1.3	5.6	3	5
6	-	-	-	-

Open (Anti-Panic) area (0.5 Lux Minimum) **				
***	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
Mounting Height (M)				
2.5	3	7.5	3	7.5
4	3.8	8	3.8	8
6	3.8	8	3.8	8

Normas del Reino Unido mostradas

W	3W
Lm/D	
E Mode	144lm
S Mode	180lm
CCT	6500K
V	220V-240V
Hz	50-60Hz
Temp	0C° to 40C°

AGLED/3M	LED	3W Mantenido / Non Mantenido
<i>Acesorios</i>		
AGLED/KIT	Semi-Recessing Kit - White	
<i>Bateria</i>		
ASBP/2	3.6V 1500mAh Replacement Ni-Cd Battery	



Kite LED

Emergency Bulkhead



Escape route 2 metres wide (1 Lux minimum) *					

	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
	2.5	1.5	5.5	1.3	5.5
	4	1.3	5	1.4	6
	-	-	-	-	-

Open (Anti-Panic) area (0.5 Lux Minimum) **					

	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
	2.5	2.1	6	2.1	6
	4	2.4	7	2.4	7
	6	2.4	7	2.4	7

Normas del Reino Unido mostradas




AKTLED/3M/ST LED 4W Mantenido / Non Mantenido

Bateria

ASBP/1 3.6V 600mAh Ni-Cd Replacement Battery



M3 =



W	4W
Lm/D	
E Mode	79lm
S Mode	182lm
CCT	6500K
V	220V-240V
Hz	50-60Hz
Temp	0C° to 40C°





Centurion LED Bulkhead

417






M3 =



Performance

ACELED3M/ST > 8W T5	✓
ACELED3M/ST > AGLED3M	✓ +56%

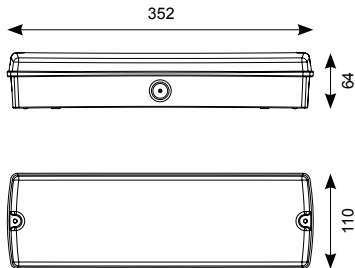

Escape route 2 metres wide (1 Lux minimum) *					

	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
	2.5	1.7	7	2	6.8
	4	2	8.5	2.5	8
	6	-	-	-	-

Open (Anti-Panic) area (0.5 Lux Minimum) **					

	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
	2.5	2.5	7.5	2.5	7.5
	4	3.5	9	3.5	9
	6	3.6	9.5	3.6	9.5

Normas del Reino Unido mostradas

W	7W
Lm/D	
E Mode	151lm
S Mode	254lm
CCT	6500K
V	220V-240V
Hz	50-60Hz
Temp	0C° to 40C°



ACELED/3M/ST

LED

7W Mantenido / Non Mantenido

Bateria

ASBP/2

3.6V 1500mAh Ni-Cd Replacement Battery



Osprey High Rack LED Bulkhead



		Escape route 2 metres wide (1 Lux minimum) *			
***					
Mounting Height (M)		Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
10		-	-	5	20
15		-	-	1.2	15.5

A 3D perspective diagram showing a white rectangular light fixture (AOSLED/3M) mounted on a wall in a corner. Two yellow cones of light emanate from the fixture, illuminating the floor and the adjacent wall. The floor is colored red, and the walls are white. The text 'AOSLED/3M' is written in black below the fixture.

		Open (Anti-Panic) area (0.5 Lux Minimum)**			

Mounting Height (M)		Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
10		5.2	14.5	5.2	18
15		5	17	5	22

Normas del Reino Unido mostradas


AOSLED/3M	LED	9W Mantenido / Non Mantenido
AOSLED/3M/CS	LED	22W Mantenido / Non Mantenido

Batería

ASBP/15	4.8V 4Ah Ni-Cd Replacement Battery
ASBP/16	4.8V 4Ah Ni-Cd Replacement Battery (AOSLED/3M/CS Only)



M3 =

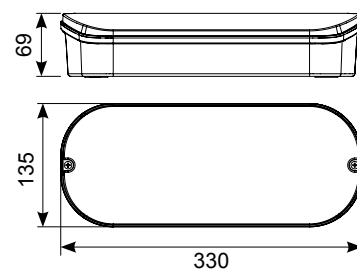

W	9W
	22W
Lm/D	
E Mode	380lm
S Mode	438lm
Lm/D CS	
E Mode	383lm
S Mode	554lm
CCT	6500K
V	230V
Hz	50/60Hz
Temp	0C° to 40C°
CS	-30C° to 5C°




Osprey LED




AOSLED/3M vs. ATS20/3

Configuración para pasillos de almacén con estantes (15 m de altura del techo y 2 m de ancho del pasillo)

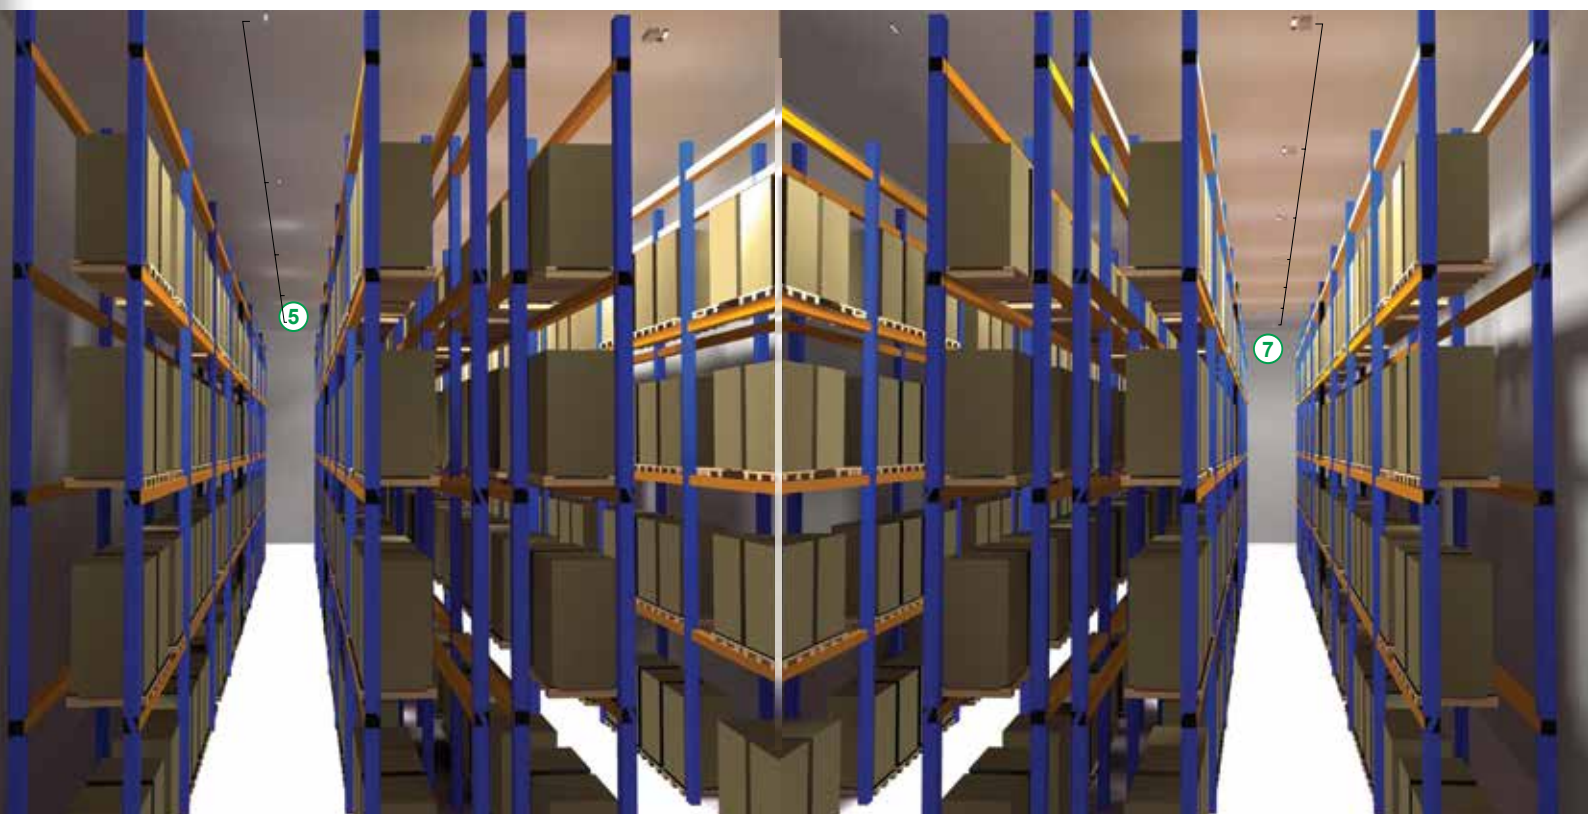

Osprey LED 9W

5 AOSLED/3M = lux level



Halogen Twinspot 2x20W


7 ATS20/3 = lux level



EndLED Lithium Exit Sign



M3 =



AENLED/LI/3M/ST LED 4.5W - Mantenido / Non Mantenido



Batería

ASBP/18 3.2V 1500mAh Li-FePO4 Lithium Replacement Battery

W	4.5W
Lm/D	
E Mode	18lm
CCT	6000K
V	220-240V
Hz	50Hz
Temp	5C° to 40C°

Encore LED Exit Sign

421

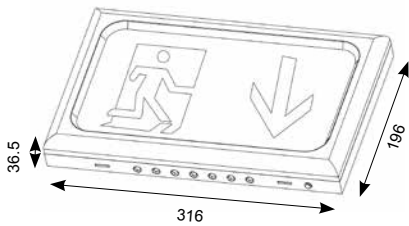

AENLED/3M/W



AENLED/3M/SG

W	2.6W
Lm/D	
E Mode	27lm
CCT	6500K
V	220V-240V
Hz	50-60Hz
Temp	0C° to 40C°



AENLED/3M/W	LED	2.6W Mantenido / Non Mantenido	W
AENLED/3M/SG	LED	2.6W Mantenido / Non Mantenido	SG
AENLED/3M/W/ST	LED	2.6W Mantenido / Non Mantenido	W
Bateria			
ASBP/2		3.6V 1500mAh Ni-Cd Replacement Battery	



Watchman LED Lithium Exit Sign



M3 =

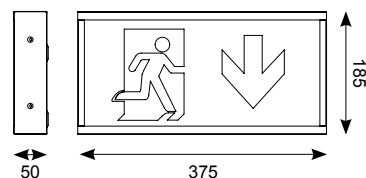

	AWLED/LI/3M/ST	LED	3.5W Mantenido / Non Mantenido
--	-----------------------	-----	--------------------------------

Acesorios

AWLED/L/AD	Lithium Legend	
AWLED/L/AR	Lithium Legend	
AWLED/L/AL	Lithium Legend	
AWLED/L/AU	Lithium Legend	

Batería

ASBP/18	3.2V 1500mAh Li-FePO4 Lithium Replacement Battery
----------------	---

W	3.5W
Lm/D	
E Mode	17lm
CCT	6000K
V	220-240V
Hz	50Hz
Temp	5C° to 40C°


Watchman LED Exit Sign



423



M3 =

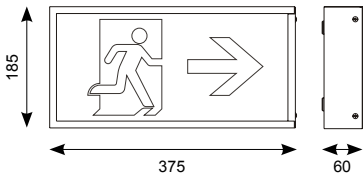


W	3W
Lm/D	
E Mode	25lm
CCT	6000K
V	220V-240V
Hz	50-60Hz
Temp	0C° to 40C°

AWLED/3M	LED	3W Mantenido / Non Mantenido
Acesorios		
AG8/L/AD	Legend	
AG8/L/AR	Legend	
AG8/L/AL	Legend	
AG8/L/AU	Legend	
Bateria		
ASBP/3	3.6V 1800mAh Ni-Cd Replacement Battery	



Eagle 3-In-1 LED Exit Sign

424



AE3LED/3M/SI
Semi Recessed







AE3LED/3M/W
Suspended



AE3LED/3M/W
Side Arm Wall Mounted



M3 =



AE3LED/3M/W	LED	2.5W Mantenido / Non Mantenido	W
AE3LED/3M/SI	LED	2.5W Mantenido / Non Mantenido	SG

AE3LED/3M/W/ST	LED	2.5W Mantenido / Non Mantenido	W
----------------	-----	--------------------------------	---

Acesorios

AE3LED/ALAR	Double Sided Legend	
AE3LED/L/AD	Double Sided Legend	
AE3LED/L/AU	Double Sided Legend	

Batería

ASBP/4	3.6V 800mAh Replacement Ni-Cd Battery
--------	---------------------------------------




Total (W)	2.5W
Lm/D	
E Mode	21lm
CCT	6500K
Input	220V-240V
Hertz	50-60Hz
Operating Temp	0C° to 40C°



Razzo LED Lithium Recessed Exit Sign



M3 =

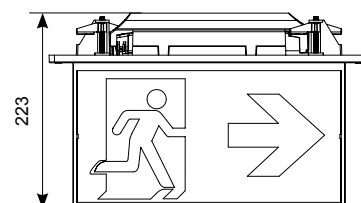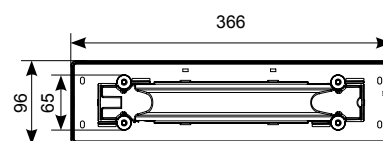

ARAZLED/LI/3M/DA	LED	4.5W Mantenido / Non Mantenido
-------------------------	-----	--------------------------------

Bateria



ASBP/19	6.4V 1500mAh LiFePO4 Lithium Replacement Battery
----------------	--

W	4.5W
Lm/D	
E Mode	100lm
CCT	6000K
V	220-240V
Hz	50Hz
Temp	5C° to 40C°

Harrier LED IP65 Blade Exit Sign



427

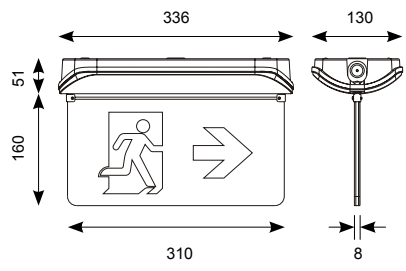

AHARLED/3M/ST +
AHARLED/L/AD



AHARLED/3M/ST

W	5W
Lm/D	
E Mode	142lm
S Mode	299lm
CCT	6500K
V	220V-240V
Hz	50-60Hz
Temp	0C° to 40C°

AHARLED/3M/ST	LED	5W Mantenido / Non Mantenido
<i>Acesorios</i>		
AHARLED/ALAR	Harrier LED Double Sided Legend	
AHARLED/L/AD	Harrier LED Double Sided Legend	
AHARLED/L/AU	Harrier LED Double Sided Legend	
<i>Bateria</i>		
ASBP/5	7.2V 1500mAh Ni-Cd Replacement Battery	







IP65 Owl LED
Twin Spot



429




W	5W
Lm/D	440lm
	**lm Per head
CCT	6500K
V	220V-240V
Hz	50-60Hz
Temp	0C° to 40C°





ATSLED/3NM/IP65/ST	LED	5W Non Mantenido
Bateria	ASBP/6	3.6V 6Ah Ni-Cd Replacement Battery



LED Twin Spot



M3 =

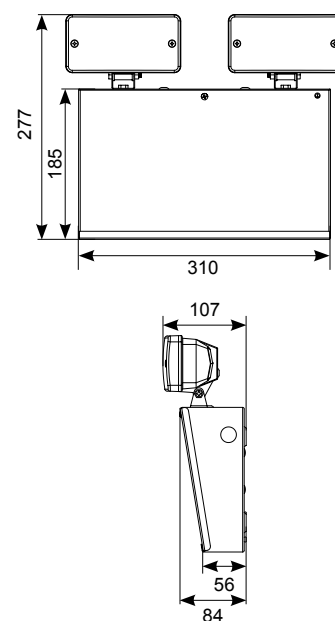

ATSLED/3NM LED 3W Non Mantenido

Bateria



ASBP/7 3.6V 4Ah Ni-Cd Replacement Battery

W	3W
Lm/D	
E Mode	198lm
CCT	6500K
V	220V-240V
Hz	50-60Hz
Temp	0C° to 40C°

Condor LED Twin Spot



431

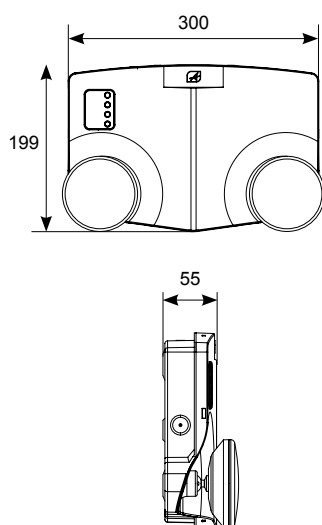

ACTSLED/W/3NM



ACTSLED/B/3NM

W	5W
Lm/D	
E mode	
ACTSLED/W/3NM	368lm
ACTSLED/B/3NM	361lm
CCT	6500K
V	230V
Hz	50/60Hz
Temp	0C° to 40C°

ACTSLED/W/3NM	LED	5W	W
ACTSLED/B/3NM	LED	5W	B

Bateria

ASBP/6	3.6V 6Ah Ni-Cd Replacement Battery
--------	------------------------------------




Signal Pro LED Lithium Emergency Downlight



ASPRLED/LI/3M/DA
OA




ASPRLED/LI/3M/DA
ER

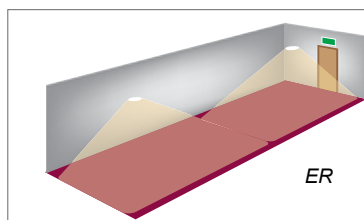

ER

Escape route 2 metres wide (1 Lux minimum) *				

Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
2.5	-	-	6	14
4	-	-	5.5	16
6	-	-	-	-

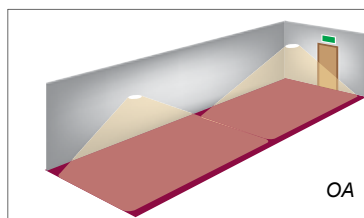

OA

Open (Anti-Panic) area (0.5 Lux Minimum)**				





Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
2.5	4	8	4	8
4	4.7	9	4.7	9
6	4.9	9.5	4.9	9.5

*Normas del Reino Unido mostradas

ASPRLED/LI/3M/DA	LED	2.5W - Non Mantenido
------------------	-----	----------------------

Batería

ASBP/19	6.4V 1500mAh LiFePO4 Lithium Replacement Battery
---------	--

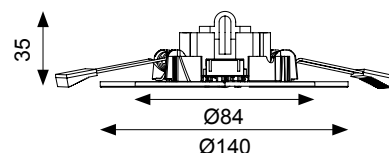




ASBP/19

W	2.5W
Lm/D	
OA	209lm
ER	201lm
CCT	6000K
V	220-240V
Hz	50Hz
Temp	5°C to 40°C

Signal LED Emergency Downlight



433



ASBP/8

ASLED/3NM

ASLED/3NM/B

		Escape route 2 metres wide (1 Lux minimum) *				
		***	□ ↔ ▨	□ ↔ □	□ ↔ ▨	□ ↔ □
	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
	2.5	3	8.5	3	8.5	
	4	3	9	3	9	
	2.5	2.7	7	2.7	7	
	4	2.6	7.5	2.6	7.5	

		Open (Anti-Panic) area (0.5 Lux Minimum) **				
		***	□ ↔ ▨	□ ↔ □	□ ↔ ▨	□ ↔ □
	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
	2.5	3.6	7.5	3.6	7.5	
	4	3.6	10.5	3.6	10.5	
	6	3.6	11	3.6	11	
	2.5	3	6.3	3	6.3	
	4	3	9	3	9	
	6	3	10.5	3	10.5	

*Normas del Reino Unido mostradas

W	1.5W
Lm/D	
ASLED/3NM	137lm
ASLED/3NM/B	107lm
CCT	6500K
V	220V-240V
Hz	50-60Hz
Temp	0°C to 40°C

ASLED/3NM	LED	1.5W - Non Mantenido	● W
ASLED/3NM/B	LED	1.5W - Non Mantenido	● BL




Bateria

ASBP/8	3.6V 2Ah Ni-Cd Replacement Battery
--------	------------------------------------



Beacon LED

Emergency Adjustable Downlight



ASBP/9

Escape route 2 metres wide (1 Lux minimum) *					

Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	2	5.25	2	5.25	
4	2.5	6.5	2.5	6.5	
6	-	-	-	-	

Open (Anti-Panic) area (0.5 Lux Minimum) **					

Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	2.25	5.7	2.25	5.7	
4	2.5	7.1	2.5	7.1	
6	3	8.25	3	8.25	

Normas del Reino Unido mostradas

ABLED/3NM LED 5W - Non Mantenido

Batería



ASBP/9 3.6V 4.5Ah Ni-Cd Replacement Battery

W	5W
Lm/D	248lm
CCT	6500K
V	220V-240V
Hz	50-60Hz
Temp	0°C to 40°C

Beacon LED Fixed Emergency Downlight



435



ASBP/9

Escape route 2 metres wide (1 Lux minimum) *					

	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
	2.5	-	-	3	9.5
	4	-	-	3.3	11.5
	6	-	-	-	-

Open (Anti-Panic) area (0.5 Lux Minimum) **					

	Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
	2.5	3.5	8.9	3.5	8.9
	4	4	11.4	4	11.4
	6	4.5	12.9	4.5	12.9

Normas del Reino Unido mostradas

W	5W
Lm/D	
E mode	316lm
CCT	6500K
V	230V
Hz	50Hz
Temp	0°C to 40°C

ABFLED/3NM	LED	5W - Non Mantenido
------------	-----	--------------------

Bateria

ASBP/9	3.6V 4.5Ah Ni-Cd Replacement Battery
--------	--------------------------------------



Raven LED

Lithium Emergency Downlight



Downlight de emergencia con
inversor integral y batería



ARALED/ER/3NM/ST



ARALED/OA/3NM/ST

Escape route 2 metres wide (1 Lux minimum) *					
Mounting Height (M)	***				
	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	-	-	4	10	
4	-	-	3	11	
6	**	**	**	**	



Open (Anti-Panic) area (0.5 Lux Minimum) **					
Mounting Height (M)	***				
	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	2.5	4.88	2.5	4.88	
4	2.8	6.69	2.8	6.69	
6	2	8.5	2	8.5	

Normas del Reino Unido mostradas


ARALED/ER/3NM/ST	LED	3W - Non Mantenido ER
ARALED/OA/3NM/ST	LED	3W - Non Mantenido OA

Batería

ASBP/14	3.2V 2600mA Li-FePO4 Lithium Replacement Battery
---------	--



OA




ER

W	3W
Lm/D	
ARALED/OA/3NM/ST	114lm
ARALED/ER/3NM/ST	90lm
CCT	6500K
V	220-240V
Hz	50-60Hz
Temp	0C° to 40C°


Merlin LED Emergency Downlight

437



AMELED/OA/3NM/ST

AMELED/ER/3NM/ST/B

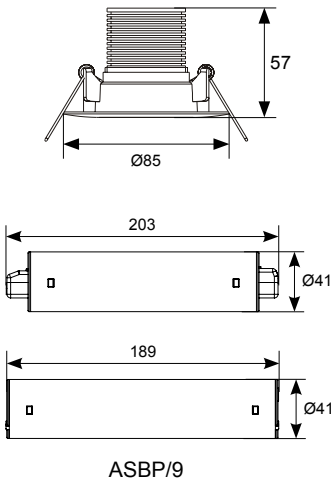

ASBP/9

		Escape route 2 metres wide (1 Lux minimum) *				
		***	□ ↔ ▨	□ ↔ □	□ ↔ ▨	□ ↔ □
Mounting Height (M)		Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	AMELED/ER/3NM/ST	-	-	5.5	14	
4	AMELED/ER/3NM/ST/B	-	-	7.5	19.6	
2.5		-	-	5	14	
4		-	-	7	19.5	

		Open (Anti-Panic) area (0.5 Lux Minimum)**				
		***	□ ↔ ▨	□ ↔ □	□ ↔ ▨	□ ↔ □
Mounting Height (M)		Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
2.5	AMELED/OA/3NM/ST	3	6.5	3	6.5	
4		4	9.5	4	9.5	
6		5	11.5	5	11.5	
2.5	AMELED/OA/3NM/ST/B	3	6	3	6	
4		4	9	4	9	
6		4.5	10	4.5	10	

Normas del Reino Unido mostradas

AMELED/ER/3NM/ST	LED	5W - Non Mantenido ER	W
AMELED/OA/3NM/ST	LED	5W - Non Mantenido OA	W
AMELED/ER/3NM/ST/B	LED	5W - Non Mantenido ER	BL
AMELED/OA/3NM/ST/B	LED	5W - Non Mantenido OA	BL

Batería

ASBP/9	3.6V 4.5Ah Ni-Cd Replacement Battery
--------	--------------------------------------

W	5W
Lm/D	/B
AMELED/OA/3NM/ST	259lm 191lm
AMELED/ER/3NM/ST	247lm 229lm
CCT	6500K
V	230V
Hz	50/60Hz
Temp	0°C to 40°C

International: +44 (0) 1942 433343
Warrington: +44 (0) 1942 433333
Belfast: +44 (0) 2890 773750






Falcon LED Surface Emergency Downlight



439



M3 =



AFALED/3NM/ST/IP65



AFALED/3NM/ST/IP65/B



Open Area Lens



Escape Route Lens

		Escape route 2 metres wide (1 Lux minimum) *				
		***	□ ↔ ▨	□ ↔ □	□ ↔ ▨	□ ↔ □
Mounting Height (M)		Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
AFALED/ER/3NM/ST	2.5	-	-	4.2	10	
	4	-	-	4.25	12	
AFALED/ER/3NM/ST/B	2.5	-	-	4	9.5	
	4	-	-	3.6	11	

		Open (Anti-Panic) area (0.5 Lux Minimum)**				
		***	□ ↔ ▨	□ ↔ □	□ ↔ ▨	□ ↔ □
Mounting Height (M)		Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial	
AFALED/OA/3NM/ST	2.5	2.5	5	2.5	5	
	4	3.5	7.1	3.5	7.1	
	6	4	9.8	4	9.8	
AFALED/OA/3NM/ST/B	2.5	2.5	4.8	2.5	4.8	
	4	3.5	6.8	3.5	6.8	
	6	4	9.8	4	9.8	

Normas del Reino Unido mostradas

W	3W	
Lm/D		
E mode	/B	
OA	152lm	142lm
ER	138lm	116lm
CCT	6500K	
V	230V	
Hz	50/60Hz	
Temp	0°C to 40°C	

AFALED/3NM/ST/IP65	LED	3W - Non Mantenido	W
AFALED/3NM/ST/IP65/B	LED	3W - Non Mantenido	B

Bateria

ASBP/10	3.6V 3Ah Ni-Cd Replacement Battery
---------	------------------------------------



LED Panel Pod Emergency for Infinite and Endurance LED Panels



Top Housing View




Bottom Housing View
showing Emergency LED



PASO 1

Desenroscar el enchufe de monedas de la parte posterior de los paneles LED Ansell

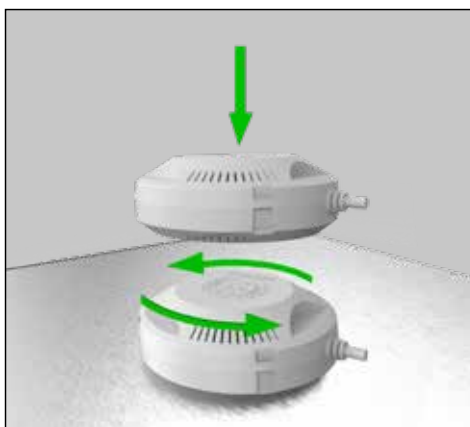

PASO 2


Localice y gire el Pod del panel en su posición. Conecte el suministro entrante al cable pre-leaded



M3 =



- UK Patent No. GB2522285
- European Patent No. 15165652.7
- Irish Patent No. 2015/0128
- EC Registered Design No 002712232-0001




Panel Pod™

AIRMLD/POD/3NM/ST	LED	5W 4000K
-------------------	-----	----------

Batería

ASBP/11	3.6V 4.5Ah Ni-Cd Replacement Battery
---------	--------------------------------------

W	5W
Lm/D	189lm
CCT	6500K
V	220V-240V
Hz	50-60Hz
Temp	0C° to 45C°



ACFLP/3

ACFLP/3 LED - Mantenido / Non Mantenido