

PHILIPS

Emergency Lighting

**REAL
PROs
REAL
QUALITY**

Stand Alone Emergency

2021 Philips Professional
Luminaires portfolio



Emergency Family

Self contained stand alone emergency luminaires

- Meet legal requirements
- Manual testing via key switch
- All legend kits available
- 1 Year Warranty (including battery)



Name	Bulkhead	Wall & Ceiling Blade	Suspended Blade	Wall Mount Exit Sign	IP65 Surface Spot	Recessed Spot	Twin Spot
Wattage	3W	2.8W	2.2W	3W	2W	4W	6W
Mains Lm	150lm	35lm	24lm	45lm	Non maintained	Non maintained	Non maintained
Em lm	150lm	25lm	22lm	34lm	145lm	180lm	350lm
Battery	Ni-Cd AA 3.6V 1500mAh	Ni-Cd AA 3.6V 800mAh	Ni-Cd AA 3.6V 800mAh	Ni-Cd AA 3.6V 800mAh	Ni-Cd AA 3.6V 2000mAh	LiFePO4	Ni-Cd AA 3.6V 3500mAh
Beam angle	50°	120°	120°	120°	160° & 90x50° (corridor)	105°	120°
Temperature	0°C - 40°C	0°C - 40°C	0°C - 40°C	0°C - 40°C	0°C - 40°C	0°C - 40°C	0°C - 40°C
Class	Class II / IP65	Class I / IP20	Class I / IP20	Class I / IP20	Class II / IP65	Class I / IP20	Class II / IP65



**REAL
PROs**
**REAL
QUALITY**

Stand Alone Emergency


Bulkhead

Main applications

Offices / Healthcare / Retail / Education

Specifications

Power	3W
Lumen output mains	150lm
Emergency Lumens	150lm
Emergency duration	>3h
Battery	Ni-Cd AA 3.6V 1500mAh
Beam angle	50°
Temperature	0°C - 40°C
Mounting	Ceiling / wall mount
Class II / IP65	

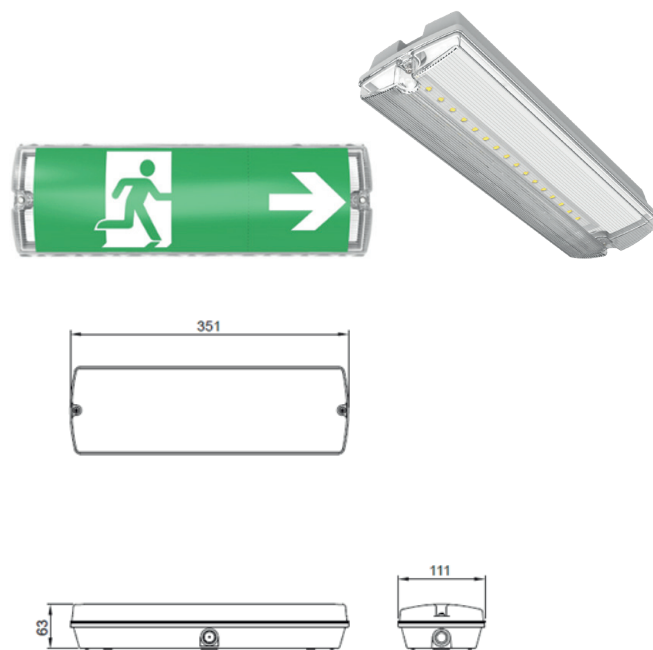

Wall & Ceiling Blade

Main applications

Offices / Healthcare / Retail / Education

Specifications

Power	2.8W
Lumen output mains	35lm
Emergency Lumens	25lm
Emergency duration	>3h
Battery	Ni-Cd AA 3.6V 1500mAh
Beam angle	120°
Temperature	0°C - 40°C
Mounting	Ceiling / wall mount Adjustable
Class II / IP20	






Suspended Blade

Main applications

Offices / Healthcare / Retail / Education

Specifications

Power	2.2W
Lumen output mains	24lm
Emergency Lumens	22lm
Emergency duration	>3h
Battery	Ni-Cd AA 3.6V 800mAh
Beam angle	120°
Temperature	0°C - 40°C
Mounting	Ceiling suspended
Class I / IP20	

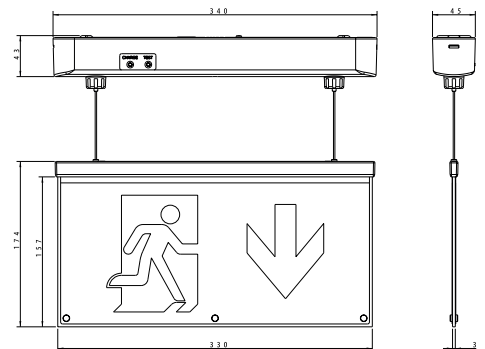


Wall Mount Exit Sign

Main applications

Offices / Healthcare / Retail / Education

Specifications

Power	3W
Lumen output mains	45lm
Emergency Lumens	34lm
Emergency duration	>3h
Battery	Ni-Cd AA 3.6V 800mAh
Beam angle	120°
Temperature	0°C - 40°C
Mounting	Wall mount
Class I / IP20	

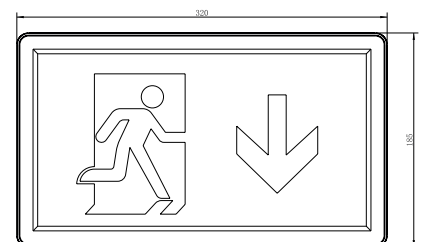

IP65 Surface Spot

Main applications

Offices / Healthcare / Retail / Education

Specifications

Power	3W
Emergency lumens	145lm
Emergency duration	>3h
Battery	Ni-Cd AA 3.6V 2000mAh
Beam angle	160° & 90x50° (corridor) Interchangeable
Temperature	0°C - 40°C
Mounting	Ceiling mount
Class I / IP65	




Recessed Spot

Main applications

Offices / Healthcare / Retail / Education

Specifications

Power	4W
Emergency lumens	180lm
Emergency duration	>3h
Battery	LiFePO4
Beam angle	105°
Temperature	0°C - 40°C
Mounting	Recessed
Class I / IP20	

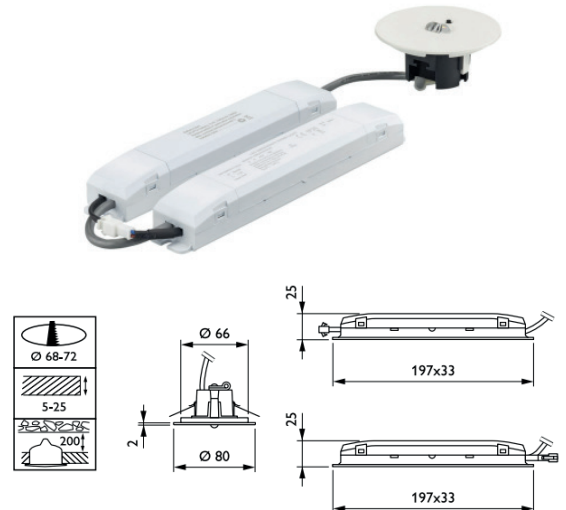


Twin Spot

Main applications

Industrial / Warehousing

Specifications

Power	6W
Emergency lumens	350lm
Emergency duration	>3h
Battery	Ni-Cd AA 3.6V 3500mAh
Beam angle	120°
Temperature	0°C - 40°C
Mounting	Wall mount
Class II / IP65	

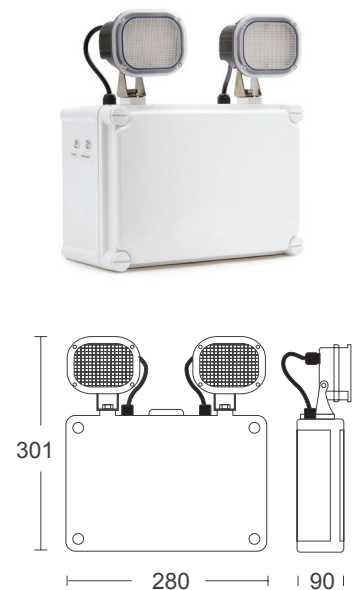



Range name	Material description	Sales text	Length	Width	Depth	EAN	12NC
	EM SM BKD EXIT SIGN M3 ELB3 IP65	Surface mounted emergency bulkhead, 3W, 150lm output, Maintained, basic 3hr emergency, IP65 with legend kit included	37.7cm	11.5cm	6.7cm	5016356636454	919013004531
Bulkhead							
	EM WL/CM BLADE M3 ELB3 ISO UP	Wall/ceiling exit sign comes with arrow up legend - [EM WL/CM BLADE]	37.5cm	27.6cm	6.5cm	5016356636508	919013004536
	EM WL/CM BLADE LEGEND ISO LEFT/ RIGHT	Arrow left and arrow right legends, ISO7010 format for EM WL/CM BLADE	36cm	18cm	0.2cm	5016356636515	919013004537
Wall & Ceiling Blade	EM WL/CM BLADE LEGEND ISO DOWN	Arrow down legend, ISO7010 format for EM WL/CM BLADE	36cm	18cm	0.2cm	5016356636522	919013004538
	EM SUS BLADE M3 ELB3 ISO UP	Suspended exit sign with arrow up legend - [EM SUS BLADE]	37.5cm	27.6cm	6.5cm	5016356636539	919013004539
	EM SUS BLADE LEGEND ISO LEFT/ RIGHT	Arrow left and arrow right legends, ISO7010 format for EM SUS BLADE	35.5cm	18.5cm	0.2cm	5016356636546	919013004540
Suspended Blade	EM SUS BLADE LEGEND ISO DOWN	Arrow down legend, ISO7010 format for EM SUS BLADE	35.5cm	18.5cm	0.2cm	5016356636553	919013004541
	EM WL EXIT SIGN M3 ELB3 ISO UP	Emergency slim exit box with arrow up legend - [EM WL EXIT SIGN]	33cm	19.5cm	3.5cm	5016356636461	919013004532
	EM WL EXIT SIGN LEGEND ISO LEFT	Arrow left legend, ISO7010 format for EM WL EXIT SIGN	35.5cm	18.5cm	0.2cm	5016356636478	919013004533
	EM WL EXIT SIGN LEGEND ISO RIGHT	Arrow right legend, ISO7010 format for EM WL EXIT SIGN	35.5cm	18.5cm	0.2cm	5016356636485	919013004534
Wall Mount Exit Sign	EM WL EXIT SIGN LEGEND ISO DOWN	Arrow down legend, ISO7010 format for EM WL EXIT SIGN	35.5cm	18.5cm	0.2cm	5016356636492	919013004535
	EM SM SPOT LED OA/ CO NM3 ELB3 IP65	Surface mounted standalone emergency spot, 145lm output, 2 interchangeable lens open area & corridor, Non-Maintained, Basic 3hr emergency, IP65	16cm	16cm	5.5cm	5016356636584	919013004544
Surface Spot							
	EM120B LED2S EL3 WH	Recessed standalone emergency spot, 180m output, Non-Maintained, Basic 3hr emergency, IP20. 2 interchangeable lens included	62cm	3.3cm	4.5cm	8718699791469	912401483241
Recessed Spot							
	EM SM TWIN SPOT NM3 ELB3 IP65	Surface mounted, 2 x 3W LED Twin Spot, 350lm output, Optics 120deg, Non- maintained, Basic 3hr emergency, IP65	28.5cm	30.5cm	9.5cm	5016356636560	919013004542
Twin Spot							

