

# GLASS T8

- 50% energy saving against fluorescent for similar lux levels
- Retrofit with most T8 luminaires (non-dimming)
- Shorted end, supplied with dummy replacement LED starter
- Fragment retention PET film
- Integrated Constant Current driver
- Operating temperature environment is -20°C to 40°C
- G13 cap
- Ignition time - <0.5 sec
- Start up time (95%) - <0.5 sec
- Tubes are powered from one end (fitting rewiring may be required)
- Compatible Luceco emergency battery pack available




## GLASS

CAT NO.	DESCRIPTION	SIZE	LUMENS	WATTAGE	EFFICACY lm/W	COLOUR TEMP	EQUIVALENT WATTAGE	OUTER QUANTITY
LT8G2N10W11-01	Standard	2ft/600mm	1100	10W	110	4000K	16W	25
LT8G2C10W11-01	Standard	2ft/600mm	1100	10W	110	6500K	16W	25
LT8G4N18W20-01	Standard	4ft/1200mm	2000	18W	110	4000K	30W	25
LT8G4C18W20-01	Standard	4ft/1200mm	2000	18W	110	6500K	30W	25
LT8G4N22W24-01	Standard	4ft/1200mm	2400	22W	110	4000K	36W	25
LT8G4C22W24-01	Standard	4ft/1200mm	2400	22W	110	6500K	36W	25
LT8G5N22W24-01	Standard	5ft/1500mm	2400	22W	110	4000K	36W	25
LT8G5C22W24-01	Standard	5ft/1500mm	2400	22W	110	6500K	36W	25
LT8G5N32W35-01	Standard	5ft/1500mm	3500	32W	110	4000K	45W	25
LT8G5C32W35-01	Standard	5ft/1500mm	3500	32W	110	6500K	45W	25
LT8G6N40W44-01	Standard	6ft/1800mm	4400	40W	110	4000K	72W	25
LT8G6C40W44-01	Standard	6ft/1800mm	4400	40W	110	6500K	72W	25

## ECO GLASS

CAT NO.	DESCRIPTION	SIZE	LUMENS	WATTAGE	EFFICACY lm/W	COLOUR TEMP	EQUIVALENT WATTAGE	OUTER QUANTITY
LT8G2N10W90-01	Standard	2ft/600mm	950	10W	95	4000K	16W	25
LT8G2C10W90-01	Standard	2ft/600mm	950	10W	95	6500K	16W	25
LT8G4N18W16-01	Standard	4ft/1200mm	1700	18W	94	4000K	30W	25
LT8G5N22W20-01	Standard	5ft/1500mm	2000	22W	91	4000k	30W	25

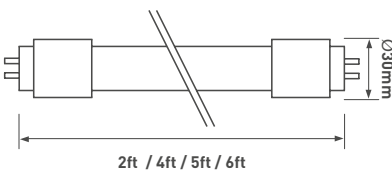

-01