



COLLINGWOOD
LIGHTING



FEATURES & BENEFITS

- > 100lm/W+
- > Insulation coverable
- > Uses latest single point source technology to replicate traditional halogen look
- > Mains dimmable as standard
- > Compact integral driver for easy installation
- > Push-fit terminal connector included
- > LED downlight complete with bezel for a straightforward fit

H2 Lite T

Dimmable, fire-rated LED downlight complete with bezel and terminal connector

Suitable for use in bathrooms |
 Push-fit terminal connector included |
 Insulation coverable |
 High efficacy |
 4-year extended warranty available

* IP65 (front) / IP20 (back) | * Ceiling only | Patent information: collingwoodlighting.com/patent ZONE L70, B10 3SDCM

PHOTOMETRICS @ 25°C

Colour	Beam angle	Finish	Product code	CRI	lm	lm/W	lx at 1m
4000K	55°	B / steel	DLT388BS5540	>80Ra	460	105	527
	55°	Matt white	DLT388MW5540	>80Ra	460	105	527
3000K	55°	B / steel	DLT388BS5530	>80Ra	440	100	504
	55°	Matt white	DLT388MW5530	>80Ra	440	100	504

GENERAL

Building regulations	Part B (fire protection), C (moisture protection), E (acoustic protection), P (electrical safety) and L (conservation of energy - 2014 regulations)
Construction material	Mild steel / plastic insulation protector
Flicker free	Yes
Inrush current	1A 0.25ms
Maximum ceiling thickness	40mm

WIRING


Cable / flying lead	0.15m (Class II)
Cable required for 'T' Connector	Push-fit terminal for: Twin & Earth (6242Y 2x1.5mm ²) or 3-core cable (R02V 3x1.5mm ²)
Type of wiring required	Parallel (mains) 220-240V AC 50/60Hz

LED DRIVERS


Product code	Input voltage	Input current	Power factor	Dimming	Bathroom zone
N/A (integrated SELV driver)	220-240V	-	>0.8	Yes (mains)	1 (ceiling only)

ACCESSORIES

Product code	Description	
DLCONVERT70	Converter plate	81
DM298GRID	LED mains grid dimmer	82
DM298FP	Faceplate dimmer	82

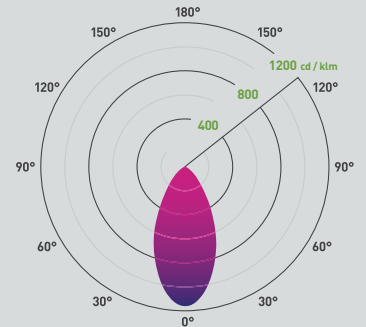

4000K 55°
Additional diagrams available at collingwoodlighting.com

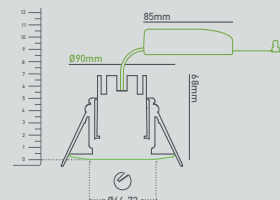

This luminaire contains built-in LED lamps.

 The lamps cannot be changed in the luminaire.

 874/2012