




COLLINGWOOD
LIGHTING



FEATURES & BENEFITS

- > Adjustable LED fittings
- > Equivalent to 50W Halogen & 100W AR111
- > Straight to mains
- > Robust cable for outdoor use

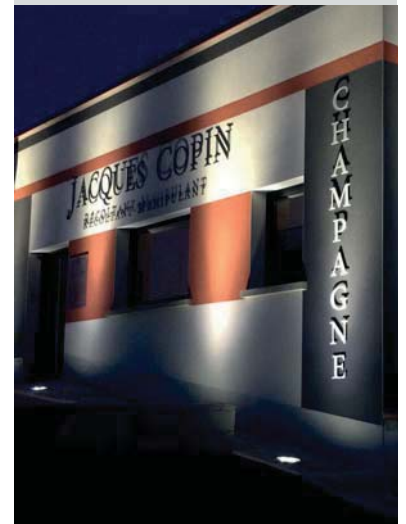

GL09

Triple LED drive over ground light



Perfect for outdoor use



3 year extended warranty available



ZONE

L70, B10

35DCM

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	60°	GL09D60X40	>80Ra	1515	59	1266
	38°	GL09D38X40	>80Ra	1515	59	3453
	24°	GL09D24X40	>80Ra	1515	59	5471
3000K	60°	GL09D60X30	>80Ra	1500	59	1253
	38°	GL09D38X30	>80Ra	1500	59	3419
	24°	GL09D24X30	>80Ra	1500	59	5417

GENERAL

Construction material	Stainless Steel 304 (cover ring) / Aluminium (body)
Drive over / Walk over	Drive over, 12mm tempered glass (15mph max), static load 2000kg / 20KN
Inrush current	2.8A 0.2ms

WIRING


Cable/flying lead	1m H05RN-F rubberised cable (outside diameter: 7mm)
Type of wiring required	Parallel (mains) 220-240V AC 50/60Hz

LED DRIVERS

Product code	mA	Dimming	Bathroom zone	Min	Max
N/A (driver built in)	-	No	2	-	-


ACCESSORIES

Product code	Description	
Installation tube (included)		
JB5	Gel filled waterproof connector	281
WC 5-9	Quick waterproof connector	280

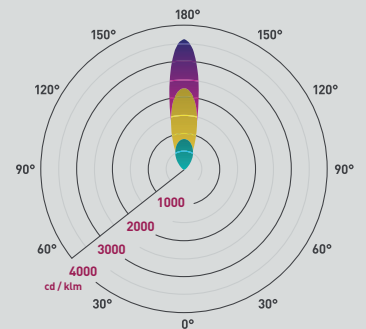

4000K 24° / 4000K 38° / 4000K 60°

Additional diagrams available at collingwoodlighting.com



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

LED

A++
A+
A
C
D

874/2012

