



COLLINGWOOD  
LIGHTING






FEATURES & BENEFITS


- › Adjustable LED fittings
- › Equivalent to 50W Halogen & 100W AR111
- › Straight to mains
- › Robust cable for outdoor use

GL08

Twin LED drive over ground light

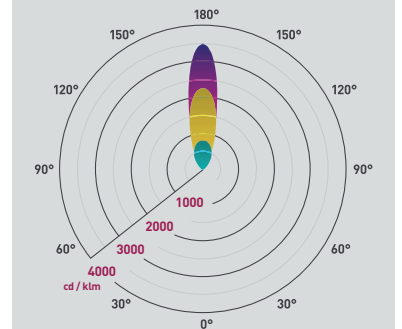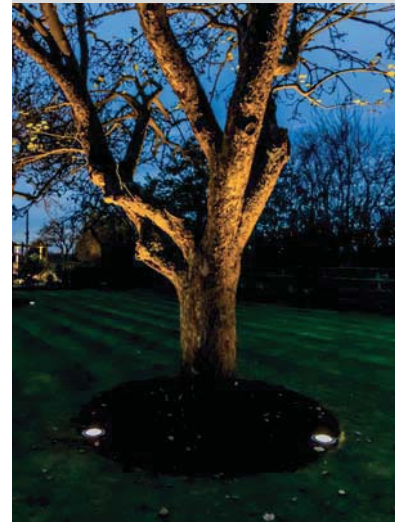

4000K 24° / 4000K 38° / 4000K 60°  
Additional diagrams available at [collingwoodlighting.com](http://collingwoodlighting.com)



This luminaire contains built-in LED lamps. **A+** **A+** **A** } LED

The lamps cannot be changed in the luminaire. **C** **D** **E**

COLLINGWOOD LIGHTING 874/2012

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	60°	GL08D60X40	>80Ra	1010	59	801
	38°	GL08D38X40	>80Ra	1010	59	2286
	24°	GL08D24X40	>80Ra	1010	59	3533
3000K	60°	GL08D60X30	>80Ra	1000	59	793
	38°	GL08D38X30	>80Ra	1000	59	2264
	24°	GL08D24X30	>80Ra	1000	59	3498

GENERAL

Construction material	Stainless Steel 304 (cover ring) / Aluminium (body)
Drive over / Walk over	Drive over, 10mm tempered glass (15mph max), static load 2000kg / 20KN
Inrush current	1.8A 0.2ms

WIRING

Cable/flying lead	1m H05RN-F rubberised cable (outside diameter: 7mm)
Type of wiring required	Parallel (mains) 220-240V AC 50/60Hz

LED DRIVERS

Product code	mA	Dimming	Bathroom zone	Min	Max
N/A (driver built in)	-	No	2	-	-

ACCESSORIES

Product code	Description	
Installation tube (included)		
JB5	Gel filled waterproof connector	281
WC 5-9	Quick waterproof connector	280