




COLLINGWOOD
LIGHTING



FEATURES & BENEFITS

- › Adjustable LED fittings
- › Equivalent to 50W Halogen
- › Robust cable for outdoor use
- › Straight to mains

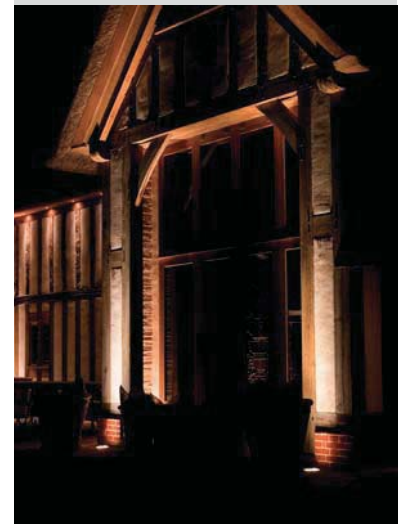

GL07

Drive over LED ground light

IP67

Perfect for outdoor use

3

3 year extended warranty available

W

Also available in RGBW See page 242



8.5W

240V

20°

<35°C

IK10

1/40°C

2.8kg

2

70,000h



ZONE

L70, B10

3SDCM

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	60°	GL07D60X40	>80Ra	505	59	399
	38°	GL07D38X40	>80Ra	505	59	1177
	24°	GL07D24X40	>80Ra	505	59	1597
3000K	60°	GL07D60X30	>80Ra	500	59	395
	38°	GL07D38X30	>80Ra	500	59	1165
	24°	GL07D24X30	>80Ra	500	59	1582

GENERAL

Construction material	Stainless Steel 304 (cover ring) / Aluminium (body)
Drive over / Walk over	Drive over, 10mm tempered glass (15mph max), static load 2000kg / 20KN
Inrush current	0.92A 0.13ms

WIRING


Cable/flying lead	1m H05RN-F rubberised cable (outside diameter: 7mm)
Type of wiring required	Parallel (mains) 220-240V AC 50/60Hz

LED DRIVERS

Product code	mA	Dimming	Bathroom zone	Min	Max
N/A (driver built in)	-	No	2	-	-


ACCESSORIES

Product code	Description	
Installation tube (included)		
JB5	Gel filled waterproof connector	281
WC 5-9	Quick waterproof connector	280

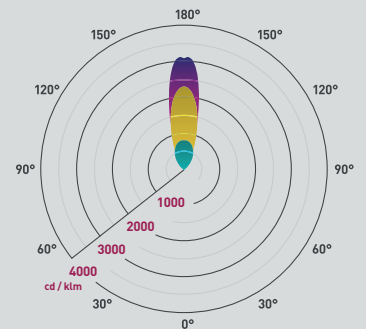

4000K 24° / 4000K 38° / 4000K 60°

Additional diagrams available at collingwoodlighting.com



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

A++

A+

A

C

D

}

L

E

D

874/2012

