



## GL050 | GL051

3W LED ground / marker light | Square 3W LED ground / marker light



Submersible to 9m



7-year extended warranty available



Also available in RGBW (GL050)  
See page 246



Patent information: [collingwoodlighting.com/patent](http://collingwoodlighting.com/patent)

### PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	100°	GL050 NW	>70Ra	50	17	20
	100°	GL051 NW	>70Ra	50	17	20
3000K	100°	GL050 WW	>80Ra	46	15	16
	100°	GL051 WW	>80Ra	46	15	16
Blue	100°	GL050 BLUE	-	-	-	-
	100°	GL051 BLUE	-	-	-	-

### GENERAL

Construction material	Stainless steel (316)
Drive over / walk over	Walk over (5mm toughened glass)

### WIRING

Cable / flying lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of wiring required	Series

### LED DRIVERS

Bathroom zone applicable to fitting only

Product code	mA	SELV	Dimming	Bathroom zone	Min	Max
PLU/350 1-9	350	Yes	No	1	1	3
PLR/350 1-5	350	Yes	No	0	1	1
PLD UNI-DRIVE 350MA	350	Yes	Yes (1-10V)	2	1	3



For LED driver bathroom zone & additional LED drivers see page 264

### ACCESSORIES

Product code	Description	
JB2 / JB4 / JB6	IP68 waterproof connectors	280-281
TUBE/68	Installation tube	124
WCR 275 BLACK	2-core rubber cable	281
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	280

## FEATURES & BENEFITS

- > Frosted effect for softer tone of light
- > Robust cable for outdoor use

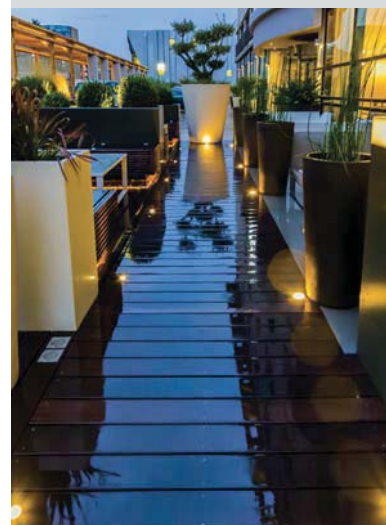

### 4000K 100°

Additional diagrams available at [collingwoodlighting.com](http://collingwoodlighting.com)

