



GL019

1W mini LED ground light

IP68

Submersible
to 9m

7-year extended
warranty available

12/38°

1W

Ø33

32°C

IK07

1.35°C

200g

0

70,000h

35DCM

Patent information: collingwoodlighting.com/patent

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	38°	GL019 F NW	>70Ra	90	90	320
	12°	GL019 S NW	>70Ra	90	90	1543
3000K	38°	GL019 F WW	>80Ra	70	70	249
	12°	GL019 S WW	>80Ra	70	70	1200
Amber	38°	GL019 F AMBER	-	-	-	-
	12°	GL019 S AMBER	-	-	-	-
Blue	38°	GL019 F BLUE	-	-	-	-
	12°	GL019 S BLUE	-	-	-	-
Green	38°	GL019 F GREEN	-	-	-	-
	12°	GL019 S GREEN	-	-	-	-
Red	38°	GL019 F RED	-	-	-	-
	12°	GL019 S RED	-	-	-	-

GENERAL

Construction material	Stainless steel (316)
Drive over / walk over	Walk over (5mm toughened glass)

WIRING

Cable / flying lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of wiring required	Series

LED DRIVERS

Bathroom zone applicable to fitting only

Product code	mA	SELV	Dimming	Bathroom zone	Min	Max
PLU/350 1-9	350	Yes	No	1	1	9
PLR/350 1-5	350	Yes	No	0	1	5
PLD UNI-DRIVE 350MA	350	Yes	Yes (1-10V)	2	1	10


For LED driver bathroom zone & additional LED drivers see page 264

ACCESSORIES

Product code	Description	
JB2 / JB4 / JB6	IP68 waterproof connectors	280-281
TUBE/33	Installation tube	124
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	280



FEATURES & BENEFITS

- › Compact yet powerful fitting
- › Shallow depth for easy installation
- › Robust cable for outdoor use



4000K 12° / 4000K 38°

Additional diagrams available at collingwoodlighting.com

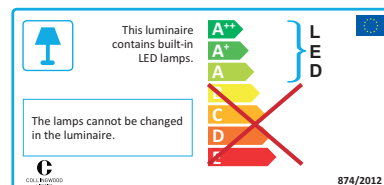

874/2012