



WL060 | WL160

Straight to mains LED halo / flood wall light

IP65

Suitable for use outdoors

7-year extended warranty available

110°

2.6W

240V

<40°C

1.40°C

600g

2

70,000h

35DCM

Patent information: collingwoodlighting.com/patent

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	110°	WL060 NW	>70Ra	82	32	46
	110°	WL160 NW	>70Ra	82	32	46
3000K	110°	WL060 WW	>80Ra	58	22	26
	110°	WL160 WW	>80Ra	58	22	26

GENERAL

Construction material: Anodised aluminium

Inrush current: 9A 0.8ms

WIRING

Cable / flying lead: 0.3m Live, Neutral & Earth

Type of wiring required: Parallel (mains) 220-240V AC, 50-60Hz

LED DRIVERS

Product code	mA	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	-	No	2	-	-


ACCESSORIES

Product code: Description

There are currently no accessories associated with this product

FEATURES & BENEFITS

- Complete with wall fixings and waterproof crimp connectors
- Halo effect for decoration
- LED flood light for illumination

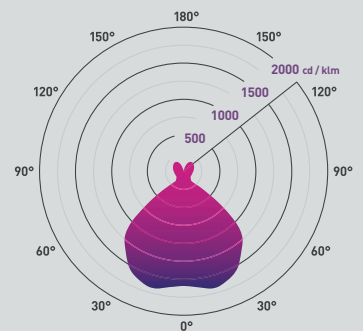

4000K 110°

Additional diagrams available at collingwoodlighting.com

