



COLLINGWOOD  
LIGHTING



FEATURES & BENEFITS

- › Complete with wall fixings
- › Straight to mains
- › Mains waterproof connector included
- › Max. 3 on 500W mains dimmer  
Max. 5 on 1000W mains dimmer
- › Compatible with many leading lighting control systems



FL200

Dimmable linear LED flood light

- IP65** Ideal for use outdoors
- 7-year extended warranty** available

- 50°
- 21W
- 240V
- 180°
- 360°
- <math>\leq 40^{\circ}\text{C}</math>
- 1.35°C
- 1.3kg
- 2
- L70, B10
- 3SDCM

Patent information: [collingwoodlighting.com/patent](http://collingwoodlighting.com/patent)

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	50°	FL200FNW	>70Ra	1415	67	2300
3000K	50°	FL200FWW	>80Ra	1292	62	2050

GENERAL

Construction material	Anodised aluminium (body) stainless steel 316 (bracket)
Inrush current	15A 0.5ms

WIRING


Cable / flying lead	N/A (IP65 waterproof connector)
Type of wiring required	Parallel (mains) 220-240V AC 50/60Hz

LED DRIVERS


Product code	mA	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	700	Yes (mains)	2	-	-

ACCESSORIES

Product code	Description
Dimming options	Call us on 01604 495151 for more information

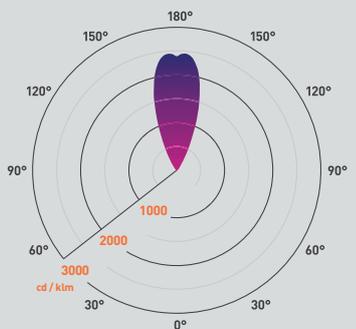

4000K 50°  
Additional diagrams available at [collingwoodlighting.com](http://collingwoodlighting.com)



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

**LED**

A+ A A C D E

COLLINGWOOD LIGHTING 874/2012