



COLLINGWOOD  
LIGHTING



## SL040A

High output LED spike light

IP65

Ideal for use outdoors

7-year extended warranty available

7-year extended warranty available



Patent information: [collingwoodlighting.com/patent](http://collingwoodlighting.com/patent)

ZONE

L70, B10

35DCM

### PHOTOMETRICS @ 25°C

| Colour           | Beam angle | Product code | CRI   | lm  | lm/W | lx at 1m |
|------------------|------------|--------------|-------|-----|------|----------|
| 4000K            | 38°        | SL040A F NW  | >70Ra | 520 | 74   | 1471     |
|                  | 18°        | SL040A S NW  | >70Ra | 520 | 74   | 4614     |
| 3000K            | 38°        | SL040A F WW  | >80Ra | 413 | 59   | 1168     |
|                  | 18°        | SL040A S WW  | >80Ra | 413 | 59   | 3665     |
| 2700K <b>NEW</b> | 38°        | SL040A F 27  | >80Ra | 377 | 54   | 1066     |
| <b>NEW</b>       | 18°        | SL040A S 27  | >80Ra | 377 | 54   | 3345     |

### GENERAL

Construction material Anodised aluminium

### WIRING

Cable / flying lead 3m H05RN-F rubberised cable (outside diameter: 6mm)

Type of wiring required Series

### LED DRIVERS

Bathroom zone applicable to fitting only

| Product code        | mA  | SELV | Dimming     | Bathroom zone | Min | Max |
|---------------------|-----|------|-------------|---------------|-----|-----|
| PLU/700 3-9         | 700 | Yes  | No          | 1             | 1   | 3   |
| PL/IP/700 1-3       | 700 | Yes  | No          | 1             | 1   | 1   |
| PLD UNI-DRIVE 700MA | 700 | Yes  | Yes (1-10V) | 2             | 1   | 3   |


For LED driver bathroom zone & additional LED drivers see page 264

### ACCESSORIES

| Product code    | Description                                                |         |
|-----------------|------------------------------------------------------------|---------|
| JB2 / JB4 / JB6 | Waterproof junction box / Gel filled waterproof connectors | 280-281 |
| WCR 275 BLACK   | 2-core rubber cable                                        | 281     |
| PDC/GRID DIMMER | 1-10V dimmer module                                        | 280     |

## FEATURES & BENEFITS

- › Equivalent to 35W halogen
- › Long spike included for extra stability
- › Robust cable for outdoor use
- › Hooded for reduced glare

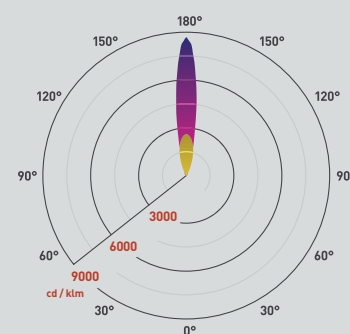

4000K 18° / 4000K 38°

Additional diagrams available at [collingwoodlighting.com](http://collingwoodlighting.com)

