



Colour Finish



White
LA14/**W**



Black
LA14/**B**

LED Types

- LED 2500, 4000, 5500.
- 4000 K as standard.
- 3000 K on request.

Materials


- Body: mild steel in white textured (RAL9016) or black (RAL9005) textured finish.
- End caps: premium polycarbonate.
- Diffuser: clear or microprism.

Installation

- The Liniair™ comes as standard with a 2m suspension kit, (2m power cable as standard).

Standards


- IP20.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class 1.

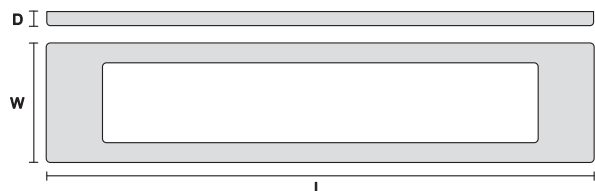


Size

Length	1380mm
Width	250mm
Depth	26mm

LA14/WM4LED2500



LA14/WK4LED2500



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
LA14/WM4LED2500	White	Microprism	4000 K	22 W	2590 lm	119 lm/W
LA14/WM4LED4000	White	Microprism	4000 K	33 W	3872 lm	119 lm/W
LA14/WM4LED5500	White	Microprism	4000 K	45 W	5356 lm	118 lm/W
LA14/WK4LED2500	White	Clear	4000 K	22 W	2500 lm	115 lm/W
LA14/WK4LED3500	White	Clear	4000 K	33 W	3735 lm	115 lm/W
LA14/WK4LED5000	White	Clear	4000 K	45 W	5169 lm	114 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M (217 lm)



PIR
P



DALI / DSI Dim
-DDD



Self-Test Emergency
Prefix **LA14ST** / Suffix **M**