

Liniair™ Wall Mounted

Designed, Developed &
Manufactured in the UK



Colour Finish



White
LA8/**W**



Black
LA8/**B**

LED Types

- LED 2500, 4000, 5500.
- 4000 K as standard.
- 3000 K on request.

Materials


- Body / wall mount: mild steel in white textured (RAL9016) or black (RAL9005) textured finish.
- End caps: premium polycarbonate.
- Diffuser: clear or microprism.

Installation

- Wall Mounted.

Standards

- IP20.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class 1.

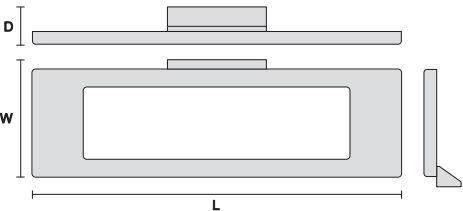

Size

Length	800mm
Width	250mm
Depth	26mm

Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
LA8W/WM4LED3000	White	Microprism	4000 K	44 W	3178 lm	72 lm/W
LA8W/WM4LED3500	White	Microprism	4000 K	56.5 W	3599 lm	63.7 lm/W
LA8W/WM4LED4500	White	Microprism	4000 K	70 W	4306 lm	61.4 lm/W

Code options (add suffix to code)



DALI / DSI Dim
-DDD



Switch Dim
-DD