
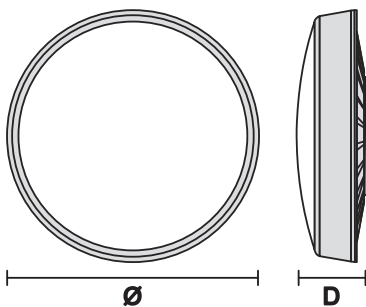


Solas™ Luna

Designed, Developed & Manufactured in the UK

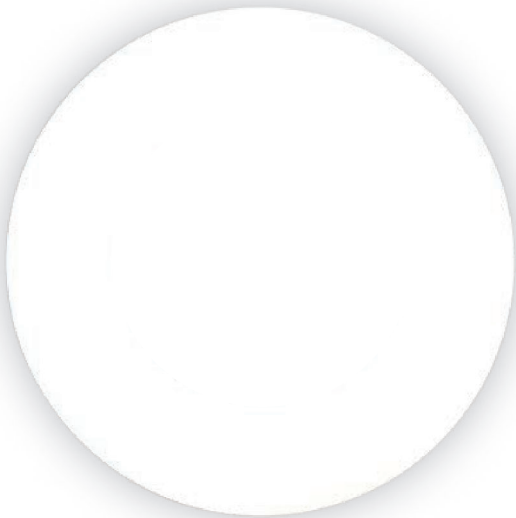

Size	
Diameter	444mm
Depth	123mm

LED Types

- LED 2500, 3000.
- 4000 K as standard.
- 3000 K on request.

Materials


- Body: Premium opal polycarbonate.
- Trim: Polycarbonate.

Installation

- Wall or ceiling mount.
- BESA fixing in centre of rear housing.

Standards

- IP20.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class 1.



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
SSL/WL4LED2500	White	Premium Opal	4000 K	26.4 W	2499 lm	94.7 lm/W
SSL/WL4LED3000	White	Premium Opal	4000 K	34.2 W	3030 lm	88.6 lm/W

Code options (add suffix to code)

 3 Hour Maintained Emergency M (204 lm)	 e-Motion™ Microwave Master Dim -CFP	 DALI / DSI Dim -DDD	 Self-Test Emergency Prefix SSLST/ Suffix M
 Microwave On/Off -9	 e-Motion™ Microwave Slave Dim -CFS	 Switch Dim -DD	 Corona Options Red Corona SSL/..R Blue Corona SSL/..U