

Solas™ Eclipse

Designed, Developed & Manufactured in the UK



Colour Finish



White
SSE/**W**



Satin Aluminium
SSE/**F**



Titanium
SSE/**X**

LED Types

- LED 2500, 3000.
- 4000 K as standard.
- 3000 K on request.

Materials


- Body: Premium opal polycarbonate.
- Trim: Polycarbonate.

Installation

- Wall or ceiling mount.
- BESA fixing in centre of rear housing.

Standards


- IP20.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class 1.

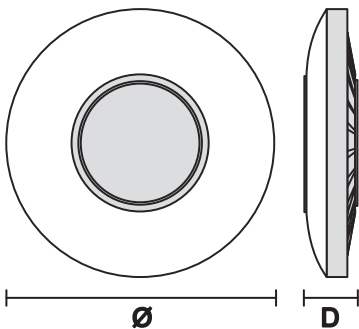


Size

Diameter	444mm
Depth	88mm

SSE/WL4LED2500



SSE/WL4LED3000



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
SSE/WL4LED2500	White	Premium Opal	4000 K	28 W	2529 lm	90.3 lm/W
SSE/WL4LED3000	White	Premium Opal	4000 K	36.3 W	3043 lm	83.8 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M (179 lm)



e-Motion™ Microwave Master Dim
-CFP



DALI / DSI Dim
-DDD



Self-Test Emergency
Prefix **SSEST/** Suffix **M**



Microwave On/Off
-9



e-Motion™ Microwave Slave Dim
-CFS



Switch Dim
-DD



Corona Options
Red Corona **SSE/_R**
Blue Corona **SSE/_U**