


Harmony 355mm

Designed, Developed &
Manufactured in the UK



Colour Finish

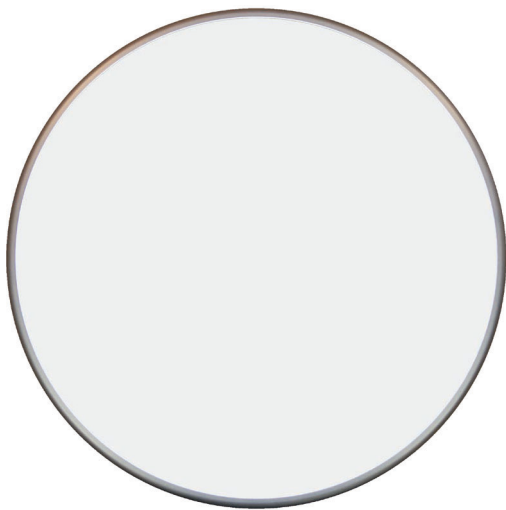

White
H3/**W**



Satin Aluminium
H3/**F**



Chrome
H3/**H**



Brass
H3/**Z**

LED Types

- LED 1800.
- LED 3000.

Materials


- Body: Spun aluminium in white / chrome / brass / satin aluminium.
- Diffuser: Vandal resistant polycarbonate in premium opal, with self-extinguishing fire properties.

Installation

- Wall or ceiling mount.
- BESA fixing and rear cable entry. 3 way mains terminal block. 4 way terminal block for emergency versions.
- Semi recessing kit available as an accessory - Code: CSS/RK1LED.

Standards

- IP20.
- IP44 option available.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class 1.

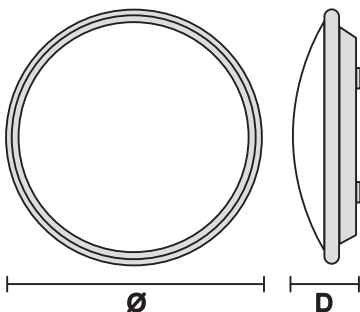


Size


Diameter	355mm
Depth	105mm

Recess Hole Dimension
296mm

H3/WL4LED1800



H3/WL4LED3000



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
H3/WL4LED1800	White	Premium Opal	4000 K	17 W	1625 lm	95.5 lm/W
H3/WL4LED3000	White	Premium Opal	4000 K	24 W	2789 lm	116 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M (110 - 170 lm)



e-Motion™ Microwave Master Dim
-CFP



DALI / DSI Dim
-DDD



IP44
-B1



Microwave On/Off
-9



e-Motion™ Microwave Slave Dim
-CFS



Switch Dim
-DD