


Harmony 432mm

Designed, Developed &
Manufactured in the UK



Colour Finish

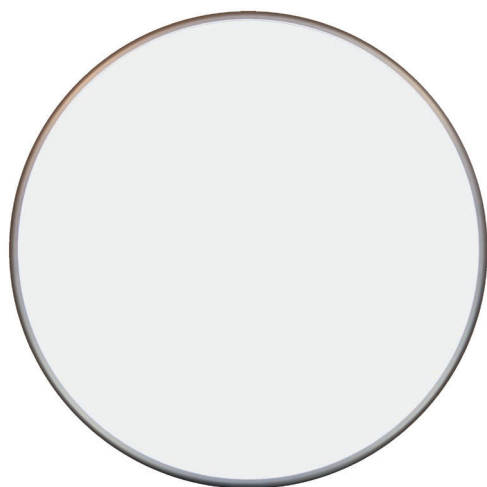

White
H4/**W**



Satin Aluminium
H4/**F**



Chrome
H4/**H**



Brass
H4/**Z**

LED Types

- LED 1800.
- LED 3000.
- LED 4000.

Materials


- Body: Spun aluminium in white / chrome / brass / satin aluminium.
- Diffuser: Vandal resistant polycarbonate in premium opal, with self-extinguishing fire properties.

Installation

- Wall or ceiling mount.
- BESA fixing and rear cable entry. 3 way mains terminal block. 4 way terminal block for emergency versions.
- Semi recessing kit available as an accessory - Code: CSS/RK1LED.

Standards

- IP20.
- IP44 option available.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class 1.

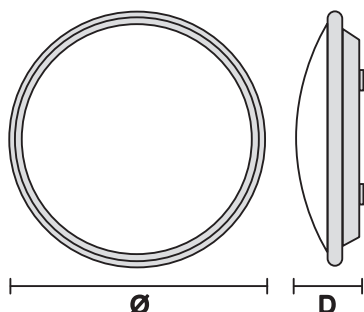


Size


Diameter	432mm
Depth	108mm

Recess Hole Dimension
412mm


H4/WL4LED1800



H4/WL4LED3000



H4/WL4LED4000



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
H4/WL4LED1800	White	Premium Opal	4000 K	16.8 W	1670 lm	99.4 lm/W
H4/WL4LED3000	White	Premium Opal	4000 K	21.7 W	2367 lm	109 lm/W
H4/WL4LED4000	White	Premium Opal	4000 K	32.7 W	3409 lm	104 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M (275 lm)



e-Motion™ Microwave Master Dim
-CFP



DALI / DSI Dim
-DDD



IP44
-B1



Microwave On/Off
-9



e-Motion™ Microwave Slave Dim
-CFS



Switch Dim
-DD



Wireless Control
-BT