


# Harmony 532mm

Designed, Developed &  
Manufactured in the UK



### Colour Finish

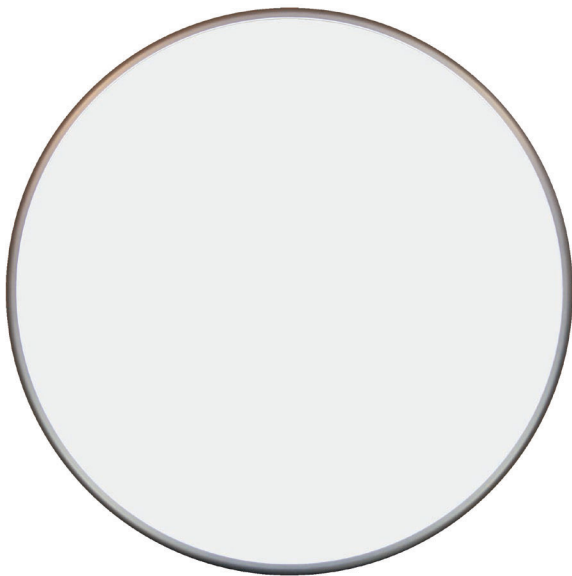

White  
H5/**W**



Satin Aluminium  
H5/**F**



Chrome  
H5/**H**



Brass  
H5/**Z**

### LED Types

- LED 3000.
- LED 4000.

### Materials


- Body: Spun aluminium in white / chrome / brass / satin aluminium.
- Diffuser: Vandal resistant polycarbonate in premium opal, with self-extinguishing fire properties.

### Installation

- Wall or ceiling mount.
- BESA fixing and rear cable entry. 3 way mains terminal block. 4 way terminal block for emergency versions.
- Semi recessing kit available as an accessory - Code: CSS/RK1LED.

### Standards

- IP20.
- IP44 option available.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class 1.

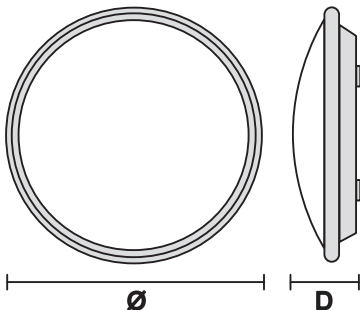


### Size


|          |       |
|----------|-------|
| Diameter | 532mm |
| Depth    | 108mm |

Recess Hole Dimension  
**512mm**

H5/WL4LED3000



H5/WL4LED4000



| Code          | Colour | Diffuser     | Colour Temp. | System Power | Delivered Lumens | Efficacy |
|---------------|--------|--------------|--------------|--------------|------------------|----------|
| H5/WL4LED3000 | White  | Premium Opal | 4000 K       | 21.6 W       | 2334 lm          | 108 lm/W |
| H5/WL4LED4000 | White  | Premium Opal | 4000 K       | 32.6 W       | 3388 lm          | 104 lm/W |

Code options (add suffix to code)



3 Hour Maintained Emergency  
**M** (275 lm)



e-Motion™ Microwave Master Dim  
**-CFP**



DALI / DSI Dim  
**-DDD**



IP44  
**-B1**



Microwave On/Off  
**-9**



e-Motion™ Microwave Slave Dim  
**-CFS**



Switch Dim  
**-DD**